

Schema documentation for XML- Schema_ALISE.xsd

march 9, 2023

Table of Contents

Resource hierarchy:	5
Namespace: "http://vdv/ka/alise/2"	6
Schema(s)	6
Main schema XML-Schema_ALISE.xsd	6
Element(s)	6
Element tns:TerminalGruppe_ID_Type / tns:terminalGruppenNummer	6
Element tns:TerminalGruppe_ID_Type / tns:pv_ID	6
Element tns:TX_IDENTAM_Type / tns:amTerminalGruppe_ID	7
Element tns:TX_IDENTAM_Type / tns:amTerminal_ID	7
Element tns:TX_IDENTAM_Type / tns:amAenderungsreferenz_ID	7
Element tns:TX_IDENTAM_Type / tns:appInstanz_ID	8
Element tns:TX_IDENTAM_Type / tns:logTransaktionsOperator_ID	8
Element tns:TX_IDENTAM_Type / tns:berBerechtigung_ID	8
Element tns:TX_IDENTAM_Type / tns:prodProdukt_ID	9
Element tns:TX_IDENTAM_Type / tns:prodKeyOrganisation_ID	9
Element tns:TX_IDENTAM_Type / tns:berStatus	9
Element tns:TX_IDENTAM_Type / tns:berSynchronNummer	10
Element tns:TXAAUFBER_Type / tns:amAktionGueltigBis	10
Element tns:TXAAUFBER_Type / tns:berInfoText	10
Element tns:TXAAUFBER_Type / tns:amMKPV-NM-MAC_ID	11
Element tns:TXAAUFBER_Type / tns:amMKKVP-NM-MAC_ID	11
Element tns:TXAAUFBER_Type / tns:amMKERF-NM-MAC_ID	11
Element tns:TXAAUFBER_Type / tns:tx_ber	12
Element tns:TXAAUFBER_Type / tns:tx_identam	12
Element tns:TXAAUFBER_Type / tns:berProduktspezTeil	13
Element tns:TXAAUFBER_Type / tns:ZusatzdatenTarifbereich	13
Element tns:TXXEAUFBER_Type / tns:amAktionGueltigBis	14
Element tns:TXXEAUFBER_Type / tns:tx_identam	14
Element tns:TXRAUFBER_Type / tns:amAktionGueltigBis	15
Element tns:TXRAUFBER_Type / tns:tx_identam	15
Element tns:TXAFREIBER_Type / tns:berBerechtigung_ID	16
Element tns:TXAFREIBER_Type / tns:berSynchronNummer	16
Element tns:TXAFREIMITBER_Type / tns:berBerechtigung_ID	16
Element tns:TXAFREIMITBER_Type / tns:berSynchronNummer	17
Element tns:TXAINF_Type / tns:transMediennummer	17
Element tns:TXAINF_Type / tns:transAppInstanz_ID	17
Element tns:TXAINF_Type / tns:transAppGueltigkeitsende	18
Element tns:TXASAINF_Type / tns:transMediennummer	18
Element tns:TXASAINF_Type / tns:transAppInstanz_ID	18
Element tns:TXAML_Type / tns:amListeSender_ID	18
Element tns:TXAML_Type / tns:amListeEmpfaenger_ID	19
Element tns:TXAML_Type / tns:amListeNummer	19
Element tns:TXAML_Type / tns:amListeZeitstempel	19
Element tns:TXAML_Type / tns:txalisber	20
Element tns:TXALISBER_Type / tns:amAuftragsTyp	20
Element tns:TXALISBER_Type / tns:logTransaktionsTyp	21
Element tns:TXALISBER_Type / tns:berInfoText	22
Element tns:TXALISBER_Type / tns:amMKPV-NM-MAC_ID	22
Element tns:TXALISBER_Type / tns:amMKKVP-NM-MAC_ID	22
Element tns:TXALISBER_Type / tns:amMKERF-NM-MAC_ID	23
Element tns:TXALISBER_Type / tns:tx_ber	23
Element tns:TXALISBER_Type / tns:tx_identam	24
Element tns:TXALISBER_Type / tns:berProduktspezTeil	24
Element tns:TXAML_Type / tns:txalisber	25
Element tns:TXRLISBER_Type / tns:amAuftragsTyp	25
Element tns:TXRLISBER_Type / tns:logTransaktionsTyp	25
Element tns:TXRLISBER_Type / tns:tx_identam	26
Element tns:TXAML_Type / tns:txalisber	27
Element tns:TXELISBER_Type / tns:amAuftragsTyp	28
Element tns:TXELISBER_Type / tns:logTransaktionsTyp	28

Element tns:TXELISBER_Type / tns:tx_identam	29
Element tns:TXAMTL_Type / tns:amListeSender_ID	30
Element tns:TXAMTL_Type / tns:amListeEmpfaenger_ID	30
Element tns:TXAMTL_Type / tns:amListeNummer	30
Element tns:TXAMTL_Type / tns:amListeZeitstempel	31
Element tns:TXAMTL_Type / tns:txalisber	31
Element tns:TXAMTL_Type / tns:txrlisber	32
Element tns:TXAMTL_Type / tns:txelisber	32
Element tns:TXAMDL_Type / tns:amListeSender_ID	33
Element tns:TXAMDL_Type / tns:amListeEmpfaenger_ID	33
Element tns:TXAMDL_Type / tns:amListeNummer	33
Element tns:TXAMDL_Type / tns:amListeZeitstempel	34
Element tns:TXAMDL_Type / tns:amListePruefsumme	34
Element tns:TXAMDL_Type / tns:txalisber	34
Element tns:TXAMDL_Type / tns:txrlisber	35
Element tns:TXAMDL_Type / tns:txelisber	36
Element tns:TXAMDL_Type / tns:txllisber	36
Element tns:TXLLISBER_Type / tns:amAuftragsTyp	37
Element tns:TXLLISBER_Type / tns:berBerechtigung_ID	37
Element tns:TXLLISBER_Type / tns:berSynchronNummer	37
Element tns:TXAMTDL_Type / tns:amListeSender_ID	38
Element tns:TXAMTDL_Type / tns:amListeEmpfaenger_ID	38
Element tns:TXAMTDL_Type / tns:amListeNummer	38
Element tns:TXAMTDL_Type / tns:amListeZeitstempel	39
Element tns:TXAMTDL_Type / tns:amListePruefsumme	39
Element tns:TXAMTDL_Type / tns:txalisber	39
Element tns:TXAMTDL_Type / tns:txrlisber	40
Element tns:TXAMTDL_Type / tns:txelisber	40
Element tns:TXAMTDL_Type / tns:txllisber	41
Element tns:TXAMK_Type / tns:amKonfigurationTyp	41
Element tns:TXAMK_Type / tns:amTerminalGruppe_ID	41
Element tns:TXAMK_Type / tns:amTerminalGruppeBezeichnung	42
Element tns:TXAMK_Type / tns:amTerminalGruppeZusatzinfo	42
Element tns:TXAMK_Type / tns:amTerminalGruppeStatus	42
Element tns:TXAMK_Type / tns:amTerminalGruppeTyp	42
Element tns:TXAMK_Type / tns:prodProdukt_ID	43
Element tns:TXAMK_Type / tns:amTerminal_ID	43
Element tns:TXAMK_Type / tns:amTerminalBezeichnung	43
Element tns:TXAMK_Type / tns:amTerminalZusatzinfo	44
Element tns:TXAMK_Type / tns:amProduktStatus	44
Element tns:TXAMK_Type / tns:amAktLStatus	44
Element tns:TXAMK_Type / tns:amAktDLStatus	44
Element tns:TXAMK_Type / tns:amAktLZeitpunkt	45
Element tns:TXAMK_Type / tns:amAktDLZeitpunkt	45
Element tns:TXAAUFBER	45
Element tns:TXEAUFBER	46
Element tns:TXRAUFBER	46
Element tns:TXAFREIBER	47
Element tns:TXAFREIMITBER	48
Element tns:TXAMK	48
Element tns:TXASAML	50
Element tns:TXASAMTL	50
Element tns:TXASAMDL	51
Element tns:TXASAMTDL	51
Element tns:TXAML	52
Element tns:TXAMTL	53
Element tns:TXAMDL	53
Element tns:TXAMTDL	54
Element tns:TXASAINF	55
Element tns:TXAINF	56
Complex Type(s)	57
Complex Type tns:TerminalGruppe_ID_Type	57
Complex Type tns:TX_IDENTAM_Type	57
Complex Type tns:TXAAUFBER_Type	58
Complex Type tns:TXEAUFBER_Type	59
Complex Type tns:TXRAUFBER_Type	60
Complex Type tns:TXAFREIBER_Type	61
Complex Type tns:TXAFREIMITBER_Type	61
Complex Type tns:TXAINF_Type	62
Complex Type tns:TXASAINF_Type	62
Complex Type tns:TXAML_Type	63
Complex Type tns:TXALISBER_Type	64

Complex Type tns:TXRLISBER_Type	65
Complex Type tns:TXELISBER_Type	66
Complex Type tns:TXAMTL_Type	66
Complex Type tns:TXAMDL_Type	67
Complex Type tns:TXLLISBER_Type	68
Complex Type tns:TXAMTDL_Type	68
Complex Type tns:TXAMK_Type	69
Simple Type(s)	71
Simple Type tns:WertobjektStatus_CODE_Type	71
Namespace: "http://vdv/ka/common/types/2"	71
Schema(s)	71
Imported schema XML-Schema_Common_Types.xsd	71
Simple Type(s)	72
Simple Type tns:ReferenceNumberTwo	72
Simple Type tns:INT2	72
Simple Type tns:INT1	72
Simple Type tns:ReferenceNumberFour	73
Simple Type tns:INT4	73
Simple Type tns:ReferenceNumberOne	74
Simple Type tns:SequenceNumberFour	74
Simple Type tns:DateTime	74
Simple Type tns:BitString16	75
Simple Type tns:DateTimeCompact	75
Simple Type tns:OctetString10	76
Simple Type tns:BitString1	76
Simple Type tns:BitString8	76
Simple Type tns:Date	77
Simple Type tns:DateCompact	77
Simple Type tns:Datetf	77
Simple Type tns:INT3	78
Simple Type tns:OctetString1	78
Simple Type tns:OctetString4	78
Simple Type tns:OctetString8	79
Simple Type tns:OctetString12	79
Simple Type tns:OctetString128	79
Simple Type tns:OctetString200	80
Simple Type tns:ReferenceNumberThree	80
Simple Type tns:SequenceNumberOne	80
Simple Type tns:SequenceNumberTwo	81
Simple Type tns:SequenceNumberThree	81
Namespace: "http://vdv/ka/common/2"	82
Schema(s)	82
Imported schema XML-Schema_KA_Common.xsd	82
Element(s)	82
Element tns:VX	82
Simple Type(s)	82
Simple Type tns:Organisation_ID	82
Simple Type tns:KommunikationsParterRolle	83
Simple Type tns:StatusCode	84
Simple Type tns:StatusText	85
Complex Type(s)	86
Complex Type tns:VX_Message_Type	86
Namespace: "http://vdv/ka/ion/2"	86
Schema(s)	86
Imported schema XML-Schema_ION.xsd	86
Element(s)	86
Element tns:TXB	86
Element tns:TXA	87
Element tns:TXBRequest	88
Element tns:TXARequest	88
Element tns:TXDEABER	89
Element tns:TXSMITA	90
Element tns:TXSFREIMITA	90
Element tns:TXSANFSYMK	91
Element tns:TXSANFASYMK	92
Element tns:TXSAANFSYMK	92
Element tns:TXSAANFASYMK	93
Element tns:TXSFREIMITSYM	94
Element tns:TXSFREIMITASYMK	94
Element tns:TXSMITSYMK	95
Element tns:TXSMITASYMK	96
Element tns:TXSNAWA	96

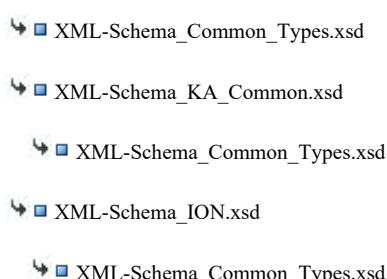
Element tns:TXSNAWB	97
Complex Type(s)	98
Complex Type tns:Terminal_ID_Type	98
Complex Type tns:Berechtigung_ID_Type	98
Complex Type tns:NmApplikationInstanz_ID_Type	99
Complex Type tns:EFMPProdukt_ID_Type	99
Complex Type tns:TX_BASE_Type	99
Complex Type tns:ION_TX_HEADER_Type	100
Complex Type tns:IONTransaktion_ID_Type	101
Complex Type tns:SymSchluessel_ID_Type	101
Complex Type tns:TX_BER_Type	102
Complex Type tns:TXAS_Type	102
Complex Type tns:Ort_ID_Type	103
Complex Type tns:Transaktionsdatensatz_Type	103
Complex Type tns:ASymSchluessel_ID_Type	104
Complex Type tns:appNmTransaktionMAC_Type	104
Complex Type tns:berNmTransaktionMAC_Type	104
Complex Type tns:TX_RET_Type	105
Complex Type tns:TX_SMIT_Type	105
Complex Type tns:TX_SANF_Type	106
Complex Type tns:TXA_Type	107
Complex Type tns:TXB_Type	107
Complex Type tns:TXDEABER_Req_Type	108
Complex Type tns:TXSMITA_Type	109
Complex Type tns:TXSFREIMITA_Type	109
Complex Type tns:TXSANFSYMK_Type	110
Complex Type tns:TXSANFASYMK_Type	110
Complex Type tns:TXSAANFSYMK_Type	111
Complex Type tns:TXSAANFASYMK_Type	112
Complex Type tns:TXSFREIMITSYMK_Type	112
Complex Type tns:TXSFREIMITASYMK_Type	113
Complex Type tns:TXSMITSYMK_Type	113
Complex Type tns:TXSMITASYMK_Type	114
Complex Type tns:TXSNAWA_Req_Type	115
Complex Type tns:TXSNAWB_Req_Type	116
Simple Type(s)	116
Simple Type tns:TerminalTyp_CODE_Type	116
Simple Type tns:TransSignatur_Type	117
Simple Type tns:Abrechnungsverfahren_CODE_Type	117
Simple Type tns:Bezahlart_CODE_Type	118
Simple Type tns:PrintableString	119
Simple Type tns:AuftragsTyp_CODE	119
Simple Type tns:NmTransaktionsTyp_CODE	119
Simple Type tns:CommonServiceresultCode	122
Simple Type tns:OrtsTyp_CODE_Type	123
Simple Type tns:SAM_ID_Type	123
Simple Type tns:Mitteilung_CODE_Type	124
Simple Type tns:SperrlistenZyklusNummer_Type	124
Namespace: ""	125
Element(s)	125
Element tns:Terminal_ID_Type / terminalTyp	125
Element tns:Terminal_ID_Type / terminalNummer	125
Element tns:Terminal_ID_Type / terminalOwner_ID	126
Element tns:Berechtigung_ID_Type / berechtigungNummer	126
Element tns:Berechtigung_ID_Type / kvp_ID	126
Element tns:NmApplikationInstanz_ID_Type / NmAppInstanznummer	127
Element tns:NmApplikationInstanz_ID_Type / kvp_ID	127
Element tns:EFMPProdukt_ID_Type / produktNummer	127
Element tns:EFMPProdukt_ID_Type / organisationID	128
Element tns:TX_BASE_Type / txbase	128
Element tns:ION_TX_HEADER_Type / transAuftrag	129
Element tns:ION_TX_HEADER_Type / transEmpfaenger_ID	129
Element tns:ION_TX_HEADER_Type / transEmpfaengerRolle	129
Element tns:ION_TX_HEADER_Type / transStatus	130
Element tns:ION_TX_HEADER_Type / transTransaktion_ID	130
Element tns:IONTransaktion_ID_Type / transSequenznummer	131
Element tns:IONTransaktion_ID_Type / transSenderRolle	131
Element tns:IONTransaktion_ID_Type / transSender_ID	131
Element tns:ION_TX_HEADER_Type / transTransaktionsTyp	132
Element tns:ION_TX_HEADER_Type / transTransaktionsZeitpunkt	132
Element tns:ION_TX_HEADER_Type / transVersion	132
Element tns:ION_TX_HEADER_Type / transWiederholungsZahler	133

Element tns:ION_TX_HEADER_Type / transSignaturTyp	133
Element tns:ION_TX_HEADER_Type / transSignaturZertifikat	133
Element tns:ION_TX_HEADER_Type / transSignatur	133
Element tns:SymSchluessel_ID_Type / schluesselNummer	134
Element tns:SymSchluessel_ID_Type / schluesselVersion	134
Element tns:SymSchluessel_ID_Type / schluesselInhaber_ID	134
Element tns:TX_BER_Type / berGültigkeitsbeginn	135
Element tns:TX_BER_Type / berGültigkeitsende	135
Element tns:TX_BER_Type / prodAbrechnungsVerfahren	135
Element tns:TX_BER_Type / berBezahlArt	135
Element tns:TX_BER_Type / berBezahlMittel	136
Element tns:TXAS_Type / transSendeAuftrag	136
Element tns:TXAS_Type / transSendeAuftragstyp	136
Element tns:VX_Message_Type / StatusCode	137
Element tns:VX_Message_Type / StatusText	137
Element tns:Ort_ID_Type / ortTyp	138
Element tns:Ort_ID_Type / ortNummer	138
Element tns:Ort_ID_Type / ortDomaene_ID	138
Element tns:Transaktionsdatensatz_Type / Transaktionsdaten	138
Element tns:AsymSchluessel_ID_Type / signaturSchluessel	139
Element tns:appNmTransaktionMAC_Type / appMAC_AH	139
Element tns:appNmTransaktionMAC_Type / appMAC_KVP	139
Element tns:appNmTransaktionMAC_Type / appMAC_AH_Schluessel_ID	139
Element tns:appNmTransaktionMAC_Type / appMAC_KVP_Schluessel_ID	140
Element tns:berNmTransaktionMAC_Type / berMAC_PV	140
Element tns:berNmTransaktionMAC_Type / berMAC_KVP	140
Element tns:berNmTransaktionMAC_Type / berMAC_PV_Schluessel_ID	141
Element tns:berNmTransaktionMAC_Type / berMAC_KVP_Schluessel_ID	141
Element tns:TX_RET_Type / transOrigID	141
Element tns:TX_RET_Type / transOrigSignatur	142
Element tns:TX_RET_Type / transOriginalZeit	142
Element tns:TX_SMIT_Type / sperrAnforderungBezug	142
Element tns:TX_SMIT_Type / sperrEntscheidung	143
Element tns:TX_SANF_Type / sperrSperrgrund	143
Element tns:TXA_Type / transAblehnungGrund	143
Element tns:TXDEABER_Req_Type / prodAkzeptanzEnde	144
Element tns:TXDEABER_Req_Type / prodProdukt_ID	144
Element tns:TXSMITA_Type / appSperrkandidat	144
Element tns:TXSANFSYMK_Type / keySperrkandidatasym	145
Element tns:TXSANFASYMK_Type / keySperrkandidatasym	145
Element tns:TXSFREIMITSYMK_Type / keySperrkandidatasym	145
Element tns:TXSFREIMITASYMK_Type / keySperrkandidatasym	146
Element tns:TXSMITSYMK_Type / keySperrkandidatasym	146
Element tns:TXSMITASYMK_Type / keySperrkandidatasym	146
Element tns:TXSNAWA_Req_Type / samSperrkandidat	147
Element tns:TXSNAWA_Req_Type / orgSperrkandidat	147
Element tns:TXSNAWA_Req_Type / zyklusNummer	147
Element tns:TXSNAWA_Req_Type / sperrtransaktionApplikation	148
Element tns:TXSNAWA_Req_Type / appNmTransaktionMAC	148
Element tns:TXSNAWB_Req_Type / samSperrkandidat	149
Element tns:TXSNAWB_Req_Type / orgSperrkandidat	149
Element tns:TXSNAWB_Req_Type / zyklusNummer	149
Element tns:TXSNAWB_Req_Type / sperrtransaktionBerechtigung	150
Element tns:TXSNAWB_Req_Type / berNmTransaktionMAC	150

Resource hierarchy:

Legend: Import, Include, Redefine, Override, Cycle detected

XML-Schema_ALISE.xsd



↳ XML-Schema_KA_Common.xsd

↳ XML-Schema_Common_Types.xsd

Namespace: "http://vdv/ka/alise/2"

Schema(s)

Main schema XML-Schema_ALISE.xsd

Namespace	http://vdv/ka/alise/2
Annotations	Erweiterung von KVP oder PV System durch ALISE Funktionalitaet. Definition der Nachrichten und Datenstrukturen.
Properties	attribute form default: unqualified element form default: qualified version: 1.11.1
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element(s)

Element tns:TerminalGruppe_ID_Type / tns:terminalGruppenNummer

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class terminalGruppenNummer { <<Type>> } class ct { class ReferenceNumberTwo } terminalGruppenNummer o-- ct::ReferenceNumberTwo </pre>
Type	tns:ReferenceNumberTwo
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo
Properties	content: simple
Facets	maxInclusive 65535 minInclusive 0
Source	<xss:element name="terminalGruppenNummer" type="ct:ReferenceNumberTwo"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TerminalGruppe_ID_Type / tns:pv_ID

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class pv_ID { <<Type>> } class ka { class Organisation_ID } pv_ID o-- ka::Organisation_ID </pre>
Type	tns:Organisation_ID
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID
Properties	content: simple
Facets	maxInclusive 65535 minInclusive 0
Source	<xss:element name="pv_ID" type="ka:Organisation_ID"/>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd
-----------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------

Element tns:TX_IDENTAM_Type / tns:amTerminalGruppe_ID

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram ion::TerminalGruppe_ID_Type { <<Complex Type>> terminalGruppenNummer : ct:ReferenceNumberTwo pv_ID : ka:Organisation_ID } amTerminalGruppe_ID : ion::TerminalGruppe_ID_Type amTerminalGruppe_ID --> ion::TerminalGruppe_ID_Type </pre>
Type	tns:TerminalGruppe_ID_Type
Properties	content: complex
Model	tns:terminalGruppenNummer, tns:pv_ID
Children	tns:pv_ID, tns:terminalGruppenNummer
Instance	<pre> <tns:amTerminalGruppe_ID xmlns:tns="http://vdv/ka/alise/2"> <tns:terminalGruppenNummer>{1,1}</tns:terminalGruppenNummer> <tns:pv_ID>{1,1}</tns:pv_ID> </tns:amTerminalGruppe_ID> </pre>
Source	<xss:element name="amTerminalGruppe_ID" type="tns:TerminalGruppe_ID_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TX_IDENTAM_Type / tns:amTerminal_ID


Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram ion::Terminal_ID_Type { <<Complex Type>> terminalTyp terminalNummer terminalOwner_ID } amTerminal_ID : ion::Terminal_ID_Type amTerminal_ID --> ion::Terminal_ID_Type </pre>
Type	tns:Terminal_ID_Type
Properties	content: complex
Model	terminalTyp, terminalNummer, terminalOwner_ID
Children	terminalNummer, terminalOwner_ID, terminalTyp
Instance	<pre> <tns:amTerminal_ID xmlns:tns="http://vdv/ka/alise/2"> <terminalTyp>{1,1}</terminalTyp> <terminalNummer>{1,1}</terminalNummer> <terminalOwner_ID>{1,1}</terminalOwner_ID> </tns:amTerminal_ID> </pre>
Source	<xss:element name="amTerminal_ID" type="ion:Terminal_ID_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TX_IDENTAM_Type / tns:amAenderungsreferenz_ID


Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram ion::Berechtigung_ID_Type { <<Complex Type>> berechtigungNummer kvp_ID } amAenderungsreferenz_ID : ion::Berechtigung_ID_Type amAenderungsreferenz_ID --> ion::Berechtigung_ID_Type </pre>
Type	tns:Berechtigung_ID_Type
Properties	content: complex

Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<tns:amAenderungsreferenz_ID xmlns:tns="http://vdv/ka/alise/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:amAenderungsreferenz_ID>
Source	<xss:element name="amAenderungsreferenz_ID" type="ion:Berechtigung_ID_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

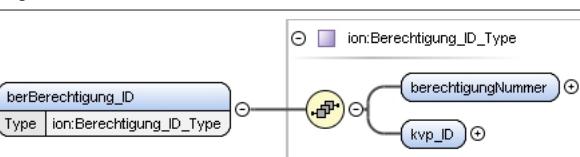
Element tns:TX_IDENTAM_Type / tns:appInstanz_ID

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:NmApplikationInstanz_ID_Type
Properties	content: complex
Model	NmAppInstanznummer , kvp_ID
Children	NmAppInstanznummer, kvp_ID
Instance	<tns:appInstanz_ID xmlns:tns="http://vdv/ka/alise/2"> <NmAppInstanznummer>{1,1}</NmAppInstanznummer> <kvp_ID>{1,1}</kvp_ID> </tns:appInstanz_ID>
Source	<xss:element name="appInstanz_ID" type="ion:NmApplikationInstanz_ID_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TX_IDENTAM_Type / tns:logTransaktionsOperator_ID

Namespace	http://vdv/ka/alise/2				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT2 • tns:ReferenceNumberTwo • tns:Organisation_ID 				
Properties	content: simple				
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<xss:element name="logTransaktionsOperator_ID" type="ka:Organisation_ID" />				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd				

Element tns:TX_IDENTAM_Type / tns:berBerechtigung_ID

Namespace	http://vdv/ka/alise/2
Diagram	

Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/alise/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID>
Source	<xss:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TX_IDENTAM_Type / tns:prodProdukt_ID

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:EFMProdukt_ID_Type
Properties	content: complex
Model	produktNummer{0,1} , organisationID
Children	organisationID, produktNummer
Instance	<tns:prodProdukt_ID xmlns:tns="http://vdv/ka/alise/2"> <produktNummer>{0,1}</produktNummer> <organisationID>{1,1}</organisationID> </tns:prodProdukt_ID>
Source	<xss:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TX_IDENTAM_Type / tns:prodKeyOrganisation_ID


Namespace	http://vdv/ka/alise/2				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT2 • tns:ReferenceNumberTwo • tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<xss:element name="prodKeyOrganisation_ID" type="ka:Organisation_ID" />				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd				

Element tns:TX_IDENTAM_Type / tns:berStatus


Namespace	http://vdv/ka/alise/2
Diagram	

Type	tns:WertobjektStatus_CODE_Type										
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt <ul style="list-style-type: none"> • tns:INT1 • tns:WertobjektStatus_CODE_Type 										
Properties	content: simple										
Facets	<table> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> <tr> <td>enumeration</td> <td>7 ausgegeben/entsperrt (EN 1545-1 o.k. (7))</td> </tr> <tr> <td>enumeration</td> <td>19 gesperrt (EN 1545-1 blocked (19))</td> </tr> <tr> <td>enumeration</td> <td>5 zurueckgenommen (EN 1545-1 canceled (5))</td> </tr> </table>	maxInclusive	255	minInclusive	0	enumeration	7 ausgegeben/entsperrt (EN 1545-1 o.k. (7))	enumeration	19 gesperrt (EN 1545-1 blocked (19))	enumeration	5 zurueckgenommen (EN 1545-1 canceled (5))
maxInclusive	255										
minInclusive	0										
enumeration	7 ausgegeben/entsperrt (EN 1545-1 o.k. (7))										
enumeration	19 gesperrt (EN 1545-1 blocked (19))										
enumeration	5 zurueckgenommen (EN 1545-1 canceled (5))										
Source	<xs:element name="berStatus" type="tns:WertobjektStatus_CODE_Type" />										
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd										


Element tns:TX_IDENTAM_Type / tns:berSynchronNummer

Namespace	http://vdv/ka/alise/2				
Diagram					
Type	tns:ReferenceNumberOne				
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt <ul style="list-style-type: none"> • tns:INT1 • tns:ReferenceNumberOne 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<xs:element name="berSynchronNummer" type="ct:ReferenceNumberOne" />				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd				

Element tns:TXAAUFBER_Type / tns:amAktionGueltigBis

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:DateTime
Properties	content: simple
Source	<xs:element name="amAktionGueltigBis" type="ct:DateTime" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAAUFBER_Type / tns:berInfoText

Namespace	http://vdv/ka/alise/2
Diagram	
Type	xs:string
Properties	content: simple
Source	<xs:element name="berInfoText" type="xs:string" />

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd
-----------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------

Element tns:TXAAUFBER_Type / tns:amMKPV-NM-MAC_ID

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer, schluesselVersion, schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><tns:amMKPV-NM-MAC_ID xmlns:tns="http://vdv/ka/alise/2"> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </tns:amMKPV-NM-MAC_ID></pre>
Source	<xs:element name="amMKPV-NM-MAC_ID" type="ion:SymSchluessel_ID_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAAUFBER_Type / tns:amMKKVP-NM-MAC_ID

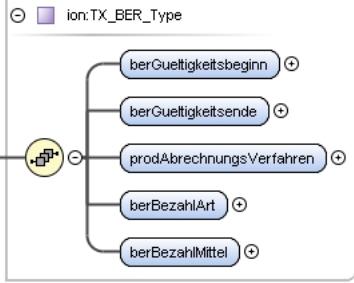
Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer, schluesselVersion, schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><tns:amMKKVP-NM-MAC_ID xmlns:tns="http://vdv/ka/alise/2"> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </tns:amMKKVP-NM-MAC_ID></pre>
Source	<xs:element name="amMKKVP-NM-MAC_ID" type="ion:SymSchluessel_ID_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAAUFBER_Type / tns:amMKERF-NM-MAC_ID

Namespace	http://vdv/ka/alise/2
Diagram	

Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schlüsselNummer , schlüsselVersion , schlüsselInhaber_ID
Children	schlüsselInhaber_ID, schlüsselNummer, schlüsselVersion
Instance	<tns:amMKERF-NM-MAC_ID xmlns:tns="http://vdv/ka/alise/2"> <schlüsselNummer>{1,1}</schlüsselNummer> <schlüsselVersion>{1,1}</schlüsselVersion> <schlüsselInhaber_ID>{1,1}</schlüsselInhaber_ID> </tns:amMKERF-NM-MAC_ID>
Source	<xs:element name="amMKERF-NM-MAC_ID" type="ion:SymSchluessel_ID_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAAUFBER_Type / tns:tx_ber

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:TX_BER_Type
Properties	content: complex
Model	berGueltigkeitsbeginn , berGueltigkeitsende , prodAbrechnungsVerfahren , berBezahlArt , berBezahlMittel
Children	berBezahlArt, berBezahlMittel, berGueltigkeitsbeginn, berGueltigkeitsende, prodAbrechnungsVerfahren
Instance	<tns:tx_ber xmlns:tns="http://vdv/ka/alise/2"> <berGueltigkeitsbeginn>{1,1}</berGueltigkeitsbeginn> <berGueltigkeitsende>{1,1}</berGueltigkeitsende> <prodAbrechnungsVerfahren>{1,1}</prodAbrechnungsVerfahren> <berBezahlArt>{1,1}</berBezahlArt> <berBezahlMittel>{1,1}</berBezahlMittel> </tns:tx_ber>
Source	<xs:element name="tx_ber" type="ion:TX_BER_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAAUFBER_Type / tns:tx_indentam

Namespace	http://vdv/ka/alise/2
-----------	-----------------------


Diagram	
Type	tns:TX_IDENTAM_Type
Properties	content: complex
Model	tns:amTerminalGruppe_ID , tns:amTerminal_ID , tns:amAenderungsreferenz_ID , tns:appInstanz_ID , tns:logTransaktionsOperator_ID , tns:berBerechtigung_ID , tns:prodProdukt_ID , tns:prodKeyOrganisation_ID , tns:berStatus , tns:berSynchronNummer
Children	tns:amAenderungsreferenz_ID, tns:amTerminalGruppe_ID, tns:amTerminal_ID, tns:appInstanz_ID, tns:berBerechtigung_ID, tns:berStatus, tns:berSynchronNummer, tns:logTransaktionsOperator_ID, tns:prodKeyOrganisation_ID, tns:prodProdukt_ID
Instance	<pre><tns:tx_identam xmlns:tns="http://vdv/ka/alise/2"> <tns:amTerminalGruppe_ID>{1,1}</tns:amTerminalGruppe_ID> <tns:amTerminal_ID>{1,1}</tns:amTerminal_ID> <tns:amAenderungsreferenz_ID>{1,1}</tns:amAenderungsreferenz_ID> <tns:appInstanz_ID>{1,1}</tns:appInstanz_ID> <tns:logTransaktionsOperator_ID>{1,1}</tns:logTransaktionsOperator_ID> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> <tns:prodKeyOrganisation_ID>{1,1}</tns:prodKeyOrganisation_ID> <tns:berStatus>{1,1}</tns:berStatus> <tns:berSynchronNummer>{1,1}</tns:berSynchronNummer> </tns:tx_identam></pre>
Source	<xss:element name="tx_identam" type="tns:TX_IDENTAM_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAAUFBER_Type / tns:berProduktspezTeil


Namespace	http://vdv/ka/alise/2
Diagram	
Type	xs:hexBinary
Properties	content: simple
Source	<xss:element name="berProduktspezTeil" type="xs:hexBinary" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAAUFBER_Type / tns:ZusatzdatenTarifbereich

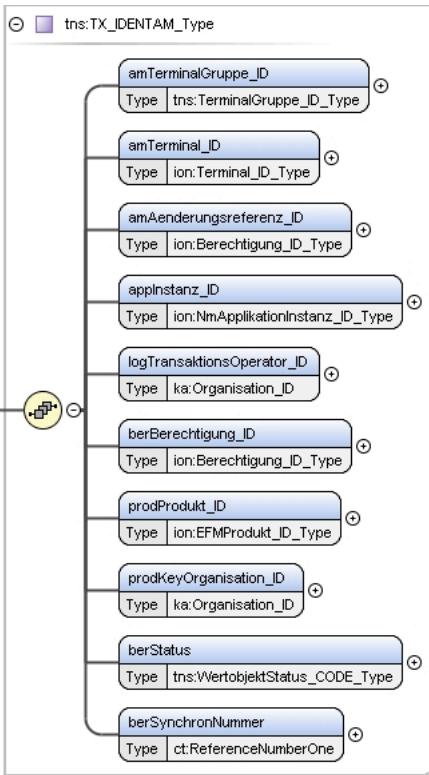
Namespace	http://vdv/ka/alise/2
-----------	-----------------------

Diagram	
Type	xs:hexBinary
Properties	content: simple
Source	<xs:element name="ZusatzdatenTarifbereich" type="xs:hexBinary" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXEAUFBER_Type / tns:amAktionGueltigBis


Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:DateTime
Properties	content: simple
Source	<xs:element name="amAktionGueltigBis" type="ct:DateTime" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXEAUFBER_Type / tns:tx_identam

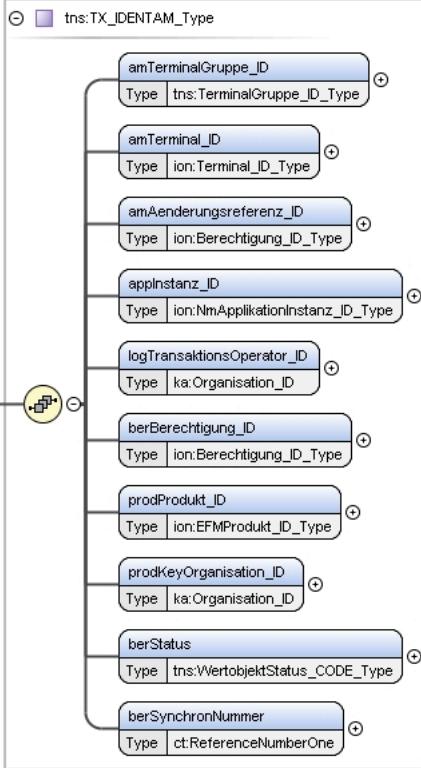
Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:TX_IDENTAM_Type
Properties	content: complex
Model	tns:amTerminalGruppe_ID , tns:amTerminal_ID , tns:amAenderungsreferenz_ID , tns:appInstanz_ID , tns:logTransaktionsOperator_ID , tns:berBerechtigung_ID , tns:prodProdukt_ID , tns:prodKeyOrganisation_ID , tns:berStatus , tns:berSynchronNummer
Children	tns:amAenderungsreferenz_ID, tns:amTerminalGruppe_ID, tns:amTerminal_ID, tns:appInstanz_ID, tns:berBerechtigung_ID, tns:berStatus, tns:berSynchronNummer, tns:logTransaktionsOperator_ID, tns:prodKeyOrganisation_ID, tns:prodProdukt_ID
Instance	<pre> <tns:tx_identam xmlns:tns="http://vdv/ka/alise/2"> <tns:amTerminalGruppe_ID>{1,1}</tns:amTerminalGruppe_ID> <tns:amTerminal_ID>{1,1}</tns:amTerminal_ID> <tns:amAenderungsreferenz_ID>{1,1}</tns:amAenderungsreferenz_ID> </pre>

	<pre><tns:appInstanz_ID>{1,1}</tns:appInstanz_ID> <tns:logTransaktionsOperator_ID>{1,1}</tns:logTransaktionsOperator_ID> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> <tns:prodKeyOrganisation_ID>{1,1}</tns:prodKeyOrganisation_ID> <tns:berStatus>{1,1}</tns:berStatus> <tns:berSynchronNummer>{1,1}</tns:berSynchronNummer> </tns:tx_identam></pre>
Source	<code><xss:element name="tx_identam" type="tns:TX_IDENTAM_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXRAUFBER_Type / tns:amAktionGueltigBis

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:DateTime
Properties	content: simple
Source	<code><xss:element name="amAktionGueltigBis" type="ct:DateTime" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXRAUFBER_Type / tns:tx_identam

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:TX_IDENTAM_Type
Properties	content: complex
Model	tns:amTerminalGruppe_ID , tns:amTerminal_ID , tns:amAenderungsreferenz_ID , tns:appInstanz_ID , tns:logTransaktionsOperator_ID , tns:berBerechtigung_ID , tns:prodProdukt_ID , tns:prodKeyOrganisation_ID , tns:berStatus , tns:berSynchronNummer
Children	tns:amAenderungsreferenz_ID, tns:amTerminalGruppe_ID, tns:amTerminal_ID, tns:appInstanz_ID, tns:berBerechtigung_ID, tns:berStatus, tns:berSynchronNummer, tns:logTransaktionsOperator_ID, tns:prodKeyOrganisation_ID, tns:prodProdukt_ID
Instance	<code><tns:tx_identam xmlns:tns="http://vdv/ka/alise/2"> <tns:amTerminalGruppe_ID>{1,1}</tns:amTerminalGruppe_ID> <tns:amTerminal_ID>{1,1}</tns:amTerminal_ID></code>

	<pre><tns:amAenderungsreferenz_ID>{1,1}</tns:amAenderungsreferenz_ID> <tns:appInstanz_ID>{1,1}</tns:appInstanz_ID> <tns:logTransaktionsOperator_ID>{1,1}</tns:logTransaktionsOperator_ID> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> <tns:prodKeyOrganisation_ID>{1,1}</tns:prodKeyOrganisation_ID> <tns:berStatus>{1,1}</tns:berStatus> <tns:berSyncronNummer>{1,1}</tns:berSyncronNummer> </tns:tx_identam></pre>
Source	<xss:element name="tx_identam" type="tns:TX_IDENTAM_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAFREIBER_Type / tns:berBerechtigung_ID

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class berBerechtigung_ID { Type } class ionBerechtigung_ID_Type { berBerechtigung_ID } class berechtigungNummer class kvp_ID berBerechtigung_ID "0..1" -- "*" ionBerechtigung_ID_Type ionBerechtigung_ID_Type "1..2" -- "+" berechtigungNummer ionBerechtigung_ID_Type "1..2" -- "+" kvp_ID </pre>
Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/alise/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></pre>
Source	<xss:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAFREIBER_Type / tns:berSyncronNummer


Namespace	http://vdv/ka/alise/2				
Diagram	<pre> classDiagram class berSyncronNummer { Type } class ctReferenceNumberOne { berSyncronNummer } berSyncronNummer "0..1" -- "*" ctReferenceNumberOne ctReferenceNumberOne "1..2" -- "+" berSyncronNummer </pre>				
Type	tns:ReferenceNumberOne				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 tns:ReferenceNumberOne 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<xss:element name="berSyncronNummer" type="ct:ReferenceNumberOne" />				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd				

Element tns:TXAFREIMITBER_Type / tns:berBerechtigung_ID


Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class berBerechtigung_ID { Type } class ionBerechtigung_ID_Type { berBerechtigung_ID } class berechtigungNummer class kvp_ID berBerechtigung_ID "0..1" -- "*" ionBerechtigung_ID_Type ionBerechtigung_ID_Type "1..2" -- "+" berechtigungNummer ionBerechtigung_ID_Type "1..2" -- "+" kvp_ID </pre>
Type	tns:Berechtigung_ID_Type

Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/alise/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></pre>
Source	<code><xss:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd


Element tns:TXAFREIMITBER_Type / tns:berSynchronNummer

Namespace	http://vdv/ka/alise/2				
Diagram					
Type	tns:ReferenceNumberOne				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:ReferenceNumberOne 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<code><xss:element name="berSynchronNummer" type="ct:ReferenceNumberOne"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd				

Element tns:TXAINF_Type / tns:transMediennummer


Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:OctetString10
Properties	content: simple
Facets	length 10
Source	<code><xss:element name="transMediennummer" type="ct:OctetString10"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAINF_Type / tns:transAppInstanz_ID


Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:NmApplikationInstanz_ID_Type
Properties	content: complex
Model	NmApplinstanznummer , kvp_ID
Children	NmApplinstanznummer, kvp_ID
Instance	<pre><tns:transAppInstanz_ID xmlns:tns="http://vdv/ka/alise/2"> <NmApplinstanznummer>{1,1}</NmApplinstanznummer> <kvp_ID>{1,1}</kvp_ID></pre>

	</tns:transAppInstanz_ID>
Source	<xss:element name="transAppInstanz_ID" type="ion:NmApplikationInstanz_ID_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd


Element tns:TXAINF_Type / tns:transAppGueltigkeitsende

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:DateTime
Properties	content: simple
Source	<xss:element name="transAppGueltigkeitsende" type="ct:DateTime" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXASAINF_Type / tns:transMediennummer

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:OctetString10
Properties	content: simple nillable: true
Facets	length 10
Source	<xss:element name="transMediennummer" type="ct:OctetString10" nillable="true" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXASAINF_Type / tns:transAppInstanz_ID

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:NmApplikationInstanz_ID_Type
Properties	content: complex nillable: true
Model	NmAppInstanznummer , kvp_ID
Children	NmAppInstanznummer, kvp_ID
Instance	<tns:transAppInstanz_ID xmlns:tns="http://vdv/ka/alise/2"> <NmAppInstanznummer>{1,1}</NmAppInstanznummer> <kvp_ID>{1,1}</kvp_ID> </tns:transAppInstanz_ID>
Source	<xss:element name="transAppInstanz_ID" type="ion:NmApplikationInstanz_ID_Type" nillable="true" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAML_Type / tns:amListeSender_ID

Namespace	http://vdv/ka/alise/2
Diagram	

Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT2 • tns:ReferenceNumberTwo • tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<xs:element name="amListeSender_ID" type="ka:Organisation_ID"/>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd				

Element tns:TXAML_Type / tns:amListeEmpfaenger_ID


Namespace	http://vdv/ka/alise/2				
Diagram	<pre> classDiagram class amListeEmpfaenger_ID { <<Type>> } class ka:Organisation_ID { <<ka:Organisation_ID>> } amListeEmpfaenger_ID "0..1" o-- "1..1" ka:Organisation_ID </pre>				
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT2 • tns:ReferenceNumberTwo • tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<xs:element name="amListeEmpfaenger_ID" type="ka:Organisation_ID"/>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd				

Element tns:TXAML_Type / tns:amListeNummer

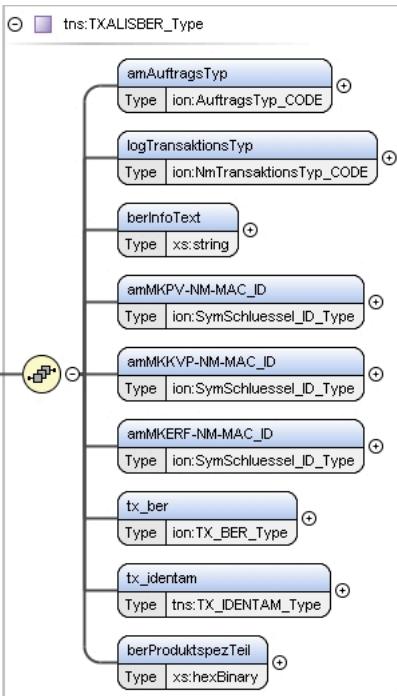
Namespace	http://vdv/ka/alise/2				
Diagram	<pre> classDiagram class amListeNummer { <<Type>> } class ct:ReferenceNumberFour { <<ct:ReferenceNumberFour>> } amListeNummer "0..1" o-- "1..1" ct:ReferenceNumberFour </pre>				
Type	tns:ReferenceNumberFour				
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT4 • tns:ReferenceNumberFour 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>4294967295</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Source	<xs:element name="amListeNummer" type="ct:ReferenceNumberFour"/>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd				

Element tns:TXAML_Type / tns:amListeZeitstempel


Namespace	http://vdv/ka/alise/2
-----------	-----------------------

Diagram	
Type	tns:DateTime
Properties	content: simple
Source	<xs:element name="amListeZeitstempel" type="ct:DateTime"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAML_Type / tns:txalisber

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:TXALISBER_Type
Properties	content: complex
Model	tns:amAuftragsTyp , tns:logTransaktionsTyp , tns:berInfoText , tns:amMKPV-NM-MAC_ID , tns:amMKKVP-NM-MAC_ID , tns:amMKERF-NM-MAC_ID , tns:tx_ber , tns:tx_identam , tns:berProduktspezTeil
Children	tns:amAuftragsTyp, tns:amMKERF-NM-MAC_ID, tns:amMKKVP-NM-MAC_ID, tns:amMKPV-NM-MAC_ID, tns:berInfoText, tns:berProduktspezTeil, tns:logTransaktionsTyp, tns:tx_ber, tns:tx_identam
Instance	<tns:txalisber xmlns:tns="http://vdv/ka/alise/2"> <tns:amAuftragsTyp>{1,1}</tns:amAuftragsTyp> <tns:logTransaktionsTyp>{1,1}</tns:logTransaktionsTyp> <tns:berInfoText>{1,1}</tns:berInfoText> <tns:amMKPV-NM-MAC_ID>{1,1}</tns:amMKPV-NM-MAC_ID> <tns:amMKKVP-NM-MAC_ID>{1,1}</tns:amMKKVP-NM-MAC_ID> <tns:amMKERF-NM-MAC_ID>{1,1}</tns:amMKERF-NM-MAC_ID> <tns:tx_ber>{1,1}</tns:tx_ber> <tns:tx_identam>{1,1}</tns:tx_identam> <tns:berProduktspezTeil>{1,1}</tns:berProduktspezTeil> </tns:txalisber>
Source	<xs:element name="txalisber" type="tns:TXALISBER_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXALISBER_Type / tns:amAuftragsTyp

Namespace	http://vdv/ka/alise/2
Diagram	


Type	tns:AuftragsTyp_CODE						
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt <ul style="list-style-type: none"> • tns:INT1 • tns:AuftragsTyp_CODE 						
Properties	content: simple						
Facets	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">maxInclusive</td> <td style="width: 15%;">255</td> <td></td> </tr> <tr> <td>minInclusive</td> <td>0</td> <td></td> </tr> </table>	maxInclusive	255		minInclusive	0	
maxInclusive	255						
minInclusive	0						
Source	<xss:element name="amAuftragsTyp" type="ion:AuftragsTyp_CODE"/>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd						

Element tns:TXALISBER_Type / tns:logTransaktionsTyp

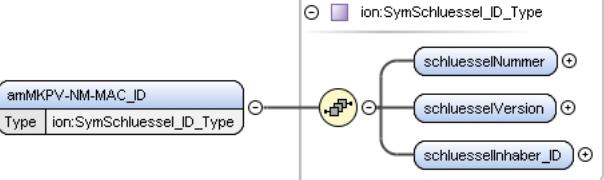
Namespace	http://vdv/ka/alise/2																																																																											
Diagram	<pre> classDiagram class logTransaktionsTyp { <<Type>> <<ion:NmTransaktionsTyp_CODE>> } class ion:NmTransaktionsTyp_CODE { <<Type>> } logTransaktionsTyp "0..1" o-- "1..1" ion:NmTransaktionsTyp_CODE </pre>																																																																											
Type	tns:NmTransaktionsTyp_CODE																																																																											
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt <ul style="list-style-type: none"> • tns:INT1 • tns:NmTransaktionsTyp_CODE 																																																																											
Properties	content: simple																																																																											
Facets	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">maxInclusive</td> <td style="width: 15%;">255</td> <td></td> </tr> <tr> <td>minInclusive</td> <td>0</td> <td></td> </tr> <tr> <td>enumeration</td> <td>0</td> <td>Keine Angabe</td> </tr> <tr> <td>enumeration</td> <td>1</td> <td>Ausgabetransaktion - Applikation oder Berechtigung</td> </tr> <tr> <td>enumeration</td> <td>2</td> <td>Entwertung</td> </tr> <tr> <td>enumeration</td> <td>11</td> <td>CI</td> </tr> <tr> <td>enumeration</td> <td>12</td> <td>CO</td> </tr> <tr> <td>enumeration</td> <td>15</td> <td>Einzahlung - Berechtigung</td> </tr> <tr> <td>enumeration</td> <td>16</td> <td>CI nach Fahrtfortsetzung</td> </tr> <tr> <td>enumeration</td> <td>18</td> <td>NTP Aendern</td> </tr> <tr> <td>enumeration</td> <td>20</td> <td>Sperrtransaktion Applikation oder Berechtigung</td> </tr> <tr> <td>enumeration</td> <td>21</td> <td>Entsperrtransaktion Applikation oder Berechtigung</td> </tr> <tr> <td>enumeration</td> <td>22</td> <td>BI</td> </tr> <tr> <td>enumeration</td> <td>23</td> <td>BO</td> </tr> <tr> <td>enumeration</td> <td>24</td> <td>INOUT</td> </tr> <tr> <td>enumeration</td> <td>25</td> <td>Rueckgabetransaktion - Applikation oder Berechtigung</td> </tr> <tr> <td>enumeration</td> <td>27</td> <td>Kontrolle</td> </tr> <tr> <td>enumeration</td> <td>28</td> <td>Belastungstransactions - Berechtigung und Gutschriften bei Rueckzahlung (POB/PEB/WEB)</td> </tr> <tr> <td>enumeration</td> <td>29</td> <td>Belastungstransactions WEB mit Autoload</td> </tr> <tr> <td>enumeration</td> <td>30</td> <td>WEB Buchung(Laden/Entladen)</td> </tr> <tr> <td>enumeration</td> <td>31</td> <td>WEB-CI mit Autoload</td> </tr> <tr> <td>enumeration</td> <td>32</td> <td>WEB-CO mit Autoload</td> </tr> <tr> <td>enumeration</td> <td>33</td> <td>Kontrolle nach CI; BIBO oder Entwertung</td> </tr> <tr> <td>enumeration</td> <td>34</td> <td>Check personal (CPKontrolldatensatz fuer Kontrollterminal)</td> </tr> <tr> <td>enumeration</td> <td>35</td> <td>Auto CO</td> </tr> </table>	maxInclusive	255		minInclusive	0		enumeration	0	Keine Angabe	enumeration	1	Ausgabetransaktion - Applikation oder Berechtigung	enumeration	2	Entwertung	enumeration	11	CI	enumeration	12	CO	enumeration	15	Einzahlung - Berechtigung	enumeration	16	CI nach Fahrtfortsetzung	enumeration	18	NTP Aendern	enumeration	20	Sperrtransaktion Applikation oder Berechtigung	enumeration	21	Entsperrtransaktion Applikation oder Berechtigung	enumeration	22	BI	enumeration	23	BO	enumeration	24	INOUT	enumeration	25	Rueckgabetransaktion - Applikation oder Berechtigung	enumeration	27	Kontrolle	enumeration	28	Belastungstransactions - Berechtigung und Gutschriften bei Rueckzahlung (POB/PEB/WEB)	enumeration	29	Belastungstransactions WEB mit Autoload	enumeration	30	WEB Buchung(Laden/Entladen)	enumeration	31	WEB-CI mit Autoload	enumeration	32	WEB-CO mit Autoload	enumeration	33	Kontrolle nach CI; BIBO oder Entwertung	enumeration	34	Check personal (CPKontrolldatensatz fuer Kontrollterminal)	enumeration	35	Auto CO
maxInclusive	255																																																																											
minInclusive	0																																																																											
enumeration	0	Keine Angabe																																																																										
enumeration	1	Ausgabetransaktion - Applikation oder Berechtigung																																																																										
enumeration	2	Entwertung																																																																										
enumeration	11	CI																																																																										
enumeration	12	CO																																																																										
enumeration	15	Einzahlung - Berechtigung																																																																										
enumeration	16	CI nach Fahrtfortsetzung																																																																										
enumeration	18	NTP Aendern																																																																										
enumeration	20	Sperrtransaktion Applikation oder Berechtigung																																																																										
enumeration	21	Entsperrtransaktion Applikation oder Berechtigung																																																																										
enumeration	22	BI																																																																										
enumeration	23	BO																																																																										
enumeration	24	INOUT																																																																										
enumeration	25	Rueckgabetransaktion - Applikation oder Berechtigung																																																																										
enumeration	27	Kontrolle																																																																										
enumeration	28	Belastungstransactions - Berechtigung und Gutschriften bei Rueckzahlung (POB/PEB/WEB)																																																																										
enumeration	29	Belastungstransactions WEB mit Autoload																																																																										
enumeration	30	WEB Buchung(Laden/Entladen)																																																																										
enumeration	31	WEB-CI mit Autoload																																																																										
enumeration	32	WEB-CO mit Autoload																																																																										
enumeration	33	Kontrolle nach CI; BIBO oder Entwertung																																																																										
enumeration	34	Check personal (CPKontrolldatensatz fuer Kontrollterminal)																																																																										
enumeration	35	Auto CO																																																																										

	enumeration	36	manuelles CO (nachtraeglich durch den Nutzer)
	enumeration	37	Ausgabe EFS ueber Aktionsliste
	enumeration	38	Entsperrtransaktion EFS ueber Aktionsliste
	enumeration	39	Rückgabetransaktion EFS ueber Aktionsliste
Source	<xs:element name="logTransaktionsTyp" type="ion:NmTransaktionsTyp_CODE"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd		

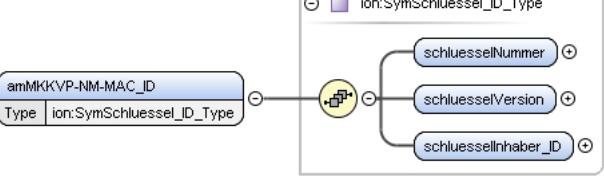
Element tns:TXALISBER_Type / tns:berInfoText

Namespace	http://vdv/ka/alise/2
Diagram	
Type	xs:string
Properties	content: simple
Source	<xs:element name="berInfoText" type="xs:string"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXALISBER_Type / tns:amMKPV-NM-MAC_ID

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:SymSchlussel_ID_Type
Properties	content: complex
Model	schlüsselNummer , schlüsselVersion , schlüsselInhaber_ID
Children	schlüsselInhaber_ID, schlüsselNummer, schlüsselVersion
Instance	<tns:amMKPV-NM-MAC_ID xmlns:tns="http://vdv/ka/alise/2"> <schlüsselNummer>{1,1}</schlüsselNummer> <schlüsselVersion>{1,1}</schlüsselVersion> <schlüsselInhaber_ID>{1,1}</schlüsselInhaber_ID> </tns:amMKPV-NM-MAC_ID>
Source	<xs:element name="amMKPV-NM-MAC_ID" type="ion:SymSchlussel_ID_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXALISBER_Type / tns:amMKKVP-NM-MAC_ID

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:SymSchlussel_ID_Type
Properties	content: complex
Model	schlüsselNummer , schlüsselVersion , schlüsselInhaber_ID

Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><tns:amMKVP-NM-MAC_ID xmlns:tns="http://vdv/ka/alise/2"> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </tns:amMKVP-NM-MAC_ID></pre>
Source	<code><xs:element name="amMKVP-NM-MAC_ID" type="ion:SymSchluessel_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXALISBER_Type / tns:amMKERF-NM-MAC_ID

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class amMKERF-NM-MAC_ID { <<Type ion:SymSchluessel_ID_Type>> } class ion:SymSchluessel_ID_Type { <<ion:SymSchluessel_ID_Type>> <<schluesselNummer>> <<schluesselVersion>> <<schluesselInhaber_ID>> } amMKERF-NM-MAC_ID < -- ion:SymSchluessel_ID_Type </pre>
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer, schluesselVersion, schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><tns:amMKERF-NM-MAC_ID xmlns:tns="http://vdv/ka/alise/2"> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </tns:amMKERF-NM-MAC_ID></pre>
Source	<code><xs:element name="amMKERF-NM-MAC_ID" type="ion:SymSchluessel_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXALISBER_Type / tns:tx_ber

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class tx_ber { <<Type ion:TX_BER_Type>> } class ion:TX_BER_Type { <<ion:TX_BER_Type>> <<berGueltigkeitsbeginn>> <<berGueltigkeitsende>> <<prodAbrechnungsVerfahren>> <<berBezahlArt>> <<berBezahlMittel>> } tx_ber < -- ion:TX_BER_Type </pre>
Type	tns:TX_BER_Type
Properties	content: complex
Model	berGueltigkeitsbeginn, berGueltigkeitsende, prodAbrechnungsVerfahren, berBezahlArt, berBezahlMittel
Children	berBezahlArt, berBezahlMittel, berGueltigkeitsbeginn, berGueltigkeitsende, prodAbrechnungsVerfahren
Instance	<pre><tns:tx_ber xmlns:tns="http://vdv/ka/alise/2"> <berGueltigkeitsbeginn>{1,1}</berGueltigkeitsbeginn> <berGueltigkeitsende>{1,1}</berGueltigkeitsende> <prodAbrechnungsVerfahren>{1,1}</prodAbrechnungsVerfahren> <berBezahlArt>{1,1}</berBezahlArt> <berBezahlMittel>{1,1}</berBezahlMittel> </tns:tx_ber></pre>
Source	<code><xs:element name="tx_ber" type="ion:TX_BER_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXALISBER_Type / tns:tx_identam

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class tns:TX_IDENTAM_Type { amTerminalGruppe_ID : tns:TerminalGruppe_ID_Type amTerminal_ID : ion:Terminal_ID_Type amAenderungsreferenz_ID : ion:Berechtigung_ID_Type appInstanz_ID : ion:NmApplikationInstanz_ID_Type logTransaktionsOperator_ID : ka:Organisation_ID berBerechtigung_ID : ion:Berechtigung_ID_Type prodProdukt_ID : ion:EFMProdukt_ID_Type prodKeyOrganisation_ID : ka:Organisation_ID berStatus : tns:WertobjektStatus_CODE_Type berSynchronNummer : ct:ReferenceNumberOne } tx_identam < -- tns:TX_IDENTAM_Type </pre>
Type	tns:TX_IDENTAM_Type
Properties	content: complex
Model	tns:amTerminalGruppe_ID , tns:amTerminal_ID , tns:amAenderungsreferenz_ID , tns:appInstanz_ID , tns:logTransaktionsOperator_ID , tns:berBerechtigung_ID , tns:prodProdukt_ID , tns:prodKeyOrganisation_ID , tns:berStatus , tns:berSynchronNummer
Children	tns:amAenderungsreferenz_ID, tns:amTerminalGruppe_ID, tns:amTerminal_ID, tns:appInstanz_ID, tns:logTransaktionsOperator_ID, tns:berBerechtigung_ID, tns:berStatus, tns:berSynchronNummer, tns:prodProdukt_ID
Instance	<pre> <tns:tx_identam xmlns:tns="http://vdv/ka/alise/2"> <tns:amTerminalGruppe_ID>{1,1}</tns:amTerminalGruppe_ID> <tns:amTerminal_ID>{1,1}</tns:amTerminal_ID> <tns:amAenderungsreferenz_ID>{1,1}</tns:amAenderungsreferenz_ID> <tns:appInstanz_ID>{1,1}</tns:appInstanz_ID> <tns:logTransaktionsOperator_ID>{1,1}</tns:logTransaktionsOperator_ID> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> <tns:prodKeyOrganisation_ID>{1,1}</tns:prodKeyOrganisation_ID> <tns:berStatus>{1,1}</tns:berStatus> <tns:berSynchronNummer>{1,1}</tns:berSynchronNummer> </tns:tx_identam> </pre>
Source	<xss:element name="tx_identam" type="tns:TX_IDENTAM_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXALISBER_Type / tns:berProduktspezTeil

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class tns:berProduktspezTeil { Type xs:hexBinary } xs:hexBinary < -- tns:berProduktspezTeil </pre>
Type	xs:hexBinary
Properties	content: simple
Source	<xss:element name="berProduktspezTeil" type="xs:hexBinary" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXRML_Type / tns:txrlisber

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class txrlisber { <<Type tns:TXRLISBER_Type>> } class amAuftragsTyp { <<Type ion:AuftragsTyp_CODE>> } class logTransaktionsTyp { <<Type ion:NmTransaktionsTyp_CODE>> } class tx_identam { <<Type tns:TX_IDENTAM_Type>> } txrlisber < -- amAuftragsTyp txrlisber < -- logTransaktionsTyp txrlisber < -- tx_identam </pre>
Type	tns:TXRLISBER_Type
Properties	content: complex
Model	tns:amAuftragsTyp , tns:logTransaktionsTyp , tns:tx_identam
Children	tns:amAuftragsTyp, tns:logTransaktionsTyp, tns:tx_identam
Instance	<tns:txrlisber xmlns:tns="http://vdv/ka/alise/2"> <tns:amAuftragsTyp>{1,1}</tns:amAuftragsTyp> <tns:logTransaktionsTyp>{1,1}</tns:logTransaktionsTyp> <tns:tx_identam>{1,1}</tns:tx_identam> </tns:txrlisber>
Source	<xss:element name="txrlisber" type="tns:TXRLISBER_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXRLISBER_Type / tns:amAuftragsTyp

Namespace	http://vdv/ka/alise/2				
Diagram	<pre> classDiagram class amAuftragsTyp { <<Type ion:AuftragsTyp_CODE>> } class ionAuftragsTyp_CODE { <<Type ion:AuftragsTyp_CODE>> } amAuftragsTyp < -- ionAuftragsTyp_CODE </pre>				
Type	tns:AuftragsTyp_CODE				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tts:INT1 tns:AuftragsTyp_CODE 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<xss:element name="amAuftragsTyp" type="ion:AuftragsTyp_CODE" />				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd				

Element tns:TXRLISBER_Type / tns:logTransaktionsTyp

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class logTransaktionsTyp { <<Type ion:NmTransaktionsTyp_CODE>> } class ionNmTransaktionsTyp_CODE { <<Type ion:NmTransaktionsTyp_CODE>> } logTransaktionsTyp < -- ionNmTransaktionsTyp_CODE </pre>
Type	tns:NmTransaktionsTyp_CODE
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tts:INT1 tns:NmTransaktionsTyp_CODE
Properties	content: simple
Facets	maxInclusive 255

minInclusive	0	
enumeration	0	Keine Angabe
enumeration	1	Ausgabetransaktion - Applikation oder Berechtigung
enumeration	2	Entwertung
enumeration	11	CI
enumeration	12	CO
enumeration	15	Einzahlung - Berechtigung
enumeration	16	CI nach Fahrtfortsetzung
enumeration	18	NTP Aendern
enumeration	20	Sperrtransaktion Applikation oder Berechtigung
enumeration	21	Entsperrtransaktion Applikation oder Berechtigung
enumeration	22	BI
enumeration	23	BO
enumeration	24	INOUT
enumeration	25	Rueckgabetransaktion - Applikation oder Berechtigung
enumeration	27	Kontrolle
enumeration	28	Belastungstransaktion - Berechtigung und Gutschriften bei Rueckzahlung (POB/PEB/WEB)
enumeration	29	Belastungstransaktion WEB mit Autoload
enumeration	30	WEB Buchung(Laden/Entladen)
enumeration	31	WEB-CI mit Autoload
enumeration	32	WEB-CO mit Autoload
enumeration	33	Kontrolle nach CI; BIBO oder Entwertung
enumeration	34	Check personal (CPKontrolldatensatz fuer Kontrollterminal)
enumeration	35	Auto CO
enumeration	36	manuelles CO (nachtraeglich durch den Nutzer)
enumeration	37	Ausgabe EFS ueber Aktionsliste
enumeration	38	Entsperrtransaktion EFS ueber Aktionsliste
enumeration	39	Rückgabetransaktion EFS ueber Aktionsliste
Source	<xs:element name="logTransaktionsTyp" type="ion:NmTransaktionsTyp_CODE"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd	

Element **tns:TXRLISBER_Type / tns:tx_indentam**

Namespace	http://vdv/ka/alise/2
-----------	-----------------------

Diagram	
Type	tns:TX_IDENTAM_Type
Properties	content: complex
Model	tns:amTerminalGruppe_ID , tns:amTerminal_ID , tns:amAenderungsreferenz_ID , tns:appInstanz_ID , tns:logTransaktionsOperator_ID , tns:berBerechtigung_ID , tns:prodProdukt_ID , tns:prodKeyOrganisation_ID , tns:berStatus , tns:berSynchronNummer
Children	tns:amAenderungsreferenz_ID, tns:amTerminalGruppe_ID, tns:amTerminal_ID, tns:appInstanz_ID, tns:berBerechtigung_ID, tns:berStatus, tns:berSynchronNummer, tns:logTransaktionsOperator_ID, tns:prodKeyOrganisation_ID, tns:prodProdukt_ID
Instance	<pre><tns:tx_identam xmlns:tns="http://vdv/ka/alise/2"> <tns:amTerminalGruppe_ID>{1,1}</tns:amTerminalGruppe_ID> <tns:amTerminal_ID>{1,1}</tns:amTerminal_ID> <tns:amAenderungsreferenz_ID>{1,1}</tns:amAenderungsreferenz_ID> <tns:appInstanz_ID>{1,1}</tns:appInstanz_ID> <tns:logTransaktionsOperator_ID>{1,1}</tns:logTransaktionsOperator_ID> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> <tns:prodKeyOrganisation_ID>{1,1}</tns:prodKeyOrganisation_ID> <tns:berStatus>{1,1}</tns:berStatus> <tns:berSynchronNummer>{1,1}</tns:berSynchronNummer> </tns:tx_identam></pre>
Source	<xss:element name="tx_identam" type="tns:TX_IDENTAM_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAML_Type / tns:txelisber

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:TXELISBER_Type

Properties	content: complex
Model	tns:amAuftragsTyp , tns:logTransaktionsTyp , tns:tx_identam
Children	tns:amAuftragsTyp, tns:logTransaktionsTyp, tns:tx_identam
Instance	<pre><tns:txelisber xmlns:tns="http://vdv/ka/alise/2"> <tns:amAuftragsTyp>{1,1}</tns:amAuftragsTyp> <tns:logTransaktionsTyp>{1,1}</tns:logTransaktionsTyp> <tns:tx_identam>{1,1}</tns:tx_identam> </tns:txelisber></pre>
Source	<code><xss:element name="txelisber" type="tns:TXELISBER_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXELISBER_Type / tns:amAuftragsTyp

Namespace	http://vdv/ka/alise/2				
Diagram					
Type	tns:AuftragsTyp_CODE				
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt <ul style="list-style-type: none"> • tns:INT1 • tns:AuftragsTyp_CODE 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<code><xss:element name="amAuftragsTyp" type="ion:AuftragsTyp_CODE"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd				

Element tns:TXELISBER_Type / tns:logTransaktionsTyp

Namespace	http://vdv/ka/alise/2																																		
Diagram																																			
Type	tns:NmTransaktionsTyp_CODE																																		
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt <ul style="list-style-type: none"> • tns:INT1 • tns:NmTransaktionsTyp_CODE 																																		
Properties	content: simple																																		
Facets	<table> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> <tr> <td>enumeration</td> <td>0</td> <td>Keine Angabe</td> </tr> <tr> <td>enumeration</td> <td>1</td> <td>Ausgabetransaktion - Applikation oder Berechtigung</td> </tr> <tr> <td>enumeration</td> <td>2</td> <td>Entwertung</td> </tr> <tr> <td>enumeration</td> <td>11</td> <td>CI</td> </tr> <tr> <td>enumeration</td> <td>12</td> <td>CO</td> </tr> <tr> <td>enumeration</td> <td>15</td> <td>Einzahlung - Berechtigung</td> </tr> <tr> <td>enumeration</td> <td>16</td> <td>CI nach Fahrtfortsetzung</td> </tr> <tr> <td>enumeration</td> <td>18</td> <td>NTP Aendern</td> </tr> <tr> <td>enumeration</td> <td>20</td> <td>Sperrtransaktion Applikation oder Berechtigung</td> </tr> <tr> <td>enumeration</td> <td>21</td> <td>Entsperrtransaktion Applikation oder Berechtigung</td> </tr> </table>	maxInclusive	255	minInclusive	0	enumeration	0	Keine Angabe	enumeration	1	Ausgabetransaktion - Applikation oder Berechtigung	enumeration	2	Entwertung	enumeration	11	CI	enumeration	12	CO	enumeration	15	Einzahlung - Berechtigung	enumeration	16	CI nach Fahrtfortsetzung	enumeration	18	NTP Aendern	enumeration	20	Sperrtransaktion Applikation oder Berechtigung	enumeration	21	Entsperrtransaktion Applikation oder Berechtigung
maxInclusive	255																																		
minInclusive	0																																		
enumeration	0	Keine Angabe																																	
enumeration	1	Ausgabetransaktion - Applikation oder Berechtigung																																	
enumeration	2	Entwertung																																	
enumeration	11	CI																																	
enumeration	12	CO																																	
enumeration	15	Einzahlung - Berechtigung																																	
enumeration	16	CI nach Fahrtfortsetzung																																	
enumeration	18	NTP Aendern																																	
enumeration	20	Sperrtransaktion Applikation oder Berechtigung																																	
enumeration	21	Entsperrtransaktion Applikation oder Berechtigung																																	

enumeration	22	BI
enumeration	23	BO
enumeration	24	INOUT
enumeration	25	Rueckgabetransaktion - Applikation oder Berechtigung
enumeration	27	Kontrolle
enumeration	28	Belastungstransaktion - Berechtigung und Gutschriften bei Rueckzahlung (POB/PEB/WEB)
enumeration	29	Belastungstransaktion WEB mit Autoload
enumeration	30	WEB Buchung(Laden/Entladen)
enumeration	31	WEB-CI mit Autoload
enumeration	32	WEB-CO mit Autoload
enumeration	33	Kontrolle nach CI; BIBO oder Entwertung
enumeration	34	Check personal (CPKontrolldatensatz fuer Kontrollterminal)
enumeration	35	Auto CO
enumeration	36	manuelles CO (nachtraeglich durch den Nutzer)
enumeration	37	Ausgabe EFS ueber Aktionsliste
enumeration	38	Entsperrtransaktion EFS ueber Aktionsliste
enumeration	39	Rückgabetransaktion EFS ueber Aktionsliste
Source	<xss:element name="logTransaktionsTyp" type="ion:NmTransaktionsTyp_CODE"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd	

Element tns:TXELISBER_Type / tns:tx_identam

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class tx_identam { Type tns:TX_IDENTAM_Type } class tns:TX_IDENTAM_Type { amTerminalGruppe_ID amTerminal_ID amAenderungsreferenz_ID appInstanz_ID logTransaktionsOperator_ID berBerechtigung_ID prodProdukt_ID prodKeyOrganisation_ID berStatus } tx_identam "0..1" o-- "1..1" tns:TX_IDENTAM_Type </pre>
Type	tns:TX_IDENTAM_Type
Properties	content: complex
Model	tns:amTerminalGruppe_ID , tns:amTerminal_ID , tns:amAenderungsreferenz_ID , tns:appInstanz_ID , tns:logTransaktionsOperator_ID , tns:berBerechtigung_ID , tns:prodProdukt_ID , tns:prodKeyOrganisation_ID , tns:berStatus , tns:berSynchronNummer

Children	tns:amAenderungsreferenz_ID, tns:amTerminalGruppe_ID, tns:amTerminal_ID, tns:appInstanz_ID, tns:berBerechtigung_ID, tns:berStatus, tns:berSynchronNummer, tns:logTransaktionsOperator_ID, tns:prodKeyOrganisation_ID, tns:prodProdukt_ID
Instance	<pre><tns:tx_identam xmlns:tns="http://vdv/ka/alise/2"> <tns:amTerminalGruppe_ID>{1,1}</tns:amTerminalGruppe_ID> <tns:amTerminal_ID>{1,1}</tns:amTerminal_ID> <tns:amAenderungsreferenz_ID>{1,1}</tns:amAenderungsreferenz_ID> <tns:appInstanz_ID>{1,1}</tns:appInstanz_ID> <tns:logTransaktionsOperator_ID>{1,1}</tns:logTransaktionsOperator_ID> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> <tns:prodKeyOrganisation_ID>{1,1}</tns:prodKeyOrganisation_ID> <tns:berStatus>{1,1}</tns:berStatus> <tns:berSynchronNummer>{1,1}</tns:berSynchronNummer> </tns:tx_identam></pre>
Source	<xss:element name="tx_identam" type="tns:TX_IDENTAM_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMTL_Type / tns:amListeSender_ID


Namespace	http://vdv/ka/alise/2	
Diagram	<pre> classDiagram class amListeSender_ID { attribute ka:Organisation_ID } class amListeSender_ID { attribute ka:Organisation_ID } amListeSender_ID "1" -- "1" ka:Organisation_ID </pre>	
Type	tns:Organisation_ID	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 	
Properties	content: simple	
Facets	maxInclusive	65535
	minInclusive	0
Source	<xss:element name="amListeSender_ID" type="ka:Organisation_ID"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd	

Element tns:TXAMTL_Type / tns:amListeEmpfaenger_ID


Namespace	http://vdv/ka/alise/2	
Diagram	<pre> classDiagram class amListeEmpfaenger_ID { attribute ka:Organisation_ID } class amListeEmpfaenger_ID { attribute ka:Organisation_ID } amListeEmpfaenger_ID "1" -- "1" ka:Organisation_ID </pre>	
Type	tns:Organisation_ID	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 	
Properties	content: simple	
Facets	maxInclusive	65535
	minInclusive	0
Source	<xss:element name="amListeEmpfaenger_ID" type="ka:Organisation_ID"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd	

Element tns:TXAMTL_Type / tns:amListeNummer

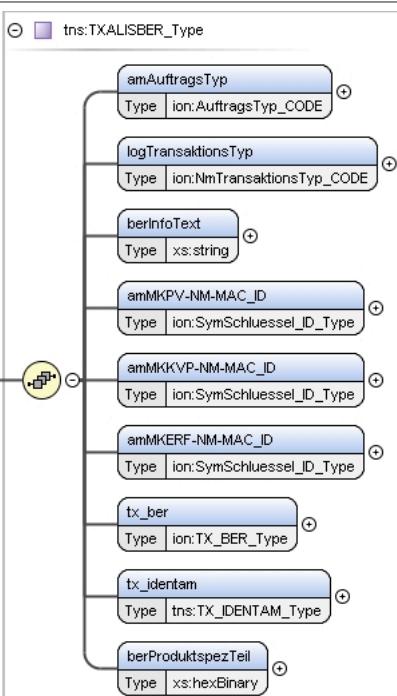
Namespace	http://vdv/ka/alise/2
-----------	-----------------------

Diagram					
Type	tns:ReferenceNumberFour				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT4 tns:ReferenceNumberFour 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>4294967295</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Source	<xs:element name="amListeNummer" type="ct:ReferenceNumberFour" />				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd				

Element tns:TXAMTL_Type / tns:amListeZeitstempel

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:DateTime
Properties	content: simple
Source	<xs:element name="amListeZeitstempel" type="ct:DateTime" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMTL_Type / tns:txalisber

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:TXALISBER_Type
Properties	content: complex
Model	tns:amAuftragsTyp , tns:logTransaktionsTyp , tns:berInfoText , tns:amMKPV-NM-MAC_ID , tns:amMKKVP-NM-MAC_ID , tns:amMKERF-NM-MAC_ID , tns:tx_ber , tns:tx_identam , tns:berProduktspezTeil

Children	tns:amAuftragsTyp, tns:amMKERF-NM-MAC_ID, tns:amMKKVP-NM-MAC_ID, tns:amMKPV-NM-MAC_ID, tns:berInfoText, tns:berProduktspezTeil, tns:logTransaktionsTyp, tns:tx_ber, tns:tx_identam
Instance	<pre><tns:txalisber xmlns:tns="http://vdv/ka/alise/2"> <tns:amAuftragsTyp>{1,1}</tns:amAuftragsTyp> <tns:logTransaktionsTyp>{1,1}</tns:logTransaktionsTyp> <tns:berInfoText>{1,1}</tns:berInfoText> <tns:amMKPV-NM-MAC_ID>{1,1}</tns:amMKPV-NM-MAC_ID> <tns:amMKKVP-NM-MAC_ID>{1,1}</tns:amMKKVP-NM-MAC_ID> <tns:amMKERF-NM-MAC_ID>{1,1}</tns:amMKERF-NM-MAC_ID> <tns:tx_ber>{1,1}</tns:tx_ber> <tns:tx_identam>{1,1}</tns:tx_identam> <tns:berProduktspezTeil>{1,1}</tns:berProduktspezTeil> </tns:txalisber></pre>
Source	<xss:element name="txalisber" type="tns:TXALISBER_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMTL_Type / tns:txrlisber

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram TXRLISBER_Type < -- txrlisber TXRLISBER_Type { <<tns:TXRLISBER_Type>> amAuftragsTyp logTransaktionsTyp tx_identam } TXRLISBER_Type < -- TXRLISBER_Type </pre>
Type	tns:TXRLISBER_Type
Properties	content: complex
Model	tns:amAuftragsTyp , tns:logTransaktionsTyp , tns:tx_identam
Children	tns:amAuftragsTyp, tns:logTransaktionsTyp, tns:tx_identam
Instance	<pre><tns:txrlisber xmlns:tns="http://vdv/ka/alise/2"> <tns:amAuftragsTyp>{1,1}</tns:amAuftragsTyp> <tns:logTransaktionsTyp>{1,1}</tns:logTransaktionsTyp> <tns:tx_identam>{1,1}</tns:tx_identam> </tns:txrlisber></pre>
Source	<xss:element name="txrlisber" type="tns:TXRLISBER_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMTL_Type / tns:txelisber

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram TXELISBER_Type < -- txelisber TXELISBER_Type { <<tns:TXELISBER_Type>> amAuftragsTyp logTransaktionsTyp tx_identam } TXELISBER_Type < -- TXELISBER_Type </pre>
Type	tns:TXELISBER_Type
Properties	content: complex
Model	tns:amAuftragsTyp , tns:logTransaktionsTyp , tns:tx_identam
Children	tns:amAuftragsTyp, tns:logTransaktionsTyp, tns:tx_identam
Instance	<pre><tns:txelisber xmlns:tns="http://vdv/ka/alise/2"> <tns:amAuftragsTyp>{1,1}</tns:amAuftragsTyp></pre>

	<pre><tns:logTransaktionsTyp>{1,1}</tns:logTransaktionsTyp> <tns:tx_identam>{1,1}</tns:tx_identam> </tns:txelisber></pre>
Source	<code><x:element name="txelisber" type="tns:TXELISBER_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMDL_Type / tns:amListeSender_ID

Namespace	http://vdv/ka/alise/2				
Diagram	<pre> classDiagram class amListeSender_ID { <<Type>> } class ka_Organisation_ID { <<Type>> } amListeSender_ID "0..1" --> "1..1" ka_Organisation_ID </pre>				
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><x:element name="amListeSender_ID" type="ka:Organisation_ID" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd				

Element tns:TXAMDL_Type / tns:amListeEmpfaenger_ID

Namespace	http://vdv/ka/alise/2				
Diagram	<pre> classDiagram class amListeEmpfaenger_ID { <<Type>> } class ka_Organisation_ID { <<Type>> } amListeEmpfaenger_ID "0..1" --> "1..1" ka_Organisation_ID </pre>				
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><x:element name="amListeEmpfaenger_ID" type="ka:Organisation_ID" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd				

Element tns:TXAMDL_Type / tns:amListeNummer

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class amListeNummer { <<Type>> } class ct_ReferenceNumberFour { <<Type>> } amListeNummer "0..1" --> "1..1" ct_ReferenceNumberFour </pre>
Type	tns:ReferenceNumberFour
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4

	<ul style="list-style-type: none"> • tns:ReferenceNumberFour
Properties	content: simple
Facets	maxInclusive 4294967295 minInclusive 0
Source	<xs:element name="amListeNummer" type="ct:ReferenceNumberFour" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMDL_Type / tns:amListeZeitstempel

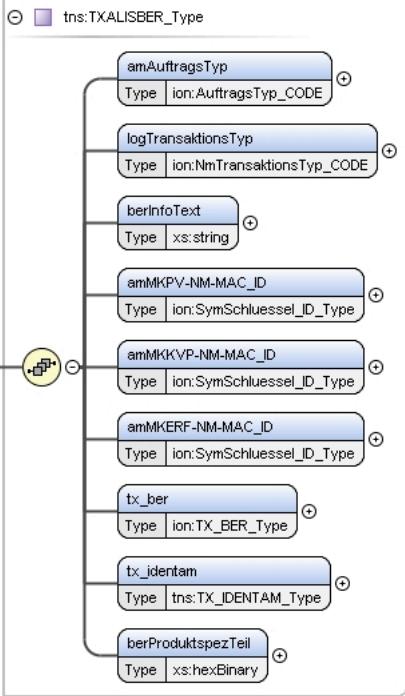
Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class amListeZeitstempel { <<Type>> } class ctDateTime { <<ct:DateTime>> } amListeZeitstempel o-- ctDateTime </pre>
Type	tns:DateTime
Properties	content: simple
Source	<xs:element name="amListeZeitstempel" type="ct:DateTime" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMDL_Type / tns:amListePruefsumme

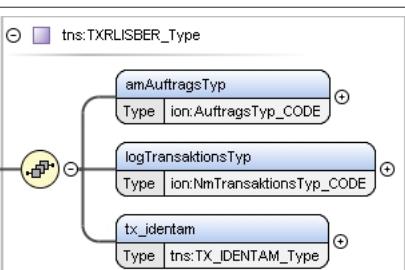
Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class amListePruefsumme { <<Type>> <<Restriction of xs:hexBinary>> } class xsHexBinary { <<restricts: xs:hexBinary>> } amListePruefsumme o-- xsHexBinary </pre>
Type	restriction of xs:hexBinary
Properties	content: simple nillable: true
Facets	length 32
Source	<xs:element name="amListePruefsumme" nillable="true"> <xs:simpleType> <xs:restriction base="xs:hexBinary"> <xs:length value="32" fixed="true"/> </xs:restriction> </xs:simpleType> </xs:element>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMDL_Type / tns:txalisber

Namespace	http://vdv/ka/alise/2
-----------	-----------------------

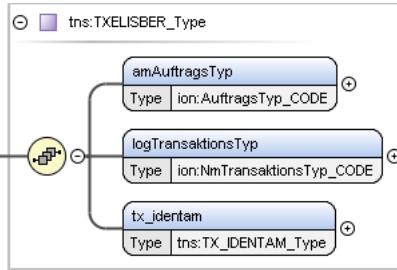
Diagram	
Type	tns:TXALISBER_Type
Properties	content: complex
Model	tns:amAuftragsTyp , tns:logTransaktionsTyp , tns:berInfoText , tns:amMKPV-NM-MAC_ID , tns:amMKKVP-NM-MAC_ID , tns:amMKERF-NM-MAC_ID , tns:tx_ber , tns:tx_identam , tns:berProduktspezTeil
Children	tns:amAuftragsTyp, tns:amMKERF-NM-MAC_ID, tns:amMKKVP-NM-MAC_ID, tns:amMKPV-NM-MAC_ID, tns:berInfoText, tns:berProduktspezTeil, tns:logTransaktionsTyp, tns:tx_ber, tns:tx_identam
Instance	<pre><tns:txalisber xmlns:tns="http://vdv/ka/alise/2"> <tns:amAuftragsTyp>{1,1}</tns:amAuftragsTyp> <tns:logTransaktionsTyp>{1,1}</tns:logTransaktionsTyp> <tns:berInfoText>{1,1}</tns:berInfoText> <tns:amMKPV-NM-MAC_ID>{1,1}</tns:amMKPV-NM-MAC_ID> <tns:amMKKVP-NM-MAC_ID>{1,1}</tns:amMKKVP-NM-MAC_ID> <tns:amMKERF-NM-MAC_ID>{1,1}</tns:amMKERF-NM-MAC_ID> <tns:tx_ber>{1,1}</tns:tx_ber> <tns:tx_identam>{1,1}</tns:tx_identam> <tns:berProduktspezTeil>{1,1}</tns:berProduktspezTeil> </tns:txalisber></pre>
Source	<code><x:element name="txalisber" type="tns:TXALISBER_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMDL_Type / tns:txrlisber

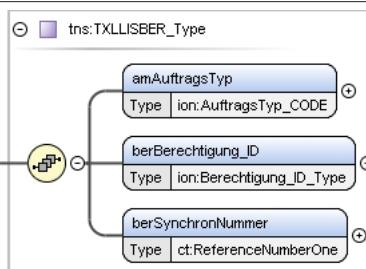
Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:TXRLISBER_Type
Properties	content: complex
Model	tns:amAuftragsTyp , tns:logTransaktionsTyp , tns:tx_identam
Children	tns:amAuftragsTyp, tns:logTransaktionsTyp, tns:tx_identam

Instance	<pre><tns:txrlisber xmlns:tns="http://vdv/ka/alise/2"> <tns:amAuftragsTyp>{1,1}</tns:amAuftragsTyp> <tns:logTransaktionsTyp>{1,1}</tns:logTransaktionsTyp> <tns:tx_identam>{1,1}</tns:tx_identam> </tns:txrlisber></pre>
Source	<pre><xss:element name="txrlisber" type="tns:TXRLISBER_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMDL_Type / tns:txelisber

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:TXELISBER_Type
Properties	content: complex
Model	tns:amAuftragsTyp , tns:logTransaktionsTyp , tns:tx_identam
Children	tns:amAuftragsTyp, tns:logTransaktionsTyp, tns:tx_identam
Instance	<pre><tns:txelisber xmlns:tns="http://vdv/ka/alise/2"> <tns:amAuftragsTyp>{1,1}</tns:amAuftragsTyp> <tns:logTransaktionsTyp>{1,1}</tns:logTransaktionsTyp> <tns:tx_identam>{1,1}</tns:tx_identam> </tns:txelisber></pre>
Source	<pre><xss:element name="txelisber" type="tns:TXELISBER_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMDL_Type / tns:txllisber

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:TXLLISBER_Type
Properties	content: complex
Model	tns:amAuftragsTyp , tns:berBerechtigung_ID , tns:berSynchronNummer
Children	tns:amAuftragsTyp, tns:berBerechtigung_ID, tns:berSynchronNummer
Instance	<pre><tns:txllisber xmlns:tns="http://vdv/ka/alise/2"> <tns:amAuftragsTyp>{1,1}</tns:amAuftragsTyp> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:berSynchronNummer>{1,1}</tns:berSynchronNummer> </tns:txllisber></pre>
Source	<pre><xss:element name="txllisber" type="tns:TXLLISBER_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXLLISBER_Type / tns:amAuftragsTyp

Namespace	http://vdv/ka/alise/2	
Diagram	<pre> classDiagram class amAuftragsTyp { <<Type ion:AuftragsTyp_CODE>> } class ion:AuftragsTyp_CODE amAuftragsTyp "1" --> "1" ion:AuftragsTyp_CODE </pre>	
Type	tns:AuftragsTyp_CODE	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:AuftragsTyp_CODE 	
Properties	content: simple	
Facets	maxInclusive	255
	minInclusive	0
Source	<xss:element name="amAuftragsTyp" type="ion:AuftragsTyp_CODE"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd	

Element tns:TXLLISBER_Type / tns:berBerechtigung_ID

Namespace	http://vdv/ka/alise/2	
Diagram	<pre> classDiagram class berBerechtigung_ID { <<Type ion:Berechtigung_ID_Type>> } class ion:Berechtigung_ID_Type class berechtigungNummer class kvp_ID berBerechtigung_ID "1" --> "1" ion:Berechtigung_ID_Type berBerechtigung_ID "*" --> "1" berechtigungNummer berBerechtigung_ID "*" --> "1" kvp_ID </pre>	
Type	tns:Berechtigung_ID_Type	
Properties	content: complex	
Model	berechtigungNummer , kvp_ID	
Children	berechtigungNummer, kvp_ID	
Instance	<tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/alise/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID>	
Source	<xss:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd	

Element tns:TXLLISBER_Type / tns:berSynchronNummer

Namespace	http://vdv/ka/alise/2	
Diagram	<pre> classDiagram class berSynchronNummer { <<Type ct:ReferenceNumberOne>> } class ct:ReferenceNumberOne berSynchronNummer "1" --> "1" ct:ReferenceNumberOne </pre>	
Type	tns:ReferenceNumberOne	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:ReferenceNumberOne 	
Properties	content: simple	
Facets	maxInclusive	255
	minInclusive	0
Source	<xss:element name="berSynchronNummer" type="ct:ReferenceNumberOne"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd	

Element tns:TXAMTDL_Type / tns:amListeSender_ID

Namespace	http://vdv/ka/alise/2	
Diagram	<pre> classDiagram class amListeSender_ID { <<Type>> } class ka_Organisation_ID { <<Type>> } amListeSender_ID "0..1" --> "1..1" ka_Organisation_ID </pre>	
Type	tns:Organisation_ID	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 	
Properties	content: simple	
Facets	maxInclusive	65535
	minInclusive	0
Source	<xs:element name="amListeSender_ID" type="ka:Organisation_ID"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd	

Element tns:TXAMTDL_Type / tns:amListeEmpfaenger_ID

Namespace	http://vdv/ka/alise/2	
Diagram	<pre> classDiagram class amListeEmpfaenger_ID { <<Type>> } class ka_Organisation_ID { <<Type>> } amListeEmpfaenger_ID "0..1" --> "1..1" ka_Organisation_ID </pre>	
Type	tns:Organisation_ID	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 	
Properties	content: simple	
Facets	maxInclusive	65535
	minInclusive	0
Source	<xs:element name="amListeEmpfaenger_ID" type="ka:Organisation_ID"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd	


Element tns:TXAMTDL_Type / tns:amListeNummer

Namespace	http://vdv/ka/alise/2	
Diagram	<pre> classDiagram class amListeNummer { <<Type>> } class ct_ReferenceNumberFour { <<Type>> } amListeNummer "0..1" --> "1..1" ct_ReferenceNumberFour </pre>	
Type	tns:ReferenceNumberFour	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:ReferenceNumberFour 	
Properties	content: simple	
Facets	maxInclusive	4294967295
	minInclusive	0
Source	<xs:element name="amListeNummer" type="ct:ReferenceNumberFour"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd	

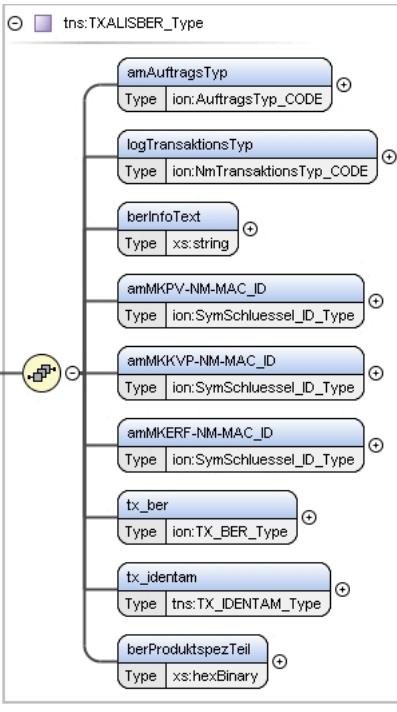
Element tns:TXAMTDL_Type / tns:amListeZeitstempel

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:DateTime
Properties	content: simple
Source	<xs:element name="amListeZeitstempel" type="ct:DateTime"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMTDL_Type / tns:amListePruefsumme

Namespace	http://vdv/ka/alise/2
Diagram	
Type	restriction of xs:hexBinary
Properties	content: simple nillable: true
Facets	length 32
Source	<xs:element name="amListePruefsumme" nillable="true"> <xs:simpleType> <xs:restriction base="xs:hexBinary"> <xs:length value="32" fixed="true"/> </xs:restriction> <br < td="" xs:element><="" xs:simpletype>
<=""></br <>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMTDL_Type / tns:txalisber

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:TXALISBER_Type

Properties	content: complex
Model	tns:amAuftragsTyp , tns:logTransaktionsTyp , tns:berInfoText , tns:amMKPV-NM-MAC_ID , tns:amMKKVP-NM-MAC_ID , tns:amMKERF-NM-MAC_ID , tns:tx_ber , tns:tx_identam , tns:berProduktspezTeil
Children	tns:amAuftragsTyp, tns:amMKERF-NM-MAC_ID, tns:amMKKVP-NM-MAC_ID, tns:amMKPV-NM-MAC_ID, tns:berInfoText, tns:berProduktspezTeil, tns:logTransaktionsTyp, tns:tx_ber, tns:tx_identam
Instance	<pre><tns:txalisber xmlns:tns="http://vdv/ka/alise/2"> <tns:amAuftragsTyp>{1,1}</tns:amAuftragsTyp> <tns:logTransaktionsTyp>{1,1}</tns:logTransaktionsTyp> <tns:berInfoText>{1,1}</tns:berInfoText> <tns:amMKPV-NM-MAC_ID>{1,1}</tns:amMKPV-NM-MAC_ID> <tns:amMKKVP-NM-MAC_ID>{1,1}</tns:amMKKVP-NM-MAC_ID> <tns:amMKERF-NM-MAC_ID>{1,1}</tns:amMKERF-NM-MAC_ID> <tns:tx_ber>{1,1}</tns:tx_ber> <tns:tx_identam>{1,1}</tns:tx_identam> <tns:berProduktspezTeil>{1,1}</tns:berProduktspezTeil> </tns:txalisber></pre>
Source	<xss:element name="txalisber" type="tns:TXALISBER_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMTDL_Type / tns:txrlisber

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class txrlisber { Type tns:TXRLISBER_Type } class TXRLISBER_Type { amAuftragsTyp logTransaktionsTyp tx_identam } txrlisber < -- TXRLISBER_Type </pre>
Type	tns:TXRLISBER_Type
Properties	content: complex
Model	tns:amAuftragsTyp , tns:logTransaktionsTyp , tns:tx_identam
Children	tns:amAuftragsTyp, tns:logTransaktionsTyp, tns:tx_identam
Instance	<pre><tns:txrlisber xmlns:tns="http://vdv/ka/alise/2"> <tns:amAuftragsTyp>{1,1}</tns:amAuftragsTyp> <tns:logTransaktionsTyp>{1,1}</tns:logTransaktionsTyp> <tns:tx_identam>{1,1}</tns:tx_identam> </tns:txrlisber></pre>
Source	<xss:element name="txrlisber" type="tns:TXRLISBER_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMTDL_Type / tns:txelisber

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class txelisber { Type tns:TXELISBER_Type } class TXELISBER_Type { amAuftragsTyp logTransaktionsTyp tx_identam } txelisber < -- TXELISBER_Type </pre>
Type	tns:TXELISBER_Type
Properties	content: complex
Model	tns:amAuftragsTyp , tns:logTransaktionsTyp , tns:tx_identam

Children	tns:amAuftragsTyp, tns:logTransaktionsTyp, tns:tx_identam
Instance	<tns:txelisber xmlns:tns="http://vdv/ka/alise/2"> <tns:amAuftragsTyp>{1,1}</tns:amAuftragsTyp> <tns:logTransaktionsTyp>{1,1}</tns:logTransaktionsTyp> <tns:tx_identam>{1,1}</tns:tx_identam> </tns:txelisber>
Source	<xss:element name="txelisber" type="tns:TXELISBER_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMTDL_Type / tns:txllisber

Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class txllisber { <<tns:TXLLISBER_Type>> } class amAuftragsTyp { <<ion:AuftragsTyp_CODE>> } class berBerechtigung_ID { <<ion:Berechtigung_ID_Type>> } class berSynchronNummer { <<ct:ReferenceNumberOne>> } txllisber "0..1" o-- "1..1" amAuftragsTyp txllisber "0..1" o-- "1..1" berBerechtigung_ID txllisber "0..1" o-- "1..1" berSynchronNummer </pre>
Type	tns:TXLLISBER_Type
Properties	content: complex
Model	tns:amAuftragsTyp , tns:berBerechtigung_ID , tns:berSynchronNummer
Children	tns:amAuftragsTyp, tns:berBerechtigung_ID, tns:berSynchronNummer
Instance	<tns:txllisber xmlns:tns="http://vdv/ka/alise/2"> <tns:amAuftragsTyp>{1,1}</tns:amAuftragsTyp> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:berSynchronNummer>{1,1}</tns:berSynchronNummer> </tns:txllisber>
Source	<xss:element name="txllisber" type="tns:TXLLISBER_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMK_Type / tns:amKonfigurationTyp


Namespace	http://vdv/ka/alise/2				
Diagram	<pre> classDiagram class amKonfigurationTyp { <<ct:INT1>> } class ct:INT1 amKonfigurationTyp "0..1" o-- "1..1" ct:INT1 </pre>				
Type	tns:INT1				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<xss:element name="amKonfigurationTyp" type="ct:INT1" />				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd				

Element tns:TXAMK_Type / tns:amTerminalGruppe_ID


Namespace	http://vdv/ka/alise/2
Diagram	<pre> classDiagram class amTerminalGruppe_ID { <<tns:TerminalGruppe_ID_Type>> } class terminalGruppenNummer { <<ct:ReferenceNumberTwo>> } class pv_ID { <<ka:Organisation_ID>> } amTerminalGruppe_ID "0..1" o-- "1..1" terminalGruppenNummer amTerminalGruppe_ID "0..1" o-- "1..1" pv_ID </pre>

Type	tns:TerminalGruppe_ID_Type
Properties	content: complex
Model	tns:terminalGruppenNummer , tns:pv_ID
Children	tns:pv_ID, tns:terminalGruppenNummer
Instance	<tns:amTerminalGruppe_ID xmlns:tns="http://vdv/ka/alise/2"> <tns:terminalGruppenNummer>{1,1}</tns:terminalGruppenNummer> <tns:pv_ID>{1,1}</tns:pv_ID> </tns:amTerminalGruppe_ID>
Source	<xss:element name="amTerminalGruppe_ID" type="tns:TerminalGruppe_ID_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMK_Type / tns:amTerminalGruppeBezeichnung

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:PrintableString
Properties	content: simple
Facets	pattern [-p]*
Source	<xss:element name="amTerminalGruppeBezeichnung" type="ion:PrintableString" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMK_Type / tns:amTerminalGruppeZusatzinfo

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:PrintableString
Properties	content: simple
Facets	pattern [-p]*
Source	<xss:element name="amTerminalGruppeZusatzinfo" type="ion:PrintableString" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMK_Type / tns:amTerminalGruppeStatus

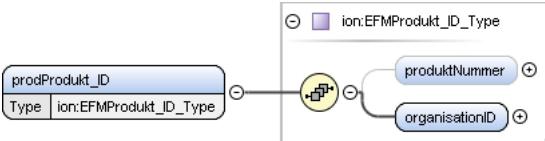
Namespace	http://vdv/ka/alise/2
Diagram	
Type	xs:boolean
Properties	content: simple
Source	<xss:element name="amTerminalGruppeStatus" type="xs:boolean" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMK_Type / tns:amTerminalGruppeTyp


Namespace	http://vdv/ka/alise/2
Diagram	

Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<xss:element name="amTerminalGruppeTyp" type="ct:INT1"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd


Element tns:TXAMK_Type / tns:prodProdukt_ID

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:EFMProdukt_ID_Type
Properties	content: complex
Model	produktNummer{0,1} , organisationID
Children	organisationID, produktNummer
Instance	<tns:prodProdukt_ID xmlns:tns="http://vdv/ka/alise/2"> <produktNummer>{0,1}</produktNummer> <organisationID>{1,1}</organisationID> </tns:prodProdukt_ID>
Source	<xss:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMK_Type / tns:amTerminal_ID


Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:Terminal_ID_Type
Properties	content: complex
Model	terminalTyp , terminalNummer , terminalOwner_ID
Children	terminalNummer, terminalOwner_ID, terminalTyp
Instance	<tns:amTerminal_ID xmlns:tns="http://vdv/ka/alise/2"> <terminalTyp>{1,1}</terminalTyp> <terminalNummer>{1,1}</terminalNummer> <terminalOwner_ID>{1,1}</terminalOwner_ID> </tns:amTerminal_ID>
Source	<xss:element name="amTerminal_ID" type="ion:Terminal_ID_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMK_Type / tns:amTerminalBezeichnung


Namespace	http://vdv/ka/alise/2
Diagram	

Type	tns:PrintableString
Properties	content: simple
Facets	pattern [-þ]*
Source	<xs:element name="amTerminalBezeichnung" type="ion:PrintableString"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd


Element tns:TXAMK_Type / tns:amTerminalZusatzinfo

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:PrintableString
Properties	content: simple
Facets	pattern [-þ]*
Source	<xs:element name="amTerminalZusatzinfo" type="ion:PrintableString"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd


Element tns:TXAMK_Type / tns:amProduktStatus

Namespace	http://vdv/ka/alise/2
Diagram	
Type	xs:boolean
Properties	content: simple
Source	<xs:element name="amProduktStatus" type="xs:boolean"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd


Element tns:TXAMK_Type / tns:amAktLStatus

Namespace	http://vdv/ka/alise/2
Diagram	
Type	xs:boolean
Properties	content: simple
Source	<xs:element name="amAktLStatus" type="xs:boolean"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd


Element tns:TXAMK_Type / tns:amAktDLStatus

Namespace	http://vdv/ka/alise/2
Diagram	
Type	xs:boolean
Properties	content: simple
Source	<xs:element name="amAktDLStatus" type="xs:boolean"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

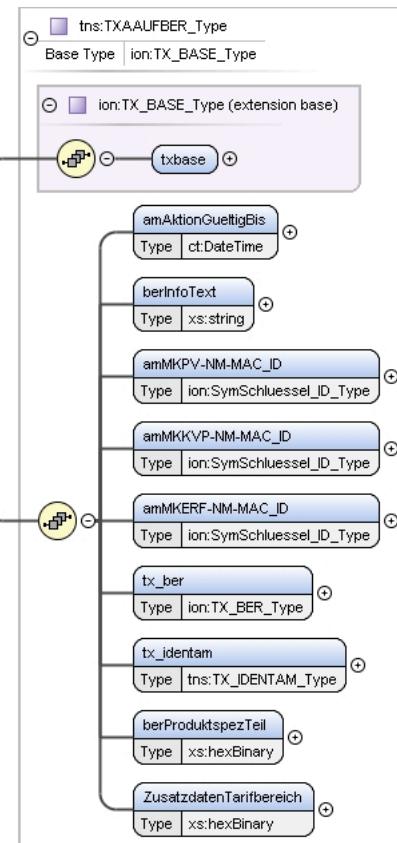
Element tns:TXAMK_Type / tns:amAktLZeitpunkt

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:DateTime
Properties	content: simple
Source	<xss:element name="amAktLZeitpunkt" type="ct:DateTime"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMK_Type / tns:amAktDLZeitpunkt

Namespace	http://vdv/ka/alise/2
Diagram	
Type	tns:DateTime
Properties	content: simple
Source	<xss:element name="amAktDLZeitpunkt" type="ct:DateTime"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAAUFBER

Namespace	http://vdv/ka/alise/2
Annotations	Element: Aktionsauftrag Berechtigung
Diagram	
Type	tns:TXAAUFBER_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXAAUFBER_Type

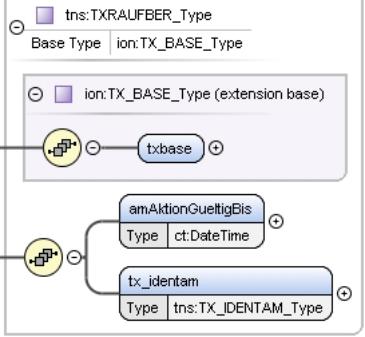
Properties	content: complex
Model	txbase , tns:amAktionGueltigBis , tns:berInfoText , tns:amMKPV-NM-MAC_ID , tns:amMKKVP-NM-MAC_ID , tns:amMKERF-NM-MAC_ID , tns:tx_ber , tns:tx_identam , tns:berProduktspezTeil , tns:ZusatzdatenTarifbereich
Children	tns:ZusatzdatenTarifbereich, tns:amAktionGueltigBis, tns:amMKERF-NM-MAC_ID, tns:amMKKVP-NM-MAC_ID, tns:amMKPV-NM-MAC_ID, tns:berInfoText, tns:berProduktspezTeil, tns:tx_ber, tns:tx_identam, txbase
Instance	<pre><tns:TXAAUFBER xmlns:tns="http://vdv/ka/alise/2"> <txbase>{1,1}</txbase> <tns:amAktionGueltigBis>{1,1}</tns:amAktionGueltigBis> <tns:berInfoText>{1,1}</tns:berInfoText> <tns:amMKPV-NM-MAC_ID>{1,1}</tns:amMKPV-NM-MAC_ID> <tns:amMKKVP-NM-MAC_ID>{1,1}</tns:amMKKVP-NM-MAC_ID> <tns:amMKERF-NM-MAC_ID>{1,1}</tns:amMKERF-NM-MAC_ID> <tns:tx_ber>{1,1}</tns:tx_ber> <tns:tx_identam>{1,1}</tns:tx_identam> <tns:berProduktspezTeil>{1,1}</tns:berProduktspezTeil> <tns:ZusatzdatenTarifbereich>{1,1}</tns:ZusatzdatenTarifbereich> </tns:TXAAUFBER></pre>
Source	<pre><xss:element name="TXAAUFBER" type="tns:TXAAUFBER_Type"> <xss:annotation> <xss:documentation>Element: Aktionsauftrag Berechtigung</xss:documentation> </xss:annotation> </xss:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXEAUFBER

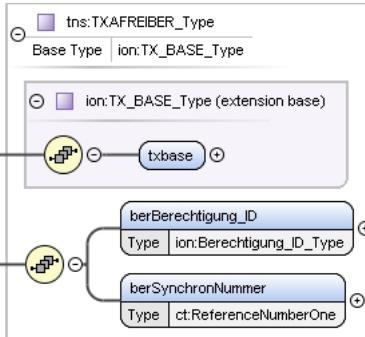
Namespace	http://vdv/ka/alise/2
Annotations	Element: Aktionsauftrag Entsperrung Berechtigung
Diagram	<pre> classDiagram TXEAUFBER < -- TX_BASE_Type TXEAUFBER "1..1" --> txbase TXEAUFBER "1..1" --> amAktionGueltigBis TXEAUFBER "1..1" --> tx_identam </pre>
Type	tns:TXEAUFBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXEAUFBER_Type
Properties	content: complex
Model	txbase , tns:amAktionGueltigBis , tns:tx_identam
Children	tns:amAktionGueltigBis, tns:tx_identam, txbase
Instance	<pre><tns:TXEAUFBER xmlns:tns="http://vdv/ka/alise/2"> <txbase>{1,1}</txbase> <tns:amAktionGueltigBis>{1,1}</tns:amAktionGueltigBis> <tns:tx_identam>{1,1}</tns:tx_identam> </tns:TXEAUFBER></pre>
Source	<pre><xss:element name="TXEAUFBER" type="tns:TXEAUFBER_Type"> <xss:annotation> <xss:documentation>Element: Aktionsauftrag Entsperrung Berechtigung</xss:documentation> </xss:annotation> </xss:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXRAUFBER

Namespace	http://vdv/ka/alise/2
Annotations	Element: Aktionsauftrag Ruecknahme Berechtigung

Diagram	
Type	tns:TXRAUFBER_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXRAUFBER_Type
Properties	content: complex
Model	txbase , tns:amAktionGueltigBis , tns:tx_identam
Children	tns:amAktionGueltigBis, tns:tx_identam, txbase
Instance	<pre><tns:TXRAUFBER xmlns:tns="http://vdv/ka/alise/2"> <txbase>{1,1}</txbase> <tns:amAktionGueltigBis>{1,1}</tns:amAktionGueltigBis> <tns:tx_identam>{1,1}</tns:tx_identam> </tns:TXRAUFBER></pre>
Source	<pre><xs:element name="TXRAUFBER" type="tns:TXRAUFBER_Type"> <xs:annotation> <xs:documentation>Element: Aktionsauftrag Ruecknahme Berechtigung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAFREIBER

Namespace	http://vdv/ka/alise/2
Annotations	Element: Aktionsfreigabeaufrag Berechtigung
Diagram	
Type	tns:TXAFREIBER_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXAFREIBER_Type
Properties	content: complex
Model	txbase , tns:berBerechtigung_ID , tns:berSynchronNummer
Children	tns:berBerechtigung_ID, tns:berSynchronNummer, txbase
Instance	<pre><tns:TXAFREIBER xmlns:tns="http://vdv/ka/alise/2"> <txbase>{1,1}</txbase> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:berSynchronNummer>{1,1}</tns:berSynchronNummer> </tns:TXAFREIBER></pre>
Source	<pre><xs:element name="TXAFREIBER" type="tns:TXAFREIBER_Type"> <xs:annotation></pre>

	<pre><xs:documentation>Element: Aktionsfreigabeauftrag Berechtigung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAFREIMITBER

Namespace	http://vdv/ka/alise/2
Annotations	Element: Aktionsfreigabemitteilung Berechtigung
Diagram	<pre> classDiagram TXAFREIMITBER < -- TX_BASE_Type TXAFREIMITBER { txbase : TX_BASE_Type berBerechtigung_ID : Berechtigung_ID_Type berSynchronNummer : ReferenceNumberOne } TX_AFREIMITBER_Type { Base Type : TX_BASE_Type ion:TX_BASE_Type (extension base) } </pre>
Type	tns:TXAFREIMITBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAFREIMITBER_Type
Properties	content: complex
Model	txbase , tns:berBerechtigung_ID , tns:berSynchronNummer
Children	tns:berBerechtigung_ID, tns:berSynchronNummer, txbase
Instance	<pre> <tns:TXAFREIMITBER xmlns:tns="http://vdv/ka/alise/2"> <txbase>{1,1}</txbase> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:berSynchronNummer>{1,1}</tns:berSynchronNummer> </tns:TXAFREIMITBER> </pre>
Source	<pre> <xs:element name="TXAFREIMITBER" type="tns:TXAFREIMITBER_Type"> <xs:annotation> <xs:documentation>Element: Aktionsfreigabemitteilung Berechtigung</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMK

Namespace	http://vdv/ka/alise/2
Annotations	Element: Konfiguration ALISE

Diagram	
Type	tns:TXAMK_Type
Properties	content: complex
Model	tns:amKonfigurationTyp , tns:amTerminalGruppe_ID , tns:amTerminalGruppeBezeichnung , tns:amTerminalGruppeZusatzinfo , tns:amTerminalGruppeStatus , tns:amTerminalGruppeTyp , tns:prodProdukt_ID , tns:amTerminal_ID , tns:amTerminalBezeichnung , tns:amTerminalZusatzinfo , tns:amProduktStatus , tns:amAktLStatus , tns:amAktDLStatus , tns:amAktLZeitpunkt , tns:amAktDLZeitpunkt
Children	tns:amAktDLStatus, tns:amAktLZeitpunkt, tns:amAktLStatus, tns:amAktLZeitpunkt, tns:amKonfigurationTyp, tns:amProduktStatus, tns:amTerminalBezeichnung, tns:amTerminalGruppeBezeichnung, tns:amTerminalGruppeStatus, tns:amTerminalGruppeTyp, tns:amTerminalGruppeZusatzinfo, tns:amTerminalGruppe_ID, tns:amTerminalZusatzinfo, tns:amTerminal_ID, tns:prodProdukt_ID
Instance	<pre> <tns:TXAMK xmlns:tns="http://vdv/ka/alise/2"> <tns:amKonfigurationTyp>{1,1}</tns:amKonfigurationTyp> <tns:amTerminalGruppe_ID>{1,1}</tns:amTerminalGruppe_ID> <tns:amTerminalGruppeBezeichnung>{1,1}</tns:amTerminalGruppeBezeichnung> <tns:amTerminalGruppeZusatzinfo>{1,1}</tns:amTerminalGruppeZusatzinfo> <tns:amTerminalGruppeStatus>{1,1}</tns:amTerminalGruppeStatus> <tns:amTerminalGruppeTyp>{1,1}</tns:amTerminalGruppeTyp> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> <tns:amTerminal_ID>{1,1}</tns:amTerminal_ID> <tns:amTerminalBezeichnung>{1,1}</tns:amTerminalBezeichnung> <tns:amTerminalZusatzinfo>{1,1}</tns:amTerminalZusatzinfo> <tns:amProduktStatus>{1,1}</tns:amProduktStatus> <tns:amAktLStatus>{1,1}</tns:amAktLStatus> <tns:amAktDLStatus>{1,1}</tns:amAktDLStatus> <tns:amAktLZeitpunkt>{1,1}</tns:amAktLZeitpunkt> <tns:amAktDLZeitpunkt>{1,1}</tns:amAktDLZeitpunkt> </tns:TXAMK></pre>

Source	<pre><xs:element name="TXAMK" type="tns:TXAMK_Type"> <xs:annotation> <xs:documentation>Element: Konfiguration ALISE</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXASAML

Namespace	http://vdv/ka/alise/2
Annotations	Element: Anfordern einer Aktionsliste (PVS)
Diagram	<pre> classDiagram class TXASAML { <<ion:TXAS_Type>> } class ion:TXAS_Type { <<tns:TX_BASE_Type (extension base)>> } class txbase class transSendeAuftrag class transSendeAuftragstyp TXASAML < -- ion:TXAS_Type ion:TXAS_Type < -- txbase ion:TXAS_Type < -- transSendeAuftrag ion:TXAS_Type < -- transSendeAuftragstyp </pre>
Type	tns:TXAS_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXAS_Type
Properties	content: complex
Model	txbase , transSendeAuftrag , transSendeAuftragstyp
Children	transSendeAuftrag, transSendeAuftragstyp, txbase
Instance	<pre><tns:TXASAML xmlns:tns="http://vdv/ka/alise/2"> <txbase>{1,1}</txbase> <transSendeAuftrag>{1,1}</transSendeAuftrag> <transSendeAuftragstyp>{1,1}</transSendeAuftragstyp> </tns:TXASAML></pre>
Source	<pre><xs:element name="TXASAML" type="ion:TXAS_Type"> <xs:annotation> <xs:documentation>Element: Anfordern einer Aktionsliste (PVS)</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXASAMTL

Namespace	http://vdv/ka/alise/2
Annotations	Element: Anfordern einer Terminalaktionsliste (KVPS)
Diagram	<pre> classDiagram class TXASAMTL { <<ion:TXAS_Type>> } class ion:TXAS_Type { <<tns:TX_BASE_Type (extension base)>> } class txbase class transSendeAuftrag class transSendeAuftragstyp TXASAMTL < -- ion:TXAS_Type ion:TXAS_Type < -- txbase ion:TXAS_Type < -- transSendeAuftrag ion:TXAS_Type < -- transSendeAuftragstyp </pre>
Type	tns:TXAS_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXAS_Type
Properties	content: complex
Model	txbase , transSendeAuftrag , transSendeAuftragstyp

Children	transSendeAuftrag, transSendeAuftragstyp, txbase
Instance	<pre><tns:TXASAMTL xmlns:tns="http://vdv/ka/alise/2"> <txbase>{1,1}</txbase> <transSendeAuftrag>{1,1}</transSendeAuftrag> <transSendeAuftragstyp>{1,1}</transSendeAuftragstyp> </tns:TXASAMTL></pre>
Source	<pre><xs:element name="TXASAMTL" type="ion:TXAS_Type"> <xs:annotation> <xs:documentation>Element: Anfordern einer Terminalaktionsliste (KVPS)</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXASAMDL

Namespace	http://vdv/ka/alise/2
Annotations	Element: Anfordern einer Differenz-Aktionsliste (PVS)
Diagram	<pre> classDiagram class TXASAMDL { <<ion:TXAS_Type>> } class TX_BASE_Type { <<ion:TXAS_Type>> <<txbase>> <<transSendeAuftrag>> <<transSendeAuftragstyp>> } class ion:TXAS_Type { <<txbase>> <<transSendeAuftrag>> <<transSendeAuftragstyp>> } TXASAMDL < -- TX_BASE_Type TX_BASE_Type < -- ion:TXAS_Type </pre>
Type	tns:TXAS_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAS_Type
Properties	content: complex
Model	txbase , transSendeAuftrag , transSendeAuftragstyp
Children	transSendeAuftrag, transSendeAuftragstyp, txbase
Instance	<pre><tns:TXASAMDL xmlns:tns="http://vdv/ka/alise/2"> <txbase>{1,1}</txbase> <transSendeAuftrag>{1,1}</transSendeAuftrag> <transSendeAuftragstyp>{1,1}</transSendeAuftragstyp> </tns:TXASAMDL></pre>
Source	<pre><xs:element name="TXASAMDL" type="ion:TXAS_Type"> <xs:annotation> <xs:documentation>Element: Anfordern einer Differenz-Aktionsliste (PVS)</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXASAMTDL

Namespace	http://vdv/ka/alise/2
Annotations	Element: Anfordern einer Differenz-Terminalaktionsliste (KVPS)
Diagram	<pre> classDiagram class TXASAMTDL { <<ion:TXAS_Type>> } class TX_BASE_Type { <<ion:TXAS_Type>> <<txbase>> <<transSendeAuftrag>> <<transSendeAuftragstyp>> } class ion:TXAS_Type { <<txbase>> <<transSendeAuftrag>> <<transSendeAuftragstyp>> } TXASAMTDL < -- TX_BASE_Type TX_BASE_Type < -- ion:TXAS_Type </pre>

Type	tns:TXAS_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXAS_Type
Properties	content: complex
Model	txbase , transSendeAuftrag , transSendeAuftragstyp
Children	transSendeAuftrag, transSendeAuftragstyp, txbase
Instance	<pre><tns:TXASAMTDL xmlns:tns="http://vdv/ka/alise/2"> <txbase>{1,1}</txbase> <transSendeAuftrag>{1,1}</transSendeAuftrag> <transSendeAuftragstyp>{1,1}</transSendeAuftragstyp> </tns:TXASAMTDL></pre>
Source	<pre><xss:element name="TXASAMTDL" type="ion:TXAS_Type"> <xss:annotation> <xss:documentation>Element: Anfordern einer Differenz-Terminalaktionsliste (KVPS)</xss:documentation> </xss:annotation> </xss:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAML

Namespace	http://vdv/ka/alise/2
Annotations	Element: Aktionsliste als Antwort (PVS sendet an KVPS)
Diagram	<pre> classDiagram TXAML "Type tns:TXAML_Type" --> "Base Type ion:TX_BASE_Type" TXAML "Type tns:TXAML_Type" --> "Extension Base ion:TX_BASE_Type" TXAML "Type tns:TXAML_Type" --> "Attribute amListeSender_ID ka:Organisation_ID" TXAML "Type tns:TXAML_Type" --> "Attribute amListeEmpfaenger_ID ka:Organisation_ID" TXAML "Type tns:TXAML_Type" --> "Attribute amListeNummer ct:ReferenceNumberFour" TXAML "Type tns:TXAML_Type" --> "Attribute amListeZeitstempel ct:DateTime" TXAML "Type tns:TXAML_Type" --> "Association txbase" TXAML "Type tns:TXAML_Type" --> "Association txalisber" TXAML "Type tns:TXAML_Type" --> "Association txrlisber" </pre>
Type	tns:TXAML_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXAML_Type
Properties	content: complex
Model	txbase , tns:amListeSender_ID , tns:amListeEmpfaenger_ID , tns:amListeNummer , tns:amListeZeitstempel , (tns:txalisber tns:txrlisber tns:txelisber)
Children	tns:amListeEmpfaenger_ID, tns:amListeNummer, tns:amListeSender_ID, tns:amListeZeitstempel, tns:txalisber, tns:txelisber, tns:txrlisber, txbase
Instance	<pre><tns:TXAML xmlns:tns="http://vdv/ka/alise/2"> <txbase>{1,1}</txbase> <tns:amListeSender_ID>{1,1}</tns:amListeSender_ID> <tns:amListeEmpfaenger_ID>{1,1}</tns:amListeEmpfaenger_ID></pre>

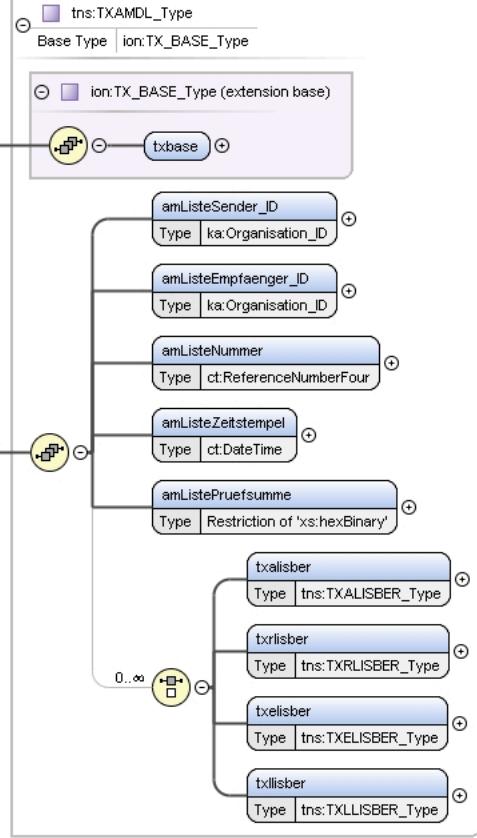
	<pre><tns:amListeNummer>{1,1}</tns:amListeNummer> <tns:amListeZeitstempel>{1,1}</tns:amListeZeitstempel> <tns:txalisber>{1,1}</tns:txalisber> <tns:txrlisber>{1,1}</tns:txrlisber> <tns:txelisber>{1,1}</tns:txelisber> </tns:TXAML></pre>
Source	<pre><xs:element name="TXAML" type="tns:TXAML_Type"> <xs:annotation> <xs:documentation>Element: Aktionsliste als Antwort (PVS sendet an KVPS)</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAMTL

Namespace	http://vdv/ka/alise/2
Annotations	Element: Terminalaktionsliste als Antwort (KVPS)
Diagram	<pre> classDiagram class TXAMTL { <<tns:TXAMTL_Type>> } class amListeSender_ID { <<tns:TXAMTL_Type>> Type ka:Organisation_ID } class amListeEmpfaenger_ID { <<tns:TXAMTL_Type>> Type ka:Organisation_ID } class amListeNummer { <<tns:TXAMTL_Type>> Type ct:ReferenceNumberFour } class amListeZeitstempel { <<tns:TXAMTL_Type>> Type ct:DateTime } class txalisber { <<tns:TXALISBER_Type>> } class txrlisber { <<tns:TXRLISBER_Type>> } class txelisber { <<tns:TXELISBER_Type>> } TXAMTL "0..∞" --> amListeSender_ID TXAMTL "0..∞" --> amListeEmpfaenger_ID TXAMTL "0..∞" --> amListeNummer TXAMTL "0..∞" --> amListeZeitstempel TXAMTL "0..∞" --> txalisber TXAMTL "0..∞" --> txrlisber TXAMTL "0..∞" --> txelisber </pre>
Type	tns:TXAMTL_Type
Properties	content: complex
Model	tns:amListeSender_ID , tns:amListeEmpfaenger_ID , tns:amListeNummer , tns:amListeZeitstempel , (tns:txalisber tns:txrlisber tns:txelisber)
Children	tns:amListeEmpfaenger_ID, tns:amListeNummer, tns:amListeSender_ID, tns:amListeZeitstempel, tns:txalisber, tns:txelisber, tns:txrlisber
Instance	<pre><tns:TXAMTL xmlns:tns="http://vdv/ka/alise/2"> <tns:amListeSender_ID>{1,1}</tns:amListeSender_ID> <tns:amListeEmpfaenger_ID>{1,1}</tns:amListeEmpfaenger_ID> <tns:amListeNummer>{1,1}</tns:amListeNummer> <tns:amListeZeitstempel>{1,1}</tns:amListeZeitstempel> <tns:txalisber>{1,1}</tns:txalisber> <tns:txrlisber>{1,1}</tns:txrlisber> <tns:txelisber>{1,1}</tns:txelisber> </tns:TXAMTL></pre>
Source	<pre><xs:element name="TXAMTL" type="tns:TXAMTL_Type"> <xs:annotation> <xs:documentation>Element: Terminalaktionsliste als Antwort (KVPS)</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

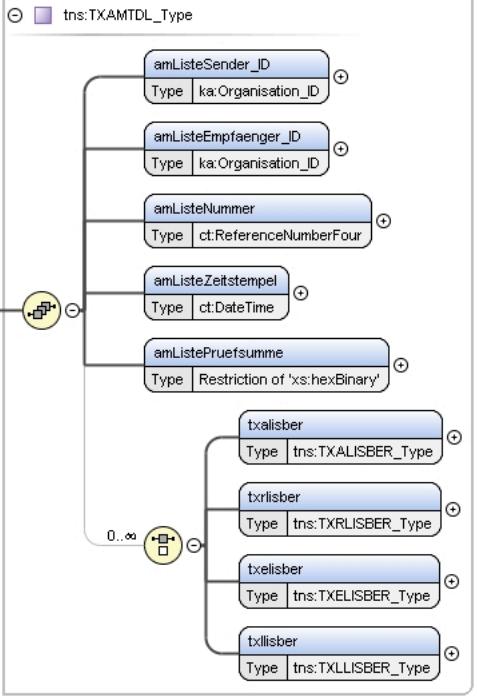
Element tns:TXAMDL

Namespace	http://vdv/ka/alise/2
Annotations	Element: Differenz-Aktionsliste als Antwort (PVS sendet an KVPS)

Diagram	
Type	tns:TXAMDL_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXAMDL_Type
Properties	content: complex
Model	txbase , tns:amListeSender_ID , tns:amListeEmpfaenger_ID , tns:amListeNummer , tns:amListeZeitstempel , tns:amListePruefsumme , (tns:txalisber tns:txrlisber tns:txelisber tns:txllisber)
Children	tns:amListeEmpfaenger_ID, tns:amListeNummer, tns:amListePruefsumme, tns:amListeSender_ID, tns:amListeZeitstempel, tns:txalisber, tns:txelisber, tns:txllisber, tns:txrlisber, txbase
Instance	<pre><tns:TXAMDL xmlns:tns="http://vdv/ka/alise/2"> <txbase>{1,1}</txbase> <tns:amListeSender_ID>{1,1}</tns:amListeSender_ID> <tns:amListeEmpfaenger_ID>{1,1}</tns:amListeEmpfaenger_ID> <tns:amListeNummer>{1,1}</tns:amListeNummer> <tns:amListeZeitstempel>{1,1}</tns:amListeZeitstempel> <tns:amListePruefsumme>{1,1}</tns:amListePruefsumme> <tns:txalisber>{1,1}</tns:txalisber> <tns:txrlisber>{1,1}</tns:txrlisber> <tns:txelisber>{1,1}</tns:txelisber> <tns:txllisber>{1,1}</tns:txllisber> </tns:TXAMDL></pre>
Source	<pre><xs:element name="TXAMDL" type="tns:TXAMDL_Type"> <xs:annotation> <xs:documentation>Element: Differenz-Aktionsliste als Antwort (PVS sendet an KVPS)</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:///C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

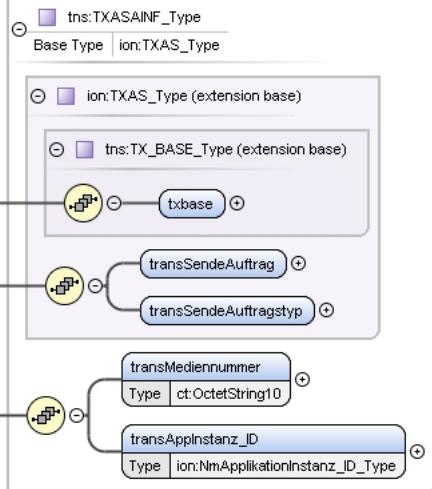
Element tns:TXAMDL

Namespace	http://vdv/ka/alise/2
Annotations	Element: Differenz-Terminalaktionsliste als Antwort (KVPS)

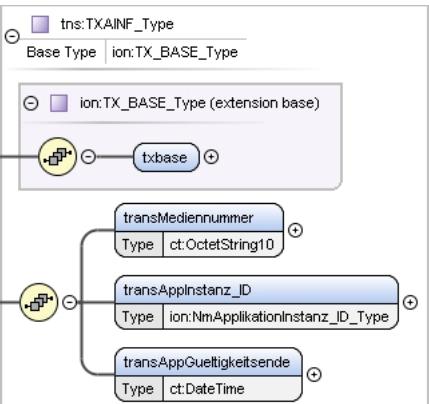
Diagram	
Type	tns:TXAMTDL_Type
Properties	content: complex
Model	tns:amListeSender_ID , tns:amListeEmpfaenger_ID , tns:amListeNummer , tns:amListeZeitstempel , tns:amListePruefsumme , (tns:txalisber tns:txrlisber tns:txelisber tns:txllisber)
Children	tns:amListeEmpfaenger_ID, tns:amListeNummer, tns:amListePruefsumme, tns:amListeSender_ID, tns:amListeZeitstempel, tns:txalisber, tns:txelisber, tns:txllisber, tns:txrlisber
Instance	<pre><tns:TXAMTDL xmlns:tns="http://vdv/ka/alise/2"> <tns:amListeSender_ID>{1,1}</tns:amListeSender_ID> <tns:amListeEmpfaenger_ID>{1,1}</tns:amListeEmpfaenger_ID> <tns:amListeNummer>{1,1}</tns:amListeNummer> <tns:amListeZeitstempel>{1,1}</tns:amListeZeitstempel> <tns:amListePruefsumme>{1,1}</tns:amListePruefsumme> <tns:txalisber>{1,1}</tns:txalisber> <tns:txrlisber>{1,1}</tns:txrlisber> <tns:txelisber>{1,1}</tns:txelisber> <tns:txllisber>{1,1}</tns:txllisber> </tns:TXAMTDL></pre>
Source	<pre><x:element name="TXAMTDL" type="tns:TXAMTDL_Type"> <x:annotation> <x:documentation>Element: Differenz-Terminalaktionsliste als Antwort (KVPS)</x:documentation> </x:annotation> </x:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXASAINF

Namespace	http://vdv/ka/alise/2
Annotations	Element: ALISE Sendeauflorderung zur Applikationsinformation

Diagram	
Type	tns:TXASAINF_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXAS_Type • tns:TXASAINF_Type
Properties	content: complex
Model	txbase , transSendeAuftrag , transSendeAuftragstyp , tns:transMediennummer , tns:transAppInstanz_ID
Children	tns:transAppInstanz_ID, tns:transMediennummer, transSendeAuftrag, transSendeAuftragstyp, txbase
Instance	<pre><tns:TXASAINF xmlns:tns="http://vdv/ka/alise/2"> <txbase>{1,1}</txbase> <transSendeAuftrag>{1,1}</transSendeAuftrag> <transSendeAuftragstyp>{1,1}</transSendeAuftragstyp> <tns:transMediennummer>{1,1}</tns:transMediennummer> <tns:transAppInstanz_ID>{1,1}</tns:transAppInstanz_ID> </tns:TXASAINF></pre>
Source	<pre><xs:element name="TXASAINF" type="tns:TXASAINF_Type"> <xs:annotation> <xs:documentation>Element: ALISE Sendaufforderung zur Applikationsinformation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Element tns:TXAINF

Namespace	http://vdv/ka/alise/2
Annotations	Element: ALISE Applikationsinformationen
Diagram	
Type	tns:TXAINF_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type

	<ul style="list-style-type: none"> • tns:TXAINF_Type
Properties	content: complex
Model	txbase , tns:transMediennummer , tns:transAppInstanz_ID , tns:transAppGueltigkeitsende
Children	tns:transAppGueltigkeitsende, tns:transAppInstanz_ID, tns:transMediennummer, txbase
Instance	<pre><tns:TXAINF xmlns:tns="http://vdv/ka/alise/2"> <txbase>{1,1}</txbase> <tns:transMediennummer>{1,1}</tns:transMediennummer> <tns:transAppInstanz_ID>{1,1}</tns:transAppInstanz_ID> <tns:transAppGueltigkeitsende>{1,1}</tns:transAppGueltigkeitsende> </tns:TXAINF></pre>
Source	<pre><x:element name="TXAINF" type="tns:TXAINF_Type"> <x:annotation> <x:documentation>Element: ALISE Applikationsinformationen</x:documentation> </x:annotation> </x:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Complex Type(s)

Complex Type tns:TerminalGruppe_ID_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: Terminalgruppen Identification
Diagram	<pre> classDiagram class TerminalGruppe_ID_Type { terminalGruppenNummer : ct:ReferenceNumberTwo pv_ID : ka:Organisation_ID } </pre>
Used by	Elements tns:TXAMK_Type/tns:amTerminalGruppe_ID, tns:TX_IDENTAM_Type/tns:amTerminalGruppe_ID
Model	tns:terminalGruppenNummer , tns:pv_ID
Children	tns:pv_ID, tns:terminalGruppenNummer
Source	<pre><x:complexType name="TerminalGruppe_ID_Type"> <x:annotation> <x:documentation>Typ: Terminalgruppen Identification</x:documentation> </x:annotation> <x:sequence> <x:element name="terminalGruppenNummer" type="ct:ReferenceNumberTwo"/> <x:element name="pv_ID" type="ka:Organisation_ID"/> </x:sequence> </x:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Complex Type tns:TX_IDENTAM_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: Aktionsmanagement Information

Diagram	<pre> classDiagram TX_IDENTAM_Type { amTerminalGruppe_ID amTerminal_ID amAenderungsreferenz_ID appInstanz_ID logTransaktionsOperator_ID berBerechtigung_ID prodProdukt_ID prodKeyOrganisation_ID berStatus berSynchronNummer } TX_IDENTAM_Type < --> TXAAUFBER_Type TX_IDENTAM_Type < --> TXALISBER_Type TX_IDENTAM_Type < --> TXEAUFBER_Type TX_IDENTAM_Type < --> TXELISBER_Type TX_IDENTAM_Type < --> TXRAUFBER_Type TX_IDENTAM_Type < --> TXRLISBER_Type </pre>
Used by	Elements tns:TXAAUFBER_Type/tns:tx_identam, tns:TXALISBER_Type/tns:tx_identam, tns:TXEAUFBER_Type/tns:tx_identam, tns:TXELISBER_Type/tns:tx_identam, tns:TXRAUFBER_Type/tns:tx_identam, tns:TXRLISBER_Type/tns:tx_identam
Model	tns:amTerminalGruppe_ID , tns:amTerminal_ID , tns:amAenderungsreferenz_ID , tns:appInstanz_ID , tns:logTransaktionsOperator_ID , tns:berBerechtigung_ID , tns:prodProdukt_ID , tns:prodKeyOrganisation_ID , tns:berStatus , tns:berSynchronNummer
Children	tns:amAenderungsreferenz_ID, tns:amTerminalGruppe_ID, tns:amTerminal_ID, tns:appInstanz_ID, tns:berBerechtigung_ID, tns:berStatus, tns:berSynchronNummer, tns:logTransaktionsOperator_ID, tns:prodKeyOrganisation_ID, tns:prodProdukt_ID
Source	<pre> <xs:complexType name="TX_IDENTAM_Type"> <xs:annotation> <xs:documentation>Typ: Aktionsmanagement Information</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="amTerminalGruppe_ID" type="tns:TerminalGruppe_ID_Type"/> <xs:element name="amTerminal_ID" type="ion:Terminal_ID_Type"/> <xs:element name="amAenderungsreferenz_ID" type="ion:Berechtigung_ID_Type"/> <xs:element name="appInstanz_ID" type="ion:NmApplikationInstanz_ID_Type"/> <xs:element name="logTransaktionsOperator_ID" type="ka:Organisation_ID"/> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/> <xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type"/> <xs:element name="prodKeyOrganisation_ID" type="ka:Organisation_ID"/> <xs:element name="berStatus" type="tns:WertobjektStatus_CODE_Type"/> <xs:element name="berSynchronNummer" type="ct:ReferenceNumberOne"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

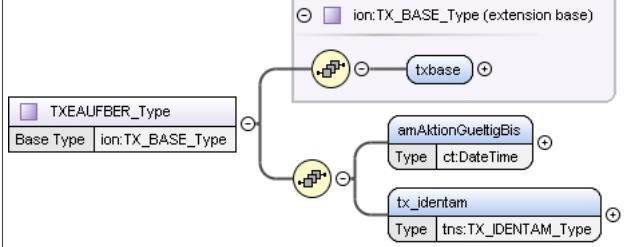
Complex Type tns:TXAAUFBER_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: Aktionsauftrag Berechtigung ausgeben

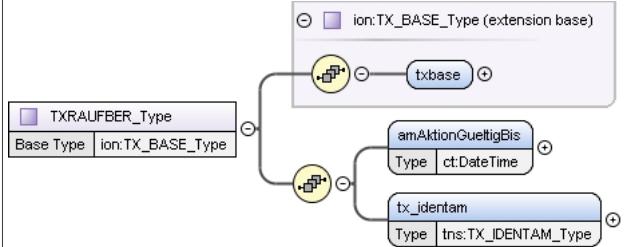
Diagram	<pre> classDiagram ion:TX_BASE_Type < -- TXAAUFBER_Type TXAAUFBER_Type { amAktionGueltigBis : ct:DateTime berInfoText : xs:string amMKPV-NM-MAC_ID : ion:SymSchlüssel_ID_Type amMKKVP-NM-MAC_ID : ion:SymSchlüssel_ID_Type amMKERF-NM-MAC_ID : ion:SymSchlüssel_ID_Type tx_ber : ion:TX_BER_Type tx_identam : tns:TX_IDENTAM_Type berProduktspezTeil : xs:hexBinary ZusatzdatenTarifbereich : xs:hexBinary } </pre>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type <ul style="list-style-type: none"> tns:TXAAUFBER_Type
Used by	Element tns:TXAAUFBER
Model	txbase , tns:amAktionGueltigBis , tns:berInfoText , tns:amMKPV-NM-MAC_ID , tns:amMKKVP-NM-MAC_ID , tns:amMKERF-NM-MAC_ID , tns:tx_ber , tns:tx_identam , tns:berProduktspezTeil , tns:ZusatzdatenTarifbereich
Children	tns:ZusatzdatenTarifbereich, tns:amAktionGueltigBis, tns:amMKERF-NM-MAC_ID, tns:amMKKVP-NM-MAC_ID, tns:amMKPV-NM-MAC_ID, tns:berInfoText, tns:berProduktspezTeil, tns:tx_ber, tns:tx_identam, txbase
Source	<pre> <xss:complexType name="TXAAUFBER_Type"> <xss:annotation> <xss:documentation>Typ: Aktionsauftrag Berechtigung ausgeben</xss:documentation> </xss:annotation> <xss:complexContent> <xss:extension base="ion:TX_BASE_Type"> <xss:sequence> <xss:element name="amAktionGueltigBis" type="ct:DateTime"/> <xss:element name="berInfoText" type="xs:string"/> <xss:element name="amMKPV-NM-MAC_ID" type="ion:SymSchlüssel_ID_Type"/> <xss:element name="amMKKVP-NM-MAC_ID" type="ion:SymSchlüssel_ID_Type"/> <xss:element name="amMKERF-NM-MAC_ID" type="ion:SymSchlüssel_ID_Type"/> <xss:element name="tx_ber" type="ion:TX_BER_Type"/> <xss:element name="tx_identam" type="tns:TX_IDENTAM_Type"/> <xss:element name="berProduktspezTeil" type="xs:hexBinary"/> <xss:element name="ZusatzdatenTarifbereich" type="xs:hexBinary"/> </xss:sequence> </xss:extension> </xss:complexContent> </xss:complexType> </pre>
Schema location	file:///C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Complex Type tns:TXEAUFBER_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: Aktionsauftrag Entsperrung Berechtigung

Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXEAUFBER_Type
Used by	Element tns:TXEAUFBER
Model	txbase , tns:amAktionGueltigBis , tns:tx_identam
Children	tns:amAktionGueltigBis, tns:tx_identam, txbase
Source	<pre><xs:complexType name="TXEAUFBER_Type"> <xs:annotation> <xs:documentation>Typ: Aktionsauftrag Ruecknahme Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="amAktionGueltigBis" type="ct:DateTime"/> <xs:element name="tx_identam" type="tns:TX_IDENTAM_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Complex Type tns:TXRAUFBER_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: Aktionsauftrag Ruecknahme Berechtigung
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXRAUFBER_Type
Used by	Element tns:TXRAUFBER
Model	txbase , tns:amAktionGueltigBis , tns:tx_identam
Children	tns:amAktionGueltigBis, tns:tx_identam, txbase
Source	<pre><xs:complexType name="TXRAUFBER_Type"> <xs:annotation> <xs:documentation>Typ: Aktionsauftrag Ruecknahme Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="amAktionGueltigBis" type="ct:DateTime"/> <xs:element name="tx_identam" type="tns:TX_IDENTAM_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd
-----------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------

Complex Type tns:TXAFREIBER_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: Aktionsfreigabeauftrag
Diagram	<pre> classDiagram TXAFREIBER_Type < -- TX_BASE_Type TXAFREIBER_Type "0..1" --> berBerechtigung_ID : ion:Berechtigung_ID_Type TXAFREIBER_Type "0..1" --> berSynchronNummer : ct:ReferenceNumberOne TX_BASE_Type "0..1" --> txbase : ion:TX_BASE_Type </pre>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXAFREIBER_Type
Used by	Element tns:TXAFREIBER
Model	txbase , tns:berBerechtigung_ID , tns:berSynchronNummer
Children	tns:berBerechtigung_ID, tns:berSynchronNummer, txbase
Source	<pre> <xss:complexType name="TXAFREIBER_Type"> <xss:annotation> <xss:documentation>Typ: Aktionsfreigabeauftrag</xss:documentation> </xss:annotation> <xss:complexContent> <xss:extension base="ion:TX_BASE_Type"> <xss:sequence> <xss:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/> <xss:element name="berSynchronNummer" type="ct:ReferenceNumberOne"/> </xss:sequence> </xss:extension> </xss:complexContent> </xss:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Complex Type tns:TXAFREIMITBER_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: Aktionsfreigabemitteilung
Diagram	<pre> classDiagram TXAFREIMITBER_Type < -- TX_BASE_Type TXAFREIMITBER_Type "0..1" --> berBerechtigung_ID : ion:Berechtigung_ID_Type TXAFREIMITBER_Type "0..1" --> berSynchronNummer : ct:ReferenceNumberOne TX_BASE_Type "0..1" --> txbase : ion:TX_BASE_Type </pre>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXAFREIMITBER_Type
Used by	Element tns:TXAFREIMITBER
Model	txbase , tns:berBerechtigung_ID , tns:berSynchronNummer
Children	tns:berBerechtigung_ID, tns:berSynchronNummer, txbase
Source	<pre> <xss:complexType name="TXAFREIMITBER_Type"> <xss:annotation> </xss:annotation> <xss:complexContent> <xss:extension base="ion:TX_BASE_Type"> <xss:sequence> <xss:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/> <xss:element name="berSynchronNummer" type="ct:ReferenceNumberOne"/> </xss:sequence> </xss:extension> </xss:complexContent> </xss:complexType> </pre>

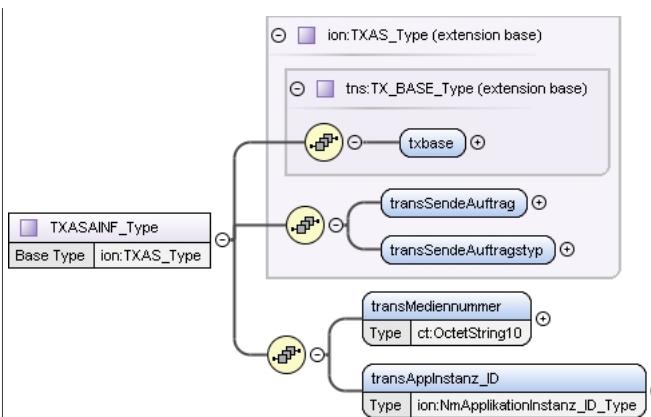
	<pre> <xs:documentation>Typ: Aktionsfreigabemitteilung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type" /> <xs:element name="berSynchronNummer" type="ct:ReferenceNumberOne" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Complex Type tns:TXAINF_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: ALISE Applikationsinformationen
Diagram	<pre> classDiagram TXAINF_Type < -- ion:TX_BASE_Type TXAINF_Type { -transMediennummer : ct:OctetString10 -transAppInstanz_ID : ion:NmApplikationInstanz_ID_Type -transAppGueltigkeitsende : ct:DateTime } </pre>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXAINF_Type
Used by	Element tns:TXAINF
Model	txbase , tns:transMediennummer , tns:transAppInstanz_ID , tns:transAppGueltigkeitsende
Children	tns:transAppGueltigkeitsende, tns:transAppInstanz_ID, tns:transMediennummer, txbase
Source	<pre> <xs:complexType name="TXAINF_Type"> <xs:annotation> <xs:documentation>Typ: ALISE Applikationsinformationen</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="transMediennummer" type="ct:OctetString10" /> <xs:element name="transAppInstanz_ID" type="ion:NmApplikationInstanz_ID_Type" /> <xs:element name="transAppGueltigkeitsende" type="ct:DateTime" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Complex Type tns:TXASAINF_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: ALISE Applikationsinformationen Anforderung

Diagram	
Type	extension of tns:TXAS_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXAS_Type • tns:TXASINF_Type
Used by	Element tns:TXASAINF
Model	txbase , transSendeAuftrag , transSendeAuftragstyp , tns:transMediennummer , tns:transAppInstanz_ID
Children	tns:transAppInstanz_ID, tns:transMediennummer, transSendeAuftrag, transSendeAuftragstyp, txbase
Source	<pre><xs:complexType name="TXASINF_Type"> <xs:annotation> <xs:documentation>Typ: ALISE Applikationsinformationen Anforderung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TXAS_Type"> <xs:sequence> <xs:element name="transMediennummer" type="ct:OctetString10" nillable="true"/> <xs:element name="transAppInstanz_ID" type="ion:NmApplikationInstanz_ID_Type" nillable="true"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Complex Type tns:TXAMI_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: Aktionsliste (Vollliste) ALISE

Diagram	<pre> classDiagram ion::TX_BASE_Type < -- TXAML_Type TXAML_Type { amListeSender_ID : ka::Organisation_ID amListeEmpfaenger_ID : ka::Organisation_ID amListeNummer : ct::ReferenceNumberFour amListeZeitstempel : ct::DateTime 0..> txalisber : tns::TXALISBER_Type 0..> txrlisber : tns::TXRLISBER_Type 0..> txelisber : tns::TXELISBER_Type } TXAML_Type < -- ion::TX_BASE_Type </pre>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type <ul style="list-style-type: none"> • tns:TXAML_Type
Used by	Element tns:TXAML
Model	txbase , tns:amListeSender_ID , tns:amListeEmpfaenger_ID , tns:amListeNummer , tns:amListeZeitstempel , (tns:txalisber tns:txrlisber tns:txelisber)
Children	tns:amListeEmpfaenger_ID, tns:amListeNummer, tns:amListeSender_ID, tns:amListeZeitstempel, tns:txalisber, tns:txelisber, tns:txrlisber, txbase
Source	<pre> <xss:complexType name="TXAML_Type"> <xss:annotation> <xss:documentation>Typ: Aktionsliste (Vollliste) ALISE</xss:documentation> </xss:annotation> <xss:complexContent> <xss:extension base="ion:TX_BASE_Type"> <xss:sequence> <xss:element name="amListeSender_ID" type="ka:Organisation_ID"/> <xss:element name="amListeEmpfaenger_ID" type="ka:Organisation_ID"/> <xss:element name="amListeNummer" type="ct:ReferenceNumberFour"/> <xss:element name="amListeZeitstempel" type="ct:DateTime"/> <xss:choice minOccurs="0" maxOccurs="unbounded"> <xss:element name="txalisber" type="tns:TXALISBER_Type"/> <xss:element name="txrlisber" type="tns:TXRLISBER_Type"/> <xss:element name="txelisber" type="tns:TXELISBER_Type"/> </xss:choice> </xss:sequence> </xss:extension> </xss:complexContent> </xss:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Complex Type tns:TXALISBER_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: Ausgabe EFS-Berechtigung

Diagram	<pre> classDiagram TXALISBER_Type { amAuftragsTyp logTransaktionsTyp berInfoText amMKPV-NM-MAC_ID amMKKVP-NM-MAC_ID amMKERF-NM-MAC_ID tx_ber tx_identam berProduktspezTeil } TXALISBER_Type < --> amAuftragsTyp TXALISBER_Type < --> logTransaktionsTyp TXALISBER_Type < --> berInfoText TXALISBER_Type < --> amMKPV-NM-MAC_ID TXALISBER_Type < --> amMKKVP-NM-MAC_ID TXALISBER_Type < --> amMKERF-NM-MAC_ID TXALISBER_Type < --> tx_ber TXALISBER_Type < --> tx_identam TXALISBER_Type < --> berProduktspezTeil </pre>
Used by	Elements tns:TXAMDL_Type/tns:txalisber, tns:TXAML_Type/tns:txalisber, tns:TXAMTDL_Type/tns:txalisber, tns:TXAMTL_Type/tns:txalisber
Model	tns:amAuftragsTyp , tns:logTransaktionsTyp , tns:berInfoText , tns:amMKPV-NM-MAC_ID , tns:amMKKVP-NM-MAC_ID , tns:amMKERF-NM-MAC_ID , tns:tx_ber , tns:tx_identam , tns:berProduktspezTeil
Children	tns:amAuftragsTyp, tns:amMKERF-NM-MAC_ID, tns:amMKKVP-NM-MAC_ID, tns:amMKPV-NM-MAC_ID, tns:berInfoText, tns:berProduktspezTeil, tns:logTransaktionsTyp, tns:tx_ber, tns:tx_identam
Source	<pre> <x:complexType name="TXALISBER_Type"> <x:annotation> <x:documentation>Typ: Rueckgabe EFS-Berechtigung</x:documentation> </x:annotation> <x:sequence> <x:element name="amAuftragsTyp" type="ion:AuftragsTyp_CODE"/> <x:element name="logTransaktionsTyp" type="ion:NmTransaktionsTyp_CODE"/> <x:element name="berInfoText" type="xs:string"/> <x:element name="amMKPV-NM-MAC_ID" type="ion:SymSchluesel_ID_Type"/> <x:element name="amMKKVP-NM-MAC_ID" type="ion:SymSchluesel_ID_Type"/> <x:element name="amMKERF-NM-MAC_ID" type="ion:SymSchluesel_ID_Type"/> <x:element name="tx_ber" type="ion:TX_BER_Type"/> <x:element name="tx_identam" type="tns:TX_IDENTAM_Type"/> <x:element name="berProduktspezTeil" type="xs:hexBinary"/> </x:sequence> </x:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Complex Type tns:TXRLISBER_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: Rueckgabe EFS-Berechtigung
Diagram	<pre> classDiagram TXRLISBER_Type { amAuftragsTyp logTransaktionsTyp tx_identam } TXRLISBER_Type < --> amAuftragsTyp TXRLISBER_Type < --> logTransaktionsTyp TXRLISBER_Type < --> tx_identam </pre>
Used by	Elements tns:TXAMDL_Type/tns:txrlisber, tns:TXAML_Type/tns:txrlisber, tns:TXAMTDL_Type/tns:txrlisber, tns:TXAMTL_Type/tns:txrlisber
Model	tns:amAuftragsTyp , tns:logTransaktionsTyp , tns:tx_identam
Children	tns:amAuftragsTyp, tns:logTransaktionsTyp, tns:tx_identam
Source	<pre> <x:complexType name="TXRLISBER_Type"> <x:annotation> <x:documentation>Typ: Rueckgabe EFS-Berechtigung</x:documentation> </x:annotation> <x:sequence> <x:element name="amAuftragsTyp" type="ion:AuftragsTyp_CODE"/> <x:element name="logTransaktionsTyp" type="ion:NmTransaktionsTyp_CODE"/> <x:element name="tx_identam" type="tns:TX_IDENTAM_Type"/> </x:sequence> </x:complexType> </pre>

	<pre> <xs:annotation> <xs:documentation>Typ: Rueckgabe EFS-Berechtigung</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="amAuftragsTyp" type="ion:AuftragsTyp_CODE"/> <xs:element name="logTransaktionsTyp" type="ion:NmTransaktionsTyp_CODE"/> <xs:element name="tx_identam" type="tns:TX_IDENTAM_Type"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Complex Type tns:TXELISBER_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: Entsperrung EFS-Berechtigung
Diagram	<pre> classDiagram TXELISBER_Type { amAuftragsTyp logTransaktionsTyp tx_identam } TXELISBER_Type < -- TXAMDL_Type TXELISBER_Type < -- TXAML_Type TXELISBER_Type < -- TXAMTDL_Type TXELISBER_Type < -- TXAMTL_Type TXELISBER_Type < -- TXALISBER_Type TXELISBER_Type < -- TXRLISBER_Type TXELISBER_Type < -- TXEISBER_Type </pre>
Used by	Elements tns:TXAMDL_Type/tns:txelisber, tns:TXAML_Type/tns:txelisber, tns:TXAMTDL_Type/tns:txelisber, tns:TXAMTL_Type/tns:txelisber
Model	tns:amAuftragsTyp, tns:logTransaktionsTyp, tns:tx_identam
Children	tns:amAuftragsTyp, tns:logTransaktionsTyp, tns:tx_identam
Source	<pre> <xs:complexType name="TXELISBER_Type"> <xs:annotation> <xs:documentation>Typ: Entsperrung EFS-Berechtigung</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="amAuftragsTyp" type="ion:AuftragsTyp_CODE"/> <xs:element name="logTransaktionsTyp" type="ion:NmTransaktionsTyp_CODE"/> <xs:element name="tx_identam" type="tns:TX_IDENTAM_Type"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Complex Type tns:TXAMTL_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: Terminalaktionsliste ALISE
Diagram	<pre> classDiagram TXAMTL_Type { amListeSender_ID amListeEmpfaenger_ID amListeNummer amListeZeitstempel txelisber } TXAMTL_Type < -- TXAMDL_Type TXAMTL_Type < -- TXAML_Type TXAMTL_Type < -- TXAMTDL_Type TXAMTL_Type < -- TXALISBER_Type TXAMTL_Type < -- TXRLISBER_Type TXAMTL_Type < -- TXEISBER_Type </pre>
Used by	Element tns:TXAMTL

Model	tns:amListeSender_ID , tns:amListeEmpfaenger_ID , tns:amListeNummer , tns:amListeZeitstempel , (tns:txalisber tns:txrlisber tns:txelisber)
Children	tns:amListeEmpfaenger_ID, tns:amListeNummer, tns:amListeSender_ID, tns:amListeZeitstempel, tns:txalisber, tns:txelisber, tns:txrlisber
Source	<pre><xs:complexType name="TXAMDL_Type"> <xs:annotation> <xs:documentation>Typ: Terminalaktionsliste ALISE</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="amListeSender_ID" type="ka:Organisation_ID"/> <xs:element name="amListeEmpfaenger_ID" type="ka:Organisation_ID"/> <xs:element name="amListeNummer" type="ct:ReferenceNumberFour"/> <xs:element name="amListeZeitstempel" type="ct:DateTime"/> <xs:choice minOccurs="0" maxOccurs="unbounded"> <xs:element name="txalisber" type="tns:TXALISBER_Type"/> <xs:element name="txrlisber" type="tns:TXRLISBER_Type"/> <xs:element name="txelisber" type="tns:TXELISBER_Type"/> </xs:choice> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Complex Type tns:TXAMDL_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: Aktionsdifferenzliste ALISE
Diagram	<pre> classDiagram TXAMDL_Type < -- ion:TX_BASE_Type TXAMDL_Type { amListeSender_ID : ka:Organisation_ID amListeEmpfaenger_ID : ka:Organisation_ID amListeNummer : ct:ReferenceNumberFour amListeZeitstempel : ct:DateTime amListePruefsumme : xs:hexBinary txalisber : tns:TXALISBER_Type txrlisber : tns:TXRLISBER_Type txelisber : tns:TXELISBER_Type txllisber : tns:TXLLISBER_Type } </pre>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAMDL_Type
Used by	Element tns:TXAMDL
Model	txbase , tns:amListeSender_ID , tns:amListeEmpfaenger_ID , tns:amListeNummer , tns:amListeZeitstempel , tns:amListePruefsumme , (tns:txalisber tns:txrlisber tns:txelisber tns:txllisber)
Children	tns:amListeEmpfaenger_ID, tns:amListeNummer, tns:amListePruefsumme, tns:amListeSender_ID, tns:amListeZeitstempel, tns:txalisber, tns:txelisber, tns:txllisber, tns:txrlisber, txbase
Source	<pre><xs:complexType name="TXAMDL_Type"> <xs:annotation></pre>

```

<xs:documentation>Typ: Aktionsdifferenzliste ALISE</xs:documentation>
</xs:annotation>
<xs:complexContent>
  <xs:extension base="ion:TX_BASE_Type">
    <xs:sequence>
      <xs:element name="amListeSender_ID" type="ka:Organisation_ID"/>
      <xs:element name="amListeEmpfaenger_ID" type="ka:Organisation_ID"/>
      <xs:element name="amListeNummer" type="ct:ReferenceNumberFour"/>
      <xs:element name="amListeZeitstempel" type="ct:DateTime"/>
      <xs:element name="amListePruefsumme" nillable="true">
        <xs:simpleType>
          <xs:restriction base="xs:hexBinary">
            <xs:length value="32" fixed="true"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    <xs:choice minOccurs="0" maxOccurs="unbounded">
      <xs:element name="txalisber" type="tns:TXALISBER_Type"/>
      <xs:element name="txrlisber" type="tns:TXRLISBER_Type"/>
      <xs:element name="txelisber" type="tns:TXELISBER_Type"/>
      <xs:element name="txllisber" type="tns:TXLLISBER_Type"/>
    </xs:choice>
    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd
-----------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------

Complex Type tns:TXLLISBER_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: Loeschung des Aktionseintrags
Diagram	<pre> classDiagram class TXLLISBER_Type class amAuftragsTyp { Type ion:AuftragsTyp_CODE } class berBerechtigung_ID { Type ion:Berechtigung_ID_Type } class berSynchronNummer { Type ct:ReferenceNumberOne } TXLLISBER_Type "0..1" -- "1..1" amAuftragsTyp TXLLISBER_Type "0..1" -- "1..1" berBerechtigung_ID TXLLISBER_Type "0..1" -- "1..1" berSynchronNummer </pre>
Used by	Elements tns:TXAMDL_Type/tns:txllisber, tns:TXAMTDL_Type/tns:txllisber
Model	tns:amAuftragsTyp , tns:berBerechtigung_ID , tns:berSynchronNummer
Children	tns:amAuftragsTyp, tns:berBerechtigung_ID, tns:berSynchronNummer
Source	<pre> <xs:complexType name="TXLLISBER_Type"> <xs:annotation> <xs:documentation>Typ: Loeschung des Aktionseintrags</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="amAuftragsTyp" type="ion:AuftragsTyp_CODE"/> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/> <xs:element name="berSynchronNummer" type="ct:ReferenceNumberOne"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Complex Type tns:TXAMTDL_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: Terminalaktionsdifferenzliste ALISE

Diagram	<pre> classDiagram class TXAMTDL_Type { amListeSender_ID amListeEmpfaenger_ID amListeNummer amListeZeitstempel amListePruefsumme txalisber txrlisber txelisber txllisber } amListePruefsumme <--> hexBinary[32] txalisber <--> TXALISBER_Type txrlisber <--> TXRLISBER_Type txelisber <--> TXELISBER_Type txllisber <--> TXLLISBER_Type choice { txalisber txrlisber txelisber txllisber } <--> unbounded </pre>
Used by	Element tns:TXAMTDL
Model	tns:amListeSender_ID , tns:amListeEmpfaenger_ID , tns:amListeNummer , tns:amListeZeitstempel , tns:amListePruefsumme , (tns:txalisber tns:txrlisber tns:txelisber tns:txllisber)
Children	tns:amListeEmpfaenger_ID, tns:amListeNummer, tns:amListePruefsumme, tns:amListeSender_ID, tns:amListeZeitstempel, tns:txalisber, tns:txelisber, tns:txllisber, tns:txrlisber
Source	<pre> <xs:complexType name="TXAMTDL_Type"> <xs:annotation> <xs:documentation>Typ: Terminalaktionsdifferenzliste ALISE</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="amListeSender_ID" type="ka:Organisation_ID"/> <xs:element name="amListeEmpfaenger_ID" type="ka:Organisation_ID"/> <xs:element name="amListeNummer" type="ct:ReferenceNumberFour"/> <xs:element name="amListeZeitstempel" type="ct:DateTime"/> <xs:element name="amListePruefsumme" nillable="true"> <xs:simpleType> <xs:restriction base="xs:hexBinary"> <xs:length value="32" fixed="true"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:choice minOccurs="0" maxOccurs="unbounded"> <xs:element name="txalisber" type="tns:TXALISBER_Type"/> <xs:element name="txrlisber" type="tns:TXRLISBER_Type"/> <xs:element name="txelisber" type="tns:TXELISBER_Type"/> <xs:element name="txllisber" type="tns:TXLLISBER_Type"/> </xs:choice> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd

Complex Type tns:TXAMK_Type

Namespace	http://vdv/ka/alise/2
Annotations	Typ: Konfiguration ALISE

Diagram	<pre> classDiagram TXAMK_Type { amKonfigurationTyp amTerminalGruppe_ID amTerminalGruppeBezeichnung amTerminalGruppeZusatzinfo amTerminalGruppeStatus amTerminalGruppeTyp prodProdukt_ID amTerminal_ID amTerminalBezeichnung amTerminalZusatzinfo amProduktStatus amAktLStatus amAktDLStatus amAktL_Zeitpunkt amAktDL_Zeitpunkt } </pre>
Used by	Element tns:TXAMK
Model	tns:amKonfigurationTyp , tns:amTerminalGruppe_ID , tns:amTerminalGruppeBezeichnung , tns:amTerminalGruppeZusatzinfo , tns:amTerminalGruppeStatus , tns:amTerminalGruppeTyp , tns:prodProdukt_ID , tns:amTerminal_ID , tns:amTerminalBezeichnung , tns:amTerminalZusatzinfo , tns:amProduktStatus , tns:amAktLStatus , tns:amAktDLStatus , tns:amAktLZeitpunkt , tns:amAktDLZeitpunkt
Children	tns:amAktDLStatus, tns:amAktDLZeitpunkt, tns:amAktLStatus, tns:amAktLZeitpunkt, tns:amKonfigurationTyp, tns:amProduktStatus, tns:amTerminalBezeichnung, tns:amTerminalGruppeBezeichnung, tns:amTerminalGruppeStatus, tns:amTerminalGruppeTyp, tns:amTerminalGruppeZusatzinfo, tns:amTerminalGruppe_ID, tns:amTerminalZusatzinfo, tns:amTerminal_ID, tns:prodProdukt_ID
Source	<pre> <xs:complexType name="TXAMK_Type"> <xs:annotation> <xs:documentation>Typ: Konfiguration ALISE</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="amKonfigurationTyp" type="ct:INT1"/> <xs:element name="amTerminalGruppe_ID" type="tns:TerminalGruppe_ID_Type"/> <xs:element name="amTerminalGruppeBezeichnung" type="ion:PrintableString"/> <xs:element name="amTerminalGruppeZusatzinfo" type="ion:PrintableString"/> <xs:element name="amTerminalGruppeStatus" type="xs:boolean"/> <xs:element name="amTerminalGruppeTyp" type="ct:INT1"/> <xs:element name="prodProdukt_ID" type="ion:EFMPProdukt_ID_Type"/> <xs:element name="amTerminal_ID" type="ion:Terminal_ID_Type"/> <xs:element name="amTerminalBezeichnung" type="ion:PrintableString"/> <xs:element name="amTerminalZusatzinfo" type="ion:PrintableString"/> <xs:element name="amProduktStatus" type="xs:boolean"/> <xs:element name="amAktLStatus" type="xs:boolean"/> <xs:element name="amAktDLStatus" type="xs:boolean"/> <xs:element name="amAktLZeitpunkt" type="ct:DateTime"/> <xs:element name="amAktDLZeitpunkt" type="ct:DateTime"/> </xs:sequence> </xs:complexType> </pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd
-----------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------

Simple Type(s)

Simple Type tns:WertobjektStatus_CODE_Type

Namespace	http://vdv/ka/alise/2										
Annotations	BOM 6-65 Der WertobjektStatus_CODE beschreibt den Status eines Wertobjekts der Kernapplikation (APP, AFB, EFS) nach EN 1545 (ProductStatus)										
Diagram											
Type	restriction of tns:INT1										
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT1 • tns:WertobjektStatus_CODE_Type 										
Facets	<table> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> <tr> <td>enumeration</td> <td>7 ausgegeben/entsperrt (EN 1545-1 o.k. (7))</td> </tr> <tr> <td>enumeration</td> <td>19 gesperrt (EN 1545-1 blocked (19))</td> </tr> <tr> <td>enumeration</td> <td>5 zurueckgenommen (EN 1545-1 canceled (5))</td> </tr> </table>	maxInclusive	255	minInclusive	0	enumeration	7 ausgegeben/entsperrt (EN 1545-1 o.k. (7))	enumeration	19 gesperrt (EN 1545-1 blocked (19))	enumeration	5 zurueckgenommen (EN 1545-1 canceled (5))
maxInclusive	255										
minInclusive	0										
enumeration	7 ausgegeben/entsperrt (EN 1545-1 o.k. (7))										
enumeration	19 gesperrt (EN 1545-1 blocked (19))										
enumeration	5 zurueckgenommen (EN 1545-1 canceled (5))										
Used by	Element tns:TX_IDENTAM_Type/tns:berStatus										
Source	<pre> <xs:simpleType name="WertobjektStatus_CODE_Type"> <xs:annotation> <xs:documentation>BOM 6-65 Der WertobjektStatus_CODE beschreibt den Status eines Wertobjekts der Kernapplikation (APP, AFB, EFS) nach EN 1545 (ProductStatus)</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="7"> <xs:annotation> <xs:documentation>ausgegeben/entsperrt (EN 1545-1 o.k. (7))</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="19"> <xs:annotation> <xs:documentation>gesperrt (EN 1545-1 blocked (19))</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>zurueckgenommen (EN 1545-1 canceled (5))</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>										
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/alise/2/XML-Schema_ALISE.xsd										

Namespace: "http://vdv/ka/common/types/2"

Schema(s)

Imported schema XML-Schema_Common_Types.xsd

Namespace	http://vdv/ka/common/types/2						
Properties	<table> <tr> <td>attribute form default:</td> <td>unqualified</td> </tr> <tr> <td>element form default:</td> <td>unqualified</td> </tr> <tr> <td>version:</td> <td>1.11.1</td> </tr> </table>	attribute form default:	unqualified	element form default:	unqualified	version:	1.11.1
attribute form default:	unqualified						
element form default:	unqualified						
version:	1.11.1						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd						

Simple Type(s)

Simple Type tns:ReferenceNumberTwo

Namespace	http://vdv/ka/common/types/2	
Annotations	Integer der den positiven Zahlenraum von zwei Bytes umfasst	
Diagram	<pre> classDiagram class ReferenceNumberTwo { <<Restriction of xs:unsignedInt>> } class tnsINT2 { <<xs:unsignedInt>> } ReferenceNumberTwo < -- tnsINT2 </pre>	
Type	tns:INT2	
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT2 • tns:ReferenceNumberTwo 	
Facets	maxInclusive	65535
	minInclusive	0
Used by	Elements	tns:EFMProdukt_ID_Type/produktNummer, tns:SymSchluessel_ID_Type/schluesellhaber_ID, tns:TerminalGruppe_ID_Type/tns:terminalGruppenNummer, tns:Terminal_ID_Type/terminalIDnummer
	Simple Type	tns:Organisation_ID
Source	<pre> <xssimpleType name="ReferenceNumberTwo"> <xssannotation> <xssdocumentation>Integer der den positiven Zahlenraum von zwei Bytes umfasst</xssdocumentation> </xssannotation> <xssrestriction base="tns:INT2" /> </xssimpleType> </pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd	

Simple Type tns:INT2

Namespace	http://vdv/ka/common/types/2	
Annotations	Integer der den positiven Zahlenraum von zwei Bytes umfasst	
Diagram	<pre> classDiagram class INT2 { <<restriction of xs:unsignedInt>> } class xsunsignedInt { <<xs:unsignedInt>> } INT2 < -- xsunsignedInt </pre>	
Type	restriction of xs:unsignedInt	
Facets	maxInclusive	65535
	minInclusive	0
Used by	Simple Types	tns:ReferenceNumberTwo, tns:SequenceNumberTwo
Source	<pre> <xssimpleType name="INT2"> <xssannotation> <xssdocumentation>Integer der den positiven Zahlenraum von zwei Bytes umfasst</xssdocumentation> </xssannotation> <xssrestriction base="xs:unsignedInt" > <xssminInclusive value="0" /> <xssmaxInclusive value="65535" /> </xssrestriction> </xssimpleType> </pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd	

Simple Type tns:INT1

Namespace	http://vdv/ka/common/types/2	
Annotations	Integer der den positiven Zahlenraum eines Bytes umfasst	
Diagram	<pre> classDiagram class INT1 { <<restriction of xs:unsignedInt>> } class xsunsignedInt { <<xs:unsignedInt>> } INT1 < -- xsunsignedInt </pre>	
Type	restriction of xs:unsignedInt	
Facets	maxInclusive	255
	minInclusive	0
Used by	Simple Types	tns:Abrechnungsverfahren_CODE_Type, tns:AuftragsTyp_CODE, tns:Bezahlart_CODE_Type, tns:CommonServiceresultCode, tns:KommunikationsParterRolle, tns:NmTransaktionsTyp_CODE,

	<p>tns:OrtsTyp_CODE_Type, tns:ReferenceNumberOne, tns:SequenceNumberOne, tns:StatusCode, tns:TerminalTyp_CODE_Type, tns:WertobjektStatus_CODE_Type</p>
Elements	<p>tns:ION_TX_HEADER_Type/transSignaturTyp, tns:ION_TX_HEADER_Type/transStatus, tns:ION_TX_HEADER_Type/transTransaktionsTyp, tns:ION_TX_HEADER_Type/transWiederholungsZaehler, tns:SymSchlussel_ID_Type/schluesseINummer, tns:SymSchlussel_ID_Type/schluesseINumber, tns:TXAMK_Type/tns:amKonfigurationTyp, tns:TXAMK_Type/tns:amTerminalGruppeTyp, tns:TXA_Type/transAblehnungGrund, tns:TX_SANF_Type/sperrSperrgrund</p>
Source	<pre><xs:simpleType name="INT1"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum eines Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0"/> <xs:maxInclusive value="255"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type tns:ReferenceNumberFour

Namespace	http://vdv/ka/common/types/2	
Annotations	Integer der den positiven Zahlenraum von vier Bytes umfasst	
Diagram	<pre> classDiagram class ReferenceNumberFour { <<Restriction of tns:INT4>> } class tns:INT4 ReferenceNumberFour < -- tns:INT4 </pre>	
Type	tns:INT4	
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt <ul style="list-style-type: none"> • tns:INT4 • tns:ReferenceNumberFour 	
Facets	maxInclusive	4294967295
	minInclusive	0
Used by	Elements	tns:Berechtigung_ID_Type/berechtigungNummer, tns:NmApplikationInstanz_ID_Type/NmAppInstanznummer, tns:TXAMDL_Type/tns:amListeNummer, tns:TXAML_Type/tns:amListeNummer, tns:TXAMTDL_Type/tns:amListeNummer, tns:TXAMTL_Type/tns:amListeNummer
Source	<pre><xs:simpleType name="ReferenceNumberFour"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von vier Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT4"/> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd	

Simple Type tns:INT4

Namespace	http://vdv/ka/common/types/2	
Annotations	Integer der den positiven Zahlenraum von vier Bytes umfasst	
Diagram	<pre> classDiagram class INT4 { <<Restriction of xs:unsignedInt>> } class xs:unsignedInt INT4 < -- xs:unsignedInt </pre>	
Type	restriction of xs:unsignedInt	
Facets	maxInclusive	4294967295
	minInclusive	0
Used by	Simple Types	tns:ReferenceNumberFour, tns:SequenceNumberFour, tns:SperrlistenZyklusNummer_Type
Source	<pre><xs:simpleType name="INT4"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von vier Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0"/> <xs:maxInclusive value="4294967295"/> </xs:restriction> </xs:simpleType></pre>	

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd
-----------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Simple Type tns:ReferenceNumberOne

Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum von einem Byte umfasst				
Diagram					
Type	tns:INT1				
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT1 • tns:ReferenceNumberOne 				
Facets	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">maxInclusive</td> <td style="width: 70%;">255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	Elements tns:TXAFREIBER_Type/tns:berSynchronNummer, tns:TXAFREIMITBER_Type/tns:berSynchronNummer, tns:TXLLISBER_Type/tns:berSynchronNummer, tns:TX_IDENTAM_Type/tns:berSynchronNummer				
Source	<pre><xs:simpleType name="ReferenceNumberOne"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von einem Byte umfasst</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT1" /> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type tns:SequenceNumberFour

Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum von vier Bytes umfasst. Fachlich eine aufsteigende Sequenznummer.				
Diagram					
Type	tns:INT4				
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT4 • tns:SequenceNumberFour 				
Facets	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">maxInclusive</td> <td style="width: 70%;">4294967295</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Used by	Element tns:IONTransaktion_ID_Type/transSequenznummer				
Source	<pre><xs:simpleType name="SequenceNumberFour"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von vier Bytes umfasst. Fachlich eine aufsteigende Sequenznummer.</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT4" /> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type tns:DateTime

Namespace	http://vdv/ka/common/types/2
Annotations	Datum mit Uhrzeit (nutzt den Standard)
Diagram	
Type	xs:dateTime

Used by	Elements
	tns:ION_TX_HEADER_Type/transTransaktionsZeitpunkt, tns:TXAAUFBER_Type/tns:amAktionGueltigBis, tns:TXAINF_Type/tns:transAppGueltigkeitsende, tns:TXAMDL_Type/tns:amListeZeitstempel, tns:TXAMK_Type/tns:amAktDLZeitpunkt, tns:TXAMK_Type/tns:amAktLZeitpunkt, tns:TXAML_Type/tns:amListeZeitstempel, tns:TXAMTDL_Type/tns:amListeZeitstempel, tns:TXAM-TL_Type/tns:amListeZeitstempel, tns:TXEAUFBER_Type/tns:amAktionGueltigBis, tns:TXRAUFBER_Type/tns:amAktionGueltigBis
Source	<pre><xs:simpleType name="DateTime"> <xs:annotation> <xs:documentation>Datum mit Uhrzeit (nutzt den Standard)</xs:documentation> </xs:annotation> <xs:restriction base="xs:dateTime" /> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type tns:BitString16

Namespace	http://vdv/ka/common/types/2					
Annotations	String mit Laenge von 16 Zeichen, die nur "0" oder "1" enthalten duerfen					
Diagram	<pre> classDiagram class BitString16 { <<restriction of xs:string>> } class xs:string BitString16 o-- xs:string </pre>					
Type	restriction of xs:string					
Facets	<table> <tr> <td>length</td> <td>16</td> </tr> <tr> <td>pattern</td> <td>[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]</td> </tr> </table>		length	16	pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]
length	16					
pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]					
Used by	Element	tns:ION_TX_HEADER_Type/transVersion				
Source	<pre><xs:simpleType name="BitString16"> <xs:annotation> <xs:documentation>String mit Laenge von 16 Zeichen, die nur "0" oder "1" enthalten duerfen</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="16" fixed="true"/> <xs:pattern value="[0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1]"/> </xs:restriction> </xs:simpleType></pre>					
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd					

Simple Type tns:DateTimeCompact

Namespace	http://vdv/ka/common/types/2					
Annotations	<p>Datum mit Uhrzeit, nutzt den ISO Standard in XML, jedoch wird der Wertebereich eingeschraenkt, so dass ueber eine binaere Darstellung im Nutzermedium 4 Byte ausreichend sind.</p> <p>1990-01-01T:00:00:00 entspricht "keiner Angabe".</p> <p>Der erste gueltige Wert ist 1990-01-02T00:00:02, da angenommen wird, dass DateTimeCompact sich aus DateCompact und TimeCompact (siehe BOM Spez.) zusammensetzt.</p> <p>Achtung: es wird lokale Zeit verwendet (keine Zeitzonen) um ungultige Werte bei Abschneiden einer Zeitzoneninformation zu vermeiden!</p>					
Diagram	<pre> classDiagram class DateTimeCompact { <<restriction of xs:dateTime>> } class xs:dateTime DateTimeCompact o-- xs:dateTime </pre>					
Type	restriction of xs:dateTime					
Facets	<table> <tr> <td>maxInclusive</td> <td>2117-12-31T23:59:58</td> </tr> <tr> <td>minInclusive</td> <td>1990-01-01T00:00:00</td> </tr> </table>		maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58					
minInclusive	1990-01-01T00:00:00					
Used by	Elements	tns:TX_BER_Type/berGueltigkeitsbeginn, tns:TX_BER_Type/berGueltigkeitsende				
Source	<pre><xs:simpleType name="DateTimeCompact"> <xs:annotation> <xs:documentation>Datum mit Uhrzeit, nutzt den ISO Standard in XML, jedoch wird der Wertebereich eingeschraenkt, so dass ueber eine binaere Darstellung im Nutzermedium 4 Byte ausreichend sind.</xs:documentation> </xs:annotation> </xs:simpleType></pre>					

```

1990-01-01T:00:00:00 entspricht "keiner Angabe". Der erste gueltige Wert ist 1990-01-02T00:00:02,
da angenommen wird, dass DateTimeCompact sich aus DateCompact und TimeCompact (siehe BOM Spez.)
zusammensetzt. Achtung: es wird lokale Zeit verwendet (keine Zeitzonen) um ungueltige Werte bei
Abschneiden einer Zeitzoneninformation zu vermeiden!</xs:documentation>
</xs:annotation>
<xs:restriction base="xs:dateTime">
  <xs:minInclusive value="1990-01-01T00:00:00"/>
  <xs:maxInclusive value="2117-12-31T23:59:58"/>
</xs:restriction>
</xs:simpleType>

```

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd
-----------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Simple Type tns:OctetString10

Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 10 Byte (20 Zeichen)
Diagram	
Type	restriction of xs:hexBinary
Facets	length 10
Used by	Elements tns:TXAINF_Type/tns:transMediennummer, tns:TXASAINF_Type/tns:transMediennummer, tns:TX_BER_Type/berBezahlMittel
Source	<pre> <xs:simpleType name="OctetString10"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 10 Byte (20 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="10" fixed="true"/> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type tns:BitString1

Namespace	http://vdv/ka/common/types/2
Annotations	String mit Laenge von 1 Zeichen, das nur "0" oder "1" enthalten darf
Diagram	
Type	restriction of xs:string
Facets	length 1 pattern [0-1]
Source	<pre> <xs:simpleType name="BitString1"> <xs:annotation> <xs:documentation>String mit Laenge von 1 Zeichen, das nur "0" oder "1" enthalten darf</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="1" fixed="true"/> <xs:pattern value="[0-1]"/> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type tns:BitString8

Namespace	http://vdv/ka/common/types/2
Annotations	String mit Laenge von 8 Zeichen, die nur "0" oder "1" enthalten duerfen
Diagram	
Type	restriction of xs:string
Facets	length 8

	pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1]
Source		<pre><xs:simpleType name="BitString8"> <xs:annotation> <xs:documentation>String mit Laenge von 8 Zeichen, die nur "0" oder "1" enthalten duerfen</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="8" fixed="true"/> <xs:pattern value="[0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1]"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd	

Simple Type tns:Date

Namespace	http://vdv/ka/common/types/2	
Annotations	Datum ohne Uhrzeit (nutzt den Standard)	
Diagram	<pre> graph LR Date --> xsdate classDef="umldiagram" </pre>	
Type	xs:date	
Used by	Element TXDEABER_Req_Type/prodAkzeptanzEnde	
Source	<pre><xs:simpleType name="Date"> <xs:annotation> <xs:documentation>Datum ohne Uhrzeit (nutzt den Standard)</xs:documentation> </xs:annotation> <xs:restriction base="xs:date"/> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd	

Simple Type tns:DateCompact

Namespace	http://vdv/ka/common/types/2					
Annotations	<p>Datum ohne Uhrzeit, nutzt den ISO Standard in XML, jedoch wird der Wertebereich eingeschraenkt, so dass ueber eine binaere Darstellung im Nutzermedium 2 Byte ausreichend sind.</p> <p>1990-01-01 entspricht "keiner Angabe". Der erste gueltige Wert ist 1990-01-02 (siehe BOM Spez.).</p>					
Diagram	<pre> graph LR DateCompact --> xsdate classDef="umldiagram" </pre>					
Type	restriction of xs:date					
Facets	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">maxInclusive</td> <td style="width: 70%;">2117-12-31</td> </tr> <tr> <td>minInclusive</td> <td>1990-01-01</td> </tr> </table>		maxInclusive	2117-12-31	minInclusive	1990-01-01
maxInclusive	2117-12-31					
minInclusive	1990-01-01					
Source	<pre><xs:simpleType name="DateCompact"> <xs:annotation> <xs:documentation>Datum ohne Uhrzeit, nutzt den ISO Standard in XML, jedoch wird der Wertebereich eingeschraenkt, so dass ueber eine binaere Darstellung im Nutzermedium 2 Byte ausreichend sind. 1990-01-01 entspricht "keiner Angabe". Der erste gueltige Wert ist 1990-01-02 (siehe BOM Spez.).</xs:documentation> </xs:annotation> <xs:restriction base="xs:date"> <xs:minInclusive value="1990-01-01"/> <xs:maxInclusive value="2117-12-31"/> </xs:restriction> </xs:simpleType></pre>					
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd					

Simple Type tns:Datef

Namespace	http://vdv/ka/common/types/2	
Annotations	<p>BCD codierte Darstellung eines Datums als "Hexstring" in der Form yyyyymmdd. "00000000" ist fuer "keine Angabe". Die Einschraenkung von 00010101 bis 99991231 wie in der BOM gefordert wird ueber das Pattern abgebildet.</p>	

Diagram					
Type	restriction of xs:string				
Facets	<table> <tr> <td>length</td> <td>8</td> </tr> <tr> <td>pattern</td> <td>[0-9][0-9][0-9][0-9][0-1] [0-9][0-3][0-9]</td> </tr> </table>	length	8	pattern	[0-9][0-9][0-9][0-9][0-1] [0-9][0-3][0-9]
length	8				
pattern	[0-9][0-9][0-9][0-9][0-1] [0-9][0-3][0-9]				
Source	<pre><xs:simpleType name="Datef"> <xs:annotation> <xs:documentation>BCD codierte Darstellung eines Datums als "Hexstring" in der Form yyyymmdd. "00000000" ist fuer "keine Angabe". Die Einschraenkung von 00010101 bis 99991231 wie in der BOM gefordert wird ueber das Pattern abgebildet.</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="8" fixed="true"/> <xs:pattern value="[0-9][0-9][0-9][0-9][0-1][0-9][0-3][0-9]"/> </xs:restriction> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type tns:INT3

Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum von drei Bytes umfasst				
Diagram					
Type	restriction of xs:unsignedInt				
Facets	<table> <tr> <td>maxInclusive</td> <td>16777215</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Used by	Simple Types tns:ReferenceNumberThree, tns:SequenceNumberThree				
Source	<pre><xs:simpleType name="INT3"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von drei Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0"/> <xs:maxInclusive value="16777215"/> </xs:restriction> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type tns:OctetString1

Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 1 Byte (2 Zeichen)
Diagram	
Type	restriction of xs:hexBinary
Facets	length 1
Source	<pre><xs:simpleType name="OctetString1"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 1 Byte (2 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="1" fixed="true"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type tns:OctetString4

Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 4 Byte (8 Zeichen)

Diagram	
Type	restriction of xs:hexBinary
Facets	length 4
Source	<pre><xs:simpleType name="OctetString4"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 4 Byte (8 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="4" fixed="true"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type tns:OctetString8

Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 8 Byte (16 Zeichen)
Diagram	
Type	restriction of xs:hexBinary
Facets	length 8
Used by	Elements tns:appNmTransaktionMAC_Type/appMAC_AH, tns:appNmTransaktionMAC_Type/appMAC_KVP, tns:berNmTransaktionMAC_Type/berMAC_KVP, tns:berNmTransaktionMAC_Type/berMAC_PV
Source	<pre><xs:simpleType name="OctetString8"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 8 Byte (16 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="8" fixed="true"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type tns:OctetString12

Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 12 Byte (24 Zeichen)
Diagram	
Type	restriction of xs:hexBinary
Facets	length 12
Used by	Element tns:ASymSchlussel_ID_Type/signaturSchlussel
Source	<pre><xs:simpleType name="OctetString12"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 12 Byte (24 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="12" fixed="true"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type tns:OctetString128

Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 128 Byte (256 Zeichen)
Diagram	

Type	restriction of xs:hexBinary	
Facets	length 128	
Source	<pre><xs:simpleType name="OctetString128"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 128 Byte (256 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="128" fixed="true"/> </xs:restriction> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd	

Simple Type tns:OctetString200

Namespace	http://vdv/ka/common/types/2	
Annotations	Hexstring mit einer maximalen Laenge von 200 Byte (400 Zeichen)	
Diagram	<pre> classDiagram class OctetString200 { <<restriction of xs:hexBinary>> } class xs:hexBinary OctetString200 o-- xs:hexBinary </pre>	
Type	restriction of xs:hexBinary	
Facets	length 200	
Source	<pre><xs:simpleType name="OctetString200"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 200 Byte (400 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="200" fixed="true"/> </xs:restriction> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd	

Simple Type tns:ReferenceNumberThree

Namespace	http://vdv/ka/common/types/2					
Annotations	Integer der den positiven Zahlenraum von drei Bytes umfasst					
Diagram	<pre> classDiagram class ReferenceNumberThree { <<restriction of tns:INT3>> } class tns:INT3 ReferenceNumberThree o-- tns:INT3 </pre>					
Type	tns:INT3					
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT3 • tns:ReferenceNumberThree 					
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>16777215</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>		maxInclusive	16777215	minInclusive	0
maxInclusive	16777215					
minInclusive	0					
Used by	<table border="1"> <tr> <td>Element</td> <td>tns:Ort_ID_Type/ortNummer</td> </tr> <tr> <td>Simple Type</td> <td>tns:SAM_ID_Type</td> </tr> </table>		Element	tns:Ort_ID_Type/ortNummer	Simple Type	tns:SAM_ID_Type
Element	tns:Ort_ID_Type/ortNummer					
Simple Type	tns:SAM_ID_Type					
Source	<pre><xs:simpleType name="ReferenceNumberThree"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von drei Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT3"/> </xs:simpleType></pre>					
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd					

Simple Type tns:SequenceNumberOne

Namespace	http://vdv/ka/common/types/2	
Annotations	Integer der den positiven Zahlenraum von einem Byte umfasst Fachlich eine aufsteigende Sequenznummer.	

Diagram					
Type	tns:INT1				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:SequenceNumberOne 				
Facets	<table> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<pre><xs:simpleType name="SequenceNumberOne"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von einem Byte umfasst Fachlich eine aufsteigende Sequenznummer.</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT1" /> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type tns:SequenceNumberTwo

Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum von zwei Bytes umfasst Fachlich eine aufsteigende Sequenznummer.				
Diagram					
Type	tns:INT2				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:SequenceNumberTwo 				
Facets	<table> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<pre><xs:simpleType name="SequenceNumberTwo"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von zwei Bytes umfasst Fachlich eine aufsteigende Sequenznummer.</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT2" /> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type tns:SequenceNumberThree

Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum von drei Bytes umfasst Fachlich eine aufsteigende Sequenznummer.				
Diagram					
Type	tns:INT3				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:SequenceNumberThree 				
Facets	<table> <tr> <td>maxInclusive</td> <td>16777215</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Source	<pre><xs:simpleType name="SequenceNumberThree"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von drei Bytes umfasst Fachlich eine aufsteigende Sequenznummer.</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT3" /> </xs:simpleType></pre>				

	</xs:simpleType>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Namespace: "http://vdv/ka/common/2"

Schema(s)

Imported schema XML-Schema_KA_Common.xsd

Namespace	http://vdv/ka/common/2
Properties	attribute form default: unqualified element form default: unqualified version: 1.11.1
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd

Element(s)

Element tns:vx

Namespace	http://vdv/ka/common/2
Annotations	KA VX Nachricht Eine VX Nachricht wird bei einer asynchronen Anwendungskommunikation als Bestaetigung einer Dienstanfrage gesendet. Durch die VX Nachricht wird dem anfragenden System der Status der initialen Datenuebermittlung mitgeteilt.
Diagram	<pre> classDiagram class VX_Message_Type { StatusCode StatusText } VX < -- VX_Message_Type </pre>
Type	tns:VX_Message_Type
Properties	content: complex
Model	StatusCode , StatusText
Children	StatusCode, StatusText
Instance	<tns:VX xmlns:tns="http://vdv/ka/common/2"> <StatusCode>{1,1}</StatusCode> <StatusText>{1,1}</StatusText> </tns:VX>
Source	<xs:element name="VX" type="tns:VX_Message_Type"> <xs:annotation> <xs:documentation>KA VX Nachricht Eine VX Nachricht wird bei einer asynchronen Anwendungskommunikation als Bestaetigung einer Dienstanfrage gesendet. Durch die VX Nachricht wird dem anfragenden System der Status der initialen Datenuebermittlung mitgeteilt.</xs:documentation> </xs:annotation> </xs:element>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd

Simple Type(s)

Simple Type tns:organisation_ID

Namespace	http://vdv/ka/common/2
Annotations	Type: Eindeutiger Identifier einer Organisation
Diagram	<pre> classDiagram class Organisation_ID class ct:ReferenceNumberTwo Organisation_ID --> ct:ReferenceNumberTwo </pre>
Type	tns:ReferenceNumberTwo
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT2 • tns:ReferenceNumberTwo

		<ul style="list-style-type: none"> • tns:Organisation_ID
Facets	maxInclusive	65535
	minInclusive	0
Used by	Elements	tns:Berechtigung_ID_Type/kvp_ID, tns:EFMProdukt_ID_Type/organisationID, tns:IONTransaktion_ID_Type/transSender_ID, tns:ION_TX_HEADER_Type/transEmpfaenger_ID, tns:NmApplikationInstanz_ID_Type/kvp_ID, tns:Ort_ID_Type/ortDomaene_ID, tns:TXAMDL_Type/tns:amListeEmpfaenger_ID, tns:TXAMDL_Type/tns:amListeSender_ID, tns:TXAML_Type/tns:amListeEmpfaenger_ID, tns:TXAML_Type/tns:amListeSender_ID, tns:TXAMTDL_Type/tns:amListeEmpfaenger_ID, tns:TXAMTDL_Type/tns:amListeSender_ID, tns:TXAMTL_Type/tns:amListeEmpfaenger_ID, tns:TXAMTL_Type/tns:amListeSender_ID, tns:TXSNAWA_Req_Type/orgSperrkandidat, tns:TXSNAWB_Req_Type/orgSperrkandidat, tns:TX_IDENTAM_Type/tns:prodKeyOrganisation_ID, tns:TerminalGruppe_ID_Type/tns:pv_ID, tns:Terminal_ID_Type/terminalOwner_ID
Source	<pre><xs:simpleType name="Organisation_ID"> <xs:annotation> <xs:documentation>Type: Eindeutiger Identifier einer Organisation</xs:documentation> </xs:annotation> <xs:restriction base="ct:ReferenceNumberTwo" /> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd	

Simple Type tns:KommunikationsParterRolle

Namespace	http://vdv/ka/common/2																										
Annotations	Rolle des Kommunikationspartners: 1=KVP, 2=DL, 3=PV, 4=AH, 5=KOSES																										
Diagram																											
Type	restriction of tns:INT1																										
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT1 • tns:KommunikationsParterRolle 																										
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> <tr> <td>enumeration</td> <td>0</td> <td>Unbekannt</td> </tr> <tr> <td>enumeration</td> <td>1</td> <td>KVP</td> </tr> <tr> <td>enumeration</td> <td>2</td> <td>DL</td> </tr> <tr> <td>enumeration</td> <td>3</td> <td>PV</td> </tr> <tr> <td>enumeration</td> <td>4</td> <td>AH</td> </tr> <tr> <td>enumeration</td> <td>5</td> <td>KOSES</td> </tr> <tr> <td>enumeration</td> <td>254</td> <td>ZVM</td> </tr> </table>		maxInclusive	255	minInclusive	0	enumeration	0	Unbekannt	enumeration	1	KVP	enumeration	2	DL	enumeration	3	PV	enumeration	4	AH	enumeration	5	KOSES	enumeration	254	ZVM
maxInclusive	255																										
minInclusive	0																										
enumeration	0	Unbekannt																									
enumeration	1	KVP																									
enumeration	2	DL																									
enumeration	3	PV																									
enumeration	4	AH																									
enumeration	5	KOSES																									
enumeration	254	ZVM																									
Used by	Elements	tns:IONTransaktion_ID_Type/transSenderRolle, tns:ION_TX_HEADER_Type/transEmpfaengerRolle																									
Source	<pre><xs:simpleType name="KommunikationsParterRolle"> <xs:annotation> <xs:documentation>Rolle des Kommunikationspartners: 1=KVP, 2=DL, 3=PV, 4=AH, 5=KOSES</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1" > <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Unbekannt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>KVP</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>DL</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>																										

	<pre> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>PV</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation>AH</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>KOSES</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="254"> <xs:annotation> <xs:documentation>ZVM</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd

Simple Type tns:StatusCode

Namespace	http://vdv/ka/common/2																																		
Annotations	Status Codes einer KA VX Nachricht (Bestaetigung der ZVM fuer asynchrone Nachrichten)																																		
Diagram	<pre> classDiagram class StatusCode class ctINT1 StatusCode < -- ctINT1 </pre>																																		
Type	restriction of tns:INT1																																		
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT1 • tns:StatusCode 																																		
Facets	<table> <tr> <td>maxInclusive</td> <td>255</td> <td></td> </tr> <tr> <td>minInclusive</td> <td>0</td> <td></td> </tr> <tr> <td>enumeration</td> <td>0</td> <td>Die Nachricht wurde erfolgreich entgegengenommen und alle notwendigen Informationen zur Weiterleitung liegen vor.</td> </tr> <tr> <td>enumeration</td> <td>1</td> <td>Ungueltige Nachricht. Die Sender ID oder die Routing Information kann nicht aus dem SOAP Header extrahiert werden.</td> </tr> <tr> <td>enumeration</td> <td>2</td> <td>Ungleiche Sender ID. Die Sender ID, die im SOAP Header uebertragen wurde passt nicht zu der Sender ID, die in der VM zum Zertifikat des Senders hinterlegt wurde.</td> </tr> <tr> <td>enumeration</td> <td>3</td> <td>Unbekannter oder gesperrter Empfaenger oder zu den Routing Informationen ist in der VM keine technische Empfaengeradresse hinterlegt.</td> </tr> <tr> <td>enumeration</td> <td>4</td> <td>Verbindungsproblem zum Empfaenger. Es konnte keine Verbindung zum Empfaenger aufgebaut werden.</td> </tr> <tr> <td>enumeration</td> <td>5</td> <td>Timeout. Der Empfaenger antwortet nicht in einer vorgegebenen Zeit.</td> </tr> <tr> <td>enumeration</td> <td>6</td> <td>Die asynchrone Nachricht kann nicht zwischengespeichert werden.</td> </tr> <tr> <td>enumeration</td> <td>7</td> <td>Die Organisations-ID des Senders ist gesperrt oder der Vermittlungsstelle nicht bekannt.</td> </tr> <tr> <td>enumeration</td> <td>255</td> <td>Technisches Problem. Es liegt ein technisches Problem vor. Die Nachricht konnte nicht erfolgreich entgegengenommen werden.</td> </tr> </table>		maxInclusive	255		minInclusive	0		enumeration	0	Die Nachricht wurde erfolgreich entgegengenommen und alle notwendigen Informationen zur Weiterleitung liegen vor.	enumeration	1	Ungueltige Nachricht. Die Sender ID oder die Routing Information kann nicht aus dem SOAP Header extrahiert werden.	enumeration	2	Ungleiche Sender ID. Die Sender ID, die im SOAP Header uebertragen wurde passt nicht zu der Sender ID, die in der VM zum Zertifikat des Senders hinterlegt wurde.	enumeration	3	Unbekannter oder gesperrter Empfaenger oder zu den Routing Informationen ist in der VM keine technische Empfaengeradresse hinterlegt.	enumeration	4	Verbindungsproblem zum Empfaenger. Es konnte keine Verbindung zum Empfaenger aufgebaut werden.	enumeration	5	Timeout. Der Empfaenger antwortet nicht in einer vorgegebenen Zeit.	enumeration	6	Die asynchrone Nachricht kann nicht zwischengespeichert werden.	enumeration	7	Die Organisations-ID des Senders ist gesperrt oder der Vermittlungsstelle nicht bekannt.	enumeration	255	Technisches Problem. Es liegt ein technisches Problem vor. Die Nachricht konnte nicht erfolgreich entgegengenommen werden.
maxInclusive	255																																		
minInclusive	0																																		
enumeration	0	Die Nachricht wurde erfolgreich entgegengenommen und alle notwendigen Informationen zur Weiterleitung liegen vor.																																	
enumeration	1	Ungueltige Nachricht. Die Sender ID oder die Routing Information kann nicht aus dem SOAP Header extrahiert werden.																																	
enumeration	2	Ungleiche Sender ID. Die Sender ID, die im SOAP Header uebertragen wurde passt nicht zu der Sender ID, die in der VM zum Zertifikat des Senders hinterlegt wurde.																																	
enumeration	3	Unbekannter oder gesperrter Empfaenger oder zu den Routing Informationen ist in der VM keine technische Empfaengeradresse hinterlegt.																																	
enumeration	4	Verbindungsproblem zum Empfaenger. Es konnte keine Verbindung zum Empfaenger aufgebaut werden.																																	
enumeration	5	Timeout. Der Empfaenger antwortet nicht in einer vorgegebenen Zeit.																																	
enumeration	6	Die asynchrone Nachricht kann nicht zwischengespeichert werden.																																	
enumeration	7	Die Organisations-ID des Senders ist gesperrt oder der Vermittlungsstelle nicht bekannt.																																	
enumeration	255	Technisches Problem. Es liegt ein technisches Problem vor. Die Nachricht konnte nicht erfolgreich entgegengenommen werden.																																	
Used by	Element	tns:VX_Message_Type/StatusCode																																	
Source	<pre> <xs:simpleType name="StatusCode"> <xs:annotation> <xs:documentation>Status Codes einer KA VX Nachricht (Bestaetigung der ZVM fuer asynchrone Nachrichten)</xs:documentation> </xs:annotation> </pre>																																		


```

</xs:annotation>
<xs:restriction base="ct:INT1">
    <xs:enumeration value="0">
        <xs:annotation>
            <xs:documentation>Die Nachricht wurde erfolgreich entgegengenommen und alle notwendigen
Informationen zur Weiterleitung liegen vor.</xs:documentation>
        </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
        <xs:annotation>
            <xs:documentation>Ungültige Nachricht. Die Sender ID oder die Routing Information kann
nicht aus dem SOAP Header extrahiert werden.</xs:documentation>
        </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
        <xs:annotation>
            <xs:documentation>Ungleiche Sender ID. Die Sender ID, die im SOAP Header uebertragen
wurde passt nicht zu der Sender ID, die in der VM zum Zertifikat des Senders hinterlegt wurde.</
xs:documentation>
        </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
        <xs:annotation>
            <xs:documentation>Unbekannter oder gesperrter Empfaenger oder zu den Routing Informationen
ist in der VM keine technische Empfaengeradresse hinterlegt.</xs:documentation>
        </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
        <xs:annotation>
            <xs:documentation>Verbindungsproblem zum Empfaenger. Es konnte keine Verbindung zum
Empfaenger aufgebaut werden.</xs:documentation>
        </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
        <xs:annotation>
            <xs:documentation>Timeout. Der Empfaenger antwortet nicht in einer vorgegebenen Zeit.</
xs:documentation>
        </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
        <xs:annotation>
            <xs:documentation>Die asynchrone Nachricht kann nicht zwischengespeichert werden.</
xs:documentation>
        </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
        <xs:annotation>
            <xs:documentation>Die Organisations-ID des Senders ist gesperrt oder der Vermittlungsstelle
nicht bekannt.</xs:documentation>
        </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="255">
        <xs:annotation>
            <xs:documentation>Technisches Problem. Es liegt ein technisches Problem vor. Die Nachricht
konnte nicht erfolgreich entgegengenommen werden.</xs:documentation>
        </xs:annotation>
    </xs:enumeration>
</xs:restriction>
</xs:simpleType>

```

Schema location	file:///C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd
-----------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------

Simple Type tns:StatusText

Namespace	http://vdv/ka/common/2
Annotations	Textuelle Beschreibung des "Status Codes" einer KA VX Nachricht
Diagram	 A UML class diagram fragment showing a class named 'StatusText' with a multiplicity of 0..1. It has a directed association to another class named 'xs:string' with a multiplicity of 1..1.
Type	restriction of xs:string
Facets	maxLength 255
Used by	Element tns:VX_Message_Type/StatusText
Source	<pre> <xs:simpleType name="StatusText"> <xs:annotation> <xs:documentation>Textuelle Beschreibung des "Status Codes" einer KA VX Nachricht</ xs:documentation> </xs:annotation> </pre>

	<pre><xs:restriction base="xs:string"> <xsmaxLength value="255"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd

Complex Type(s)

Complex Type tns:VX_Message_Type

Namespace	http://vdv/ka/common/2
Annotations	Type: Struktur einer KA VX Nachricht (Bestaetigung der ZVM fuer asynchrone Nachrichten)
Diagram	<pre> classDiagram class VX_Message_Type { StatusText StatusCode } VX_Message_Type "0..1" -- "1..1" StatusText VX_Message_Type "0..1" -- "1..1" StatusCode </pre>
Used by	Element tns:VX
Model	StatusText , StatusCode
Children	StatusCode, StatusText
Source	<pre><xs:complexType name="VX_Message_Type"> <xs:annotation> <xs:documentation>Type: Struktur einer KA VX Nachricht (Bestaetigung der ZVM fuer asynchrone Nachrichten)</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="StatusCode" type="tns:StatusCode"/> <xs:element name="StatusText" type="tns:StatusText"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd

Namespace: "http://vdv/ka/ion/2"

Schema(s)

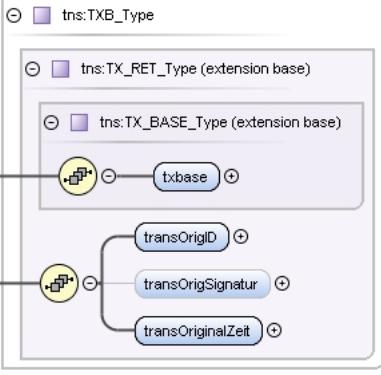
Imported schema XML-Schema_ION.xsd

Namespace	http://vdv/ka/ion/2
Properties	attribute form default: unqualified element form default: unqualified version: 1.11.1
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

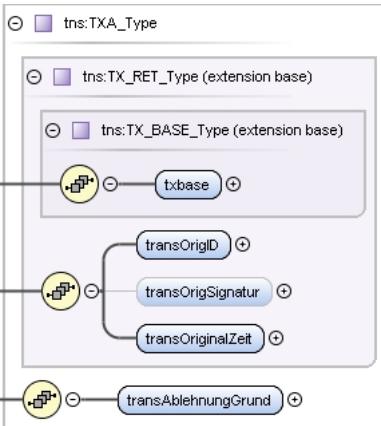
Element(s)

Element tns:TXB

Namespace	http://vdv/ka/ion/2
Annotations	Element: Bestaetigung einer ION-Transaktion

Diagram	
Type	tns:TXB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type tns:TXB_Type
Properties	content: complex
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit
Children	transOrigID, transOrigSignatur, transOriginalZeit, txbase
Instance	<pre><tns:TXB xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> </tns:TXB></pre>
Source	<pre><xss:element name="TXB" type="tns:TXB_Type"> <xss:annotation> <xss:documentation>Element: Bestaetigung einer ION-Transaktion</xss:documentation> </xss:annotation> </xss:element></pre>
Schema location	file:///C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXA

Namespace	http://vdv/ka/ion/2
Annotations	Element: Ablehnung einer ION-Transaktion
Diagram	
Type	tns:TXA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type tns:TXA_Type
Properties	content: complex

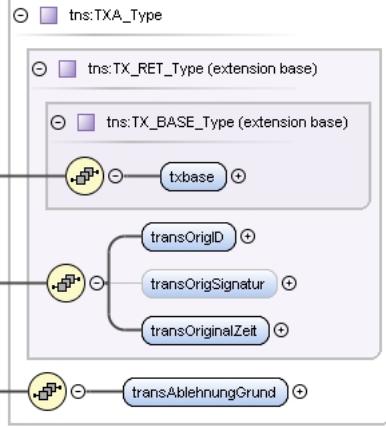
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit , transAblehnungGrund
Children	transAblehnungGrund, transOrigID, transOrigSignatur, transOriginalZeit, txbase
Instance	<pre><tns:TXA xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> <transAblehnungGrund>{1,1}</transAblehnungGrund> </tns:TXA></pre>
Source	<pre><xss:element name="TXA" type="tns:TXA_Type"> <xss:annotation> <xss:documentation>Element: Ablehnung einer ION-Transaktion</xss:documentation> </xss:annotation> </xss:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXBRequest


Namespace	http://vdv/ka/ion/2
Annotations	Element: Mitteilung eines Verarbeitungsstatus (OK)
Diagram	<pre> classDiagram class tns:TXB_Type { <<extension base>> } class tns:TX_RET_Type { <<extension base>> <<tns:TX_BASE_Type>> } class tns:TX_BASE_Type { txbase transOrigID transOriginalZeit } tns:TXBRequest --> tns:TX_BASE_Type </pre>
Type	tns:TXB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type tns:TXB_Type
Properties	content: complex
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit
Children	transOrigID, transOrigSignatur, transOriginalZeit, txbase
Instance	<pre><tns:TXBRequest xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> </tns:TXBRequest></pre>
Source	<pre><xss:element name="TXBRequest" type="tns:TXB_Type"> <xss:annotation> <xss:documentation>Element: Mitteilung eines Verarbeitungsstatus (OK)</xss:documentation> </xss:annotation> </xss:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXARequest

Namespace	http://vdv/ka/ion/2
Annotations	Element: Mitteilung eines Verarbeitungsstatus (Fehlerhaft im Drittssystem)

Diagram	
Type	tns:TXA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type tns:TXA_Type
Properties	content: complex
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit , transAblehnungGrund
Children	transAblehnungGrund, transOrigID, transOrigSignatur, transOriginalZeit, txbase
Instance	<pre><tns:TXARequest xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> <transAblehnungGrund>{1,1}</transAblehnungGrund> </tns:TXARequest></pre>
Source	<pre><x:element name="TXARequest" type="tns:TXA_Type"> <x:annotation> <x:documentation>Element: Mitteilung eines Verarbeitungsstatus (Fehlerhaft im Drittssystem)</x:documentation> </x:annotation> </x:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXDEABER

Namespace	http://vdv/ka/ion/2
Annotations	Element: Dienstanfrage: "Loeschen einer Produkt-Akzeptanz von allen akzeptierenden Organisationen"
Diagram	
Type	tns:TXDEABER_Req_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXDEABER_Req_Type
Properties	content: complex
Model	txbase , prodAkzeptanzEnde , prodProdukt_ID
Children	prodAkzeptanzEnde, prodProdukt_ID, txbase
Instance	<pre><tns:TXDEABER xmlns:tns="http://vdv/ka/ion/2"></pre>

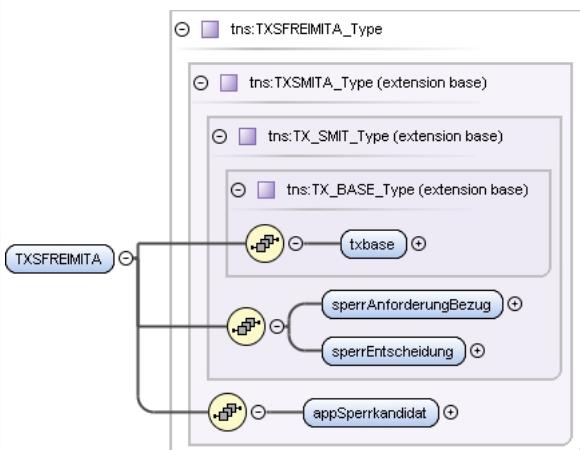
	<pre><txbase>{1,1}</txbase> <prodAkzeptanzEnde>{1,1}</prodAkzeptanzEnde> <prodProdukt_ID>{1,1}</prodProdukt_ID> </tns:TXDEABER></pre>
Source	<pre><xs:element name="TXDEABER" type="tns:TXDEABER_Req_Type"> <xs:annotation> <xs:documentation>Element: Dienstanfrage: "Loeschen einer Produkt-Akzeptanz von allen akzeptierenden Organisationen"</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:///C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd

Element tns:TXSMITA

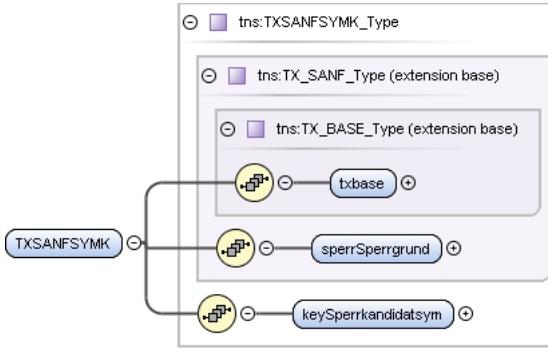
Namespace	http://vdv/ka/ion/2				
Annotations	Element: Sperrmitteilung Applikation				
Diagram	<pre> classDiagram class tns:TXSMITA_Type { <<tns:TX_SMIT_Type extension base>> <<tns:TX_BASE_Type extension base>> } class TXSMITA { <<tns:TXSMITA>> txbase sperrAnforderungBezug sperrEntscheidung appSperrkandidat } TXSMITA --> txbase TXSMITA --> sperrAnforderungBezug TXSMITA --> sperrEntscheidung TXSMITA --> appSperrkandidat </pre>				
Type	tns:TXSMITA_Type				
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITA_Type 				
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>nillable:</td> <td>false</td> </tr> </table>	content:	complex	nillable:	false
content:	complex				
nillable:	false				
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , appSperrkandidat				
Children	appSperrkandidat, sperrAnforderungBezug, sperrEntscheidung, txbase				
Instance	<pre><tns:TXSMITA xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <appSperrkandidat>{1,1}</appSperrkandidat> </tns:TXSMITA></pre>				
Source	<pre><xs:element name="TXSMITA" type="tns:TXSMITA_Type" nillable="false"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung Applikation</xs:documentation> </xs:annotation> </xs:element></pre>				
Schema location	file:///C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd				

Element tns:TXSFREIMITA

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrfreigabemitteilung Applikation

Diagram	
Type	tns:TXSFREIMITA_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SMIT_Type • tns:TXSMITA_Type • tns:TXSFREIMITA_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , appSperrkandidat
Children	appSperrkandidat, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSFREIMITA xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <appSperrkandidat>{1,1}</appSperrkandidat> </tns:TXSFREIMITA></pre>
Source	<pre><xs:element name="TXSFREIMITA" type="tns:TXSFREIMITA_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung Applikation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSANFSYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperranforderung fuer einen symmetrischen Schluessel
Diagram	
Type	tns:TXSANFSYMK_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SANF_Type • tns:TXSANFSYMK_Type

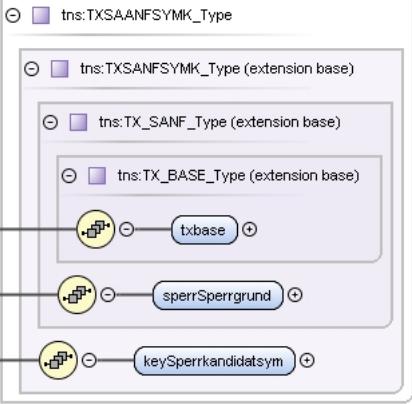
Properties	content: complex
Model	txbase , sperrSperrgrund , keySperrkandidatsym
Children	keySperrkandidatsym, sperrSperrgrund, txbase
Instance	<pre><tns:TXSANFSYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSANFSYMK></pre>
Source	<pre><xs:element name="TXSANFSYMK" type="tns:TXSANFSYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperranforderung fuer einen symmetrischen Schluessel</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSANFASYMK

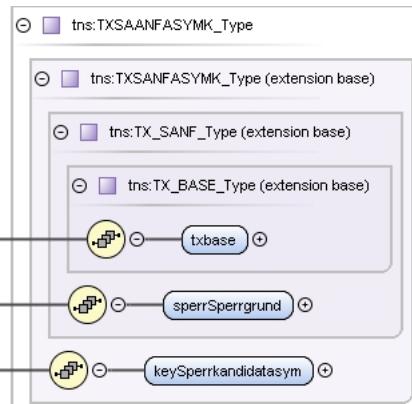
Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperranforderung fuer einen asymmetrischen Schluessel
Diagram	<pre> classDiagram class txbase class TX_SANF_Type { <<extension base>> } class TX_BASE_Type { <<extension base>> } class TXSANFASYMK { <<final type>> } txbase < -- TX_SANF_Type TX_SANF_Type < -- TX_BASE_Type TXSANFASYMK < -- TX_BASE_Type TXSANFASYMK --> txbase TXSANFASYMK --> sperrSperrgrund TXSANFASYMK --> keySperrkandidatsym </pre>
Type	tns:TXSANFASYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFASYMK_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , keySperrkandidatsym
Children	keySperrkandidatsym, sperrSperrgrund, txbase
Instance	<pre><tns:TXSANFASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSANFASYMK></pre>
Source	<pre><xs:element name="TXSANFASYMK" type="tns:TXSANFASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperranforderung fuer einen asymmetrischen Schluessel</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSAANFSYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperraufhebungsanforderung fuer einen symmetrischen Schluessel

Diagram	
Type	tns:TXSAANFSYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFSYMK_Type tns:TXSAANFSYMK_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , keySperrkandidatsym
Children	keySperrkandidatsym, sperrSperrgrund, txbase
Instance	<pre><tns:TXSAANFSYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSAANFSYMK></pre>
Source	<pre><xss:element name="TXSAANFSYMK" type="tns:TXSAANFSYMK_Type"> <xss:annotation> <xss:documentation>Element: Sperraufhebungsanforderung fuer einen symmetrischen Schluessel</xss:documentation> </xss:annotation> </xss:element></pre>
Schema location	file:///C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSAANFASYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperraufhebungsanforderung fuer einen asymmetrischen Schluessel
Diagram	
Type	tns:TXSAANFASYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFASYMK_Type tns:TXSAANFASYMK_Type

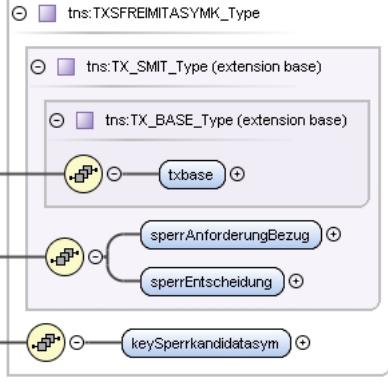
	<ul style="list-style-type: none"> • tns:TXSAANFASYMK_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , keySperrkandidatasym
Children	keySperrkandidatasym, sperrSperrgrund, txbase
Instance	<pre><tns:TXSAANFASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <keySperrkandidatasym>{1,1}</keySperrkandidatasym> </tns:TXSAANFASYMK></pre>
Source	<pre><xss:element name="TXSAANFASYMK" type="tns:TXSAANFASYMK_Type"> <xss:annotation> <xss:documentation>Element: Sperraufhebungsanforderung fuer einen asymmetrischen Schluessel</xss:documentation> </xss:annotation> </xss:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSFREIMITSYMK

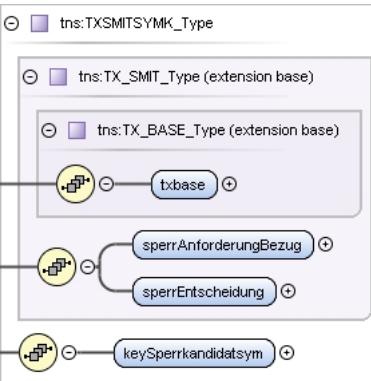
Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrfreigabemitteilung symmetrischer Key
Diagram	
Type	tns:TXSFREIMITSYMK_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SMIT_Type • tns:TXSFREIMITSYMK_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatasym
Children	keySperrkandidatasym, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSFREIMITSYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <keySperrkandidatasym>{1,1}</keySperrkandidatasym> </tns:TXSFREIMITSYMK></pre>
Source	<pre><xss:element name="TXSFREIMITSYMK" type="tns:TXSFREIMITSYMK_Type"> <xss:annotation> <xss:documentation>Element: Sperrfreigabemitteilung symmetrischer Key</xss:documentation> </xss:annotation> </xss:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSFREIMITASYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrfreigabemitteilung asymmetrischer Key

Diagram	
Type	tns:TXSFREIMITASYMK_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SMIT_Type • tns:TXSFREIMITASYMK_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym
Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSFREIMITASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSFREIMITASYMK></pre>
Source	<pre><xs:element name="TXSFREIMITASYMK" type="tns:TXSFREIMITASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung asymmetrischer Key</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSMITSYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrmitteilung symmetrischer Schluessel
Diagram	
Type	tns:TXSMITSYMK_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SMIT_Type • tns:TXSMITSYMK_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym

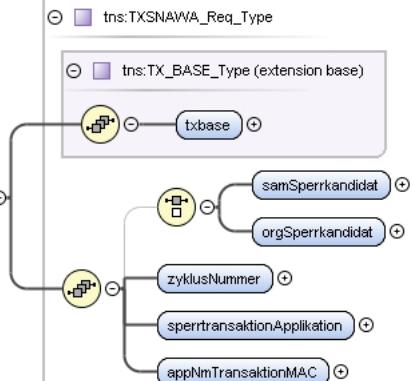
Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSMITSYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSMITSYMK></pre>
Source	<pre><xs:element name="TXSMITSYMK" type="tns:TXSMITSYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung symmetrischer Schluessel</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSMITASYMK

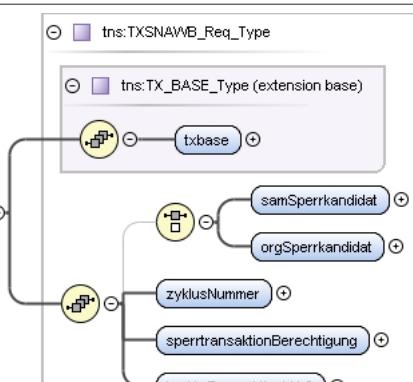
Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrmitteilung asymmetrischer Schluessel
Diagram	<pre> classDiagram class tns:TXSMITASYMK_Type { <<tns:TX_SMIT_Type (extension base)>> <<tns:TX_BASE_Type (extension base)>> } class tns:TX_SMIT_Type { <<tns:TX_BASE_Type (extension base)>> } class tns:TX_BASE_Type { txbase sperrAnforderungBezug sperrEntscheidung keySperrkandidatasym } TXSMITASYMK < -- tns:TXSMITASYMK_Type </pre>
Type	tns:TXSMITASYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITASYMK_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatasym
Children	keySperrkandidatasym, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSMITASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <keySperrkandidatasym>{1,1}</keySperrkandidatasym> </tns:TXSMITASYMK></pre>
Source	<pre><xs:element name="TXSMITASYMK" type="tns:TXSMITASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung asymmetrischer Schluessel</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSNAWA

Namespace	http://vdv/ka/ion/2
Annotations	Element: Dienstanfrage "Sperrnachweis Applikation"

Diagram	
Type	tns:TXSNAWA_Req_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXSNAWA_Req_Type
Properties	content: complex
Model	txbase , (samSperrkandidat orgSperrkandidat) , zyklusNummer , sperrtransaktionApplikation , appNmTransaktionMAC
Children	appNmTransaktionMAC, orgSperrkandidat, samSperrkandidat, sperrtransaktionApplikation, txbase, zyklusNummer
Instance	<pre><tns:TXSNAWA xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <samSperrkandidat>{1,1}</samSperrkandidat> <orgSperrkandidat>{1,1}</orgSperrkandidat> <zyklusNummer>{1,1}</zyklusNummer> <sperrtransaktionApplikation>{1,1}</sperrtransaktionApplikation> <appNmTransaktionMAC>{1,1}</appNmTransaktionMAC> </tns:TXSNAWA></pre>
Source	<pre><xs:element name="TXSNAWA" type="tns:TXSNAWA_Req_Type"> <xs:annotation> <xs:documentation>Element: Dienstanfrage "Sperrnachweis Applikation"</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSNAWB

Namespace	http://vdv/ka/ion/2
Annotations	Element: Dienstanfrage "Sperrnachweis Berechtigung"
Diagram	
Type	tns:TXSNAWB_Req_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXSNAWB_Req_Type
Properties	content: complex
Model	txbase , (samSperrkandidat orgSperrkandidat) , zyklusNummer , sperrtransaktionBerechtigung , berNmTransaktionMAC

Children	berNmTransaktionMAC, orgSperrkandidat, samSperrkandidat, sperrtransaktionBerechtigung, txbase, zyklusNummer
Instance	<pre><tns:TXSNAWB xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <samSperrkandidat>{1,1}</samSperrkandidat> <orgSperrkandidat>{1,1}</orgSperrkandidat> <zyklusNummer>{1,1}</zyklusNummer> <sperrtransaktionBerechtigung>{1,1}</sperrtransaktionBerechtigung> <berNmTransaktionMAC>{1,1}</berNmTransaktionMAC> </tns:TXSNAWB></pre>
Source	<pre><xs:element name="TXSNAWB" type="tns:TXSNAWB_Req_Type"> <xs:annotation> <xs:documentation>Element: Dienstanfrage "Sperrnachweis Berechtigung" </xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type(s)

Complex Type tns:Terminal_ID_Type


Namespace	http://vdv/ka/ion/2
Annotations	Typ: Datenstruktur Terminal_ID
Diagram	<pre> classDiagram class Terminal_ID_Type { terminalTyp terminalNummer terminalOwner_ID } </pre>
Used by	Elements tns:TXAMK_Type/tns:amTerminal_ID, tns:TX_IDENTAM_Type/tns:amTerminal_ID
Model	terminalTyp, terminalNummer, terminalOwner_ID
Children	terminalNummer, terminalOwner_ID, terminalTyp
Source	<pre><xs:complexType name="Terminal_ID_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur Terminal_ID</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="terminalTyp" type="tns:TerminalTyp_CODE_Type" /> <xs:element name="terminalNummer" type="ct:ReferenceNumberTwo" /> <xs:element name="terminalOwner_ID" type="ka:Organisation_ID" /> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:Berechtigung_ID_Type


Namespace	http://vdv/ka/ion/2
Annotations	Typ: ID einer Berechtigung
Diagram	<pre> classDiagram class Berechtigung_ID_Type { berechtigungNummer kvp_ID } </pre>
Used by	Elements tns:TXAFREIBER_Type/tns:berBerechtigung_ID, tns:TXAFREIMITBER_Type/tns:berBerechtigung_ID, tns:TXLLISBER_Type/tns:berBerechtigung_ID, tns:TX_IDENTAM_Type/tns:amAenderungsreferenz_ID, tns:TX_IDENTAM_Type/tns:berBerechtigung_ID
Model	berechtigungNummer, kvp_ID
Children	berechtigungNummer, kvp_ID
Source	<pre><xs:complexType name="Berechtigung_ID_Type"> <xs:annotation> <xs:documentation>Typ: ID einer Berechtigung</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berechtigungNummer" type="ct:ReferenceNumberFour" /> <xs:element name="kvp_ID" type="ka:Organisation_ID" /> </xs:sequence> </xs:complexType></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd
-----------------	-------------------------------------------------------------------------------------------------------------------------------------------------------


Complex Type tns:NmApplikationInstanz_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: ID einer Applikationsinstanz auf dem Nutzermedium
Diagram	
Used by	Elements tns:TXAINF_Type/tns:transAppInstanz_ID, tns:TXASAINF_Type/tns:transAppInstanz_ID, tns:TXSMITA_Type/appSperrkandidat, tns:TX_IDENTAM_Type/tns:appInstanz_ID
Model	NmAppInstanznummer , kvp_ID
Children	NmAppInstanznummer, kvp_ID
Source	<pre><xs:complexType name="NmApplikationInstanz_ID_Type"> <xs:annotation> <xs:documentation>Typ: ID einer Applikationsinstanz auf dem Nutzermedium</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="NmAppInstanznummer" type="ct:ReferenceNumberFour"/> <xs:element name="kvp_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:EFMProdukt_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Datenstruktur EFMProdukt_ID, bestehend aus Produktverantwortlichen und Produktnummer (zusammen eindeutig)
Diagram	
Used by	Elements tns:TXAMK_Type/tns:prodProdukt_ID, tns:TXDEABER_Req_Type/prodProdukt_ID, tns:TX_IDENTAM_Type/tns:prodProdukt_ID
Model	produktNummer{0,1} , organisationID
Children	organisationID, produktNummer
Source	<pre><xs:complexType name="EFMProdukt_ID_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur EFMProdukt_ID, bestehend aus Produktverantwortlichen und Produktnummer (zusammen eindeutig)</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="produktNummer" type="ct:ReferenceNumberTwo" minOccurs="0" maxOccurs="1"/> <xs:element name="organisationID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TX_BASE_Type

Namespace	http://vdv/ka/ion/2
Annotations	Basisdaten fuer alle Transaktionen
Diagram	
Used by	Complex Types tns:TXAAUFBER_Type, tns:TXAFREIBER_Type, tns:TXAFREIMITBER_Type, tns:TXAINF_Type, tns:TXAMDL_Type, tns:TXAML_Type, tns:TXAS_Type, tns:TXDEABER_Req_Type, tns:TX-EAUFBER_Type, tns:TXRAUFBER_Type, tns:TXSNAWA_Req_Type, tns:TXSNAWB_Req_Type, tns:TX_RET_Type, tns:TX_SANF_Type, tns:TX_SMIT_Type

Model	txbase
Children	txbase
Source	<pre><xs:complexType name="TX_BASE_Type"> <xs:annotation> <xs:documentation>Basisdaten fuer alle Transaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="txbase" type="tns:ION_TX_HEADER_Type"> <xs:annotation> <xs:documentation>Fachliche Daten ueber die in der Transaktion involvierten Systeme</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:ION_TX_HEADER_Type

Namespace	http://vdv/ka/ion/2
Annotations	Routing relevante Daten des Nachrichtenkopfs von VDV KA Transaktionen
Diagram	<pre> classDiagram class ION_TX_HEADER_Type { transAuftrag transEmpfaenger_ID transEmpfaengerRolle transStatus transTransaktion_ID transTransaktionsTyp transTransaktionsZeitpunkt transVersion transWiederholungsZaehler transSignaturTyp transSignaturZertifikat transSignatur } </pre>
Used by	Element tns:TX_BASE_Type/txbase
Model	transAuftrag{0,1} , transEmpfaenger_ID , transEmpfaengerRolle , transStatus{0,1} , transTransaktion_ID , transTransaktionsTyp{0,1} , transTransaktionsZeitpunkt , transVersion{0,1} , transWiederholungsZaehler{0,1} , transSignaturTyp{0,1} , transSignaturZertifikat{0,1} , transSignatur{0,1}
Children	transAuftrag, transEmpfaengerRolle, transEmpfaenger_ID, transSignatur, transSignaturTyp, transSignaturZertifikat, transStatus, transTransaktion_ID, transTransaktionsTyp, transTransaktionsZeitpunkt, transVersion, transWiederholungsZaehler
Source	<pre><xs:complexType name="ION_TX_HEADER_Type"> <xs:annotation> <xs:documentation>Routing relevante Daten des Nachrichtenkopfs von VDV KA Transaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="transAuftrag" type="xs:string" minOccurs="0" maxOccurs="1"/> <xs:element name="transEmpfaenger_ID" type="ka:Organisation_ID"> <xs:annotation> <xs:documentation>Eindeutige OrganisationsId des Nachrichtenempfaengers</xs:documentation> </xs:annotation> </xs:element> <xs:element name="transEmpfaengerRolle" type="ka:KommunikationsPartnerRolle"> <xs:annotation> <xs:documentation>Rolle des Nachrichtenempfaengers</xs:documentation> </xs:annotation> </xs:element> <xs:element name="transStatus" type="ct:INT1" minOccurs="0" maxOccurs="1"/> <xs:element name="transTransaktion_ID" type="tns:IONTransaktion_ID_Type"/> <xs:element name="transTransaktionsTyp" type="ct:INT1" minOccurs="0" maxOccurs="1"/> <xs:element name="transTransaktionsZeitpunkt" type="ct:DateTime"> <xs:annotation></pre>

```

<xs:documentation>Zeitpunkt der Dienstanfrage gemaess den Angaben der Dienstaufrufers.  
Achtung: Aufgrund von potentiell unsynchronisierten, lokalen Uhren der Kommunikationspartnern ist  
moeglicherweise die Aussagekraft dieses Feldes sehr gering.</xs:documentation>
</xs:annotation>
</xs:element>
<xs:element name="transVersion" type="ct:BitString16" minOccurs="0" maxOccurs="1"/>
<xs:element name="transWiederholungsZaehler" type="ct:INT1" minOccurs="0" maxOccurs="1"/>
<xs:element name="transSignaturTyp" type="ct:INT1" minOccurs="0" maxOccurs="1"/>
<xs:element name="transSignaturZertifikat" minOccurs="0" maxOccurs="1">
    <xs:simpleType>
        <xs:restriction base="xs:hexBinary">
            <xs:length value="378" fixed="true" />
        </xs:restriction>
    </xs:simpleType>
</xs:element>
<xs:element name="transSignatur" minOccurs="0" maxOccurs="1" type="tns:TransSignatur_Type"/>
</xs:sequence>
</xs:complexType>

```

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd
-----------------	-------------------------------------------------------------------------------------------------------------------------------------------------------

Complex Type tns:IONTransaktion_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: ID fuer Transaktionen, die ueber das ION (Interoperables Netzwerk) durchgefuehrt werden. Aufgabe dieses Elements ist es, eine Korrelation zwischen der Dienstantwort und der ursprunglichen Dienstanfrage herzustellen. transSequenznummer wird initial vom Dienstaufrufer vergeben und wird unveraendert fuer die Dauer der Kommunikation genutzt.
Diagram	<pre> classDiagram class IONTransaktion_ID_Type { <<ION Transaktion ID Type>> } class transSequenznummer class transSenderRolle class transSender_ID IONTransaktion_ID_Type "0..1" -- "1..1" transSequenznummer IONTransaktion_ID_Type "0..1" -- "1..1" transSenderRolle IONTransaktion_ID_Type "0..1" -- "1..1" transSender_ID </pre>
Used by	Elements tns:ION_TX_HEADER_Type/transTransaktion_ID, tns:TX_RET_Type/transOrigID, tns:TX_SMIT_Type/sperrAnforderungBezug
Model	transSequenznummer, transSenderRolle, transSender_ID
Children	transSenderRolle, transSender_ID, transSequenznummer
Source	<pre> <xs:complexType name="IONTransaktion_ID_Type"> <xs:annotation> <xs:documentation>Typ: ID fuer Transaktionen, die ueber das ION (Interoperables Netzwerk) durchgefuehrt werden. Aufgabe dieses Elements ist es, eine Korrelation zwischen der Dienstantwort und der ursprunglichen Dienstanfrage herzustellen. transSequenznummer wird initial vom Dienstaufrufer vergeben und wird unveraendert fuer die Dauer der Kommunikation genutzt.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="transSequenznummer" type="ct:SequenceNumberFour"/> <xs:element name="transSenderRolle" type="ka:KommunikationsPartnerRolle"/> <xs:element name="transSender_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:SymSchluessel_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Schluessel ID
Diagram	<pre> classDiagram class SymSchluessel_ID_Type { <<Sym Schluessel ID Type>> } class schlüsselNummer class schlüsselVersion class schlüsselinhaber_ID SymSchluessel_ID_Type "0..1" -- "1..1" schlüsselNummer SymSchluessel_ID_Type "0..1" -- "1..1" schlüsselVersion SymSchluessel_ID_Type "0..1" -- "1..1" schlüsselinhaber_ID </pre>
Used by	Elements tns:TXAAUFBER_Type/tns:amMKERF-NM-MAC_ID, tns:TXAAUFBER_Type/tns:amMKVVP-NM-MAC_ID, tns:TXAAUFBER_Type/tns:amMKPV-NM-MAC_ID, tns:TXALISBER_Type/tns:amMKERF-NM-MAC_ID, tns:TXALISBER_Type/tns:amMKVVP-NM-MAC_ID, tns:TX-

	ALISBER_Type/tns:amMKPV-NM-MAC_ID, tns:TXSANFSYMK_Type/keySperrkandidatsym, tns:TXSFREIMITSYMK_Type/keySperrkandidatsym, tns:TXSMITSYMK_Type/keySperrkandidatsym, tns:appNmTransaktionMAC_Type/appMAC_AH_Schlüssel_ID, tns:appNmTransaktionMAC_Type/berMAC_KVP_Schlüssel_ID, tns:berNmTransaktionMAC_Type/berMAC_PV_Schlüssel_ID
Model	schlüsselNummer , schlüsselVersion , schlüsselInhaber_ID
Children	schlüsselInhaber_ID, schlüsselNummer, schlüsselVersion
Source	<pre><xs:complexType name="SymSchlüssel_ID_Type"> <xs:annotation> <xs:documentation>Typ: Schlüssel ID</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="schlüsselNummer" type="ct:INT1"/> <xs:element name="schlüsselVersion" type="ct:INT1"/> <xs:element name="schlüsselInhaber_ID" type="ct:ReferenceNumberTwo"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TX_BER_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Basisdaten fuer Berechtigungstransaktionen
Diagram	<pre> classDiagram TX_BASE_Type < -- TX_BER_Type TX_BER_Type { berGueltigkeitsbeginn berGueltigkeitsende prodAbrechnungsVerfahren berBezahlArt berBezahlMittel } </pre>
Used by	Elements tns:TXAAUFBER_Type/tns:tx_ber, tns:TXALISBER_Type/tns:tx_ber
Model	berGueltigkeitsbeginn , berGueltigkeitsende , prodAbrechnungsVerfahren , berBezahlArt , berBezahlMittel
Children	berBezahlArt, berBezahlMittel, berGueltigkeitsbeginn, berGueltigkeitsende, prodAbrechnungsVerfahren
Source	<pre><xs:complexType name="TX_BER_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Berechtigungstransaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berGueltigkeitsbeginn" type="ct:DateTimeCompact"/> <xs:element name="berGueltigkeitsende" type="ct:DateTimeCompact"/> <!-- Wilk Hoffmann: korrigiert --> <xs:element name="prodAbrechnungsVerfahren" type="tns:Abrechnungsverfahren_CODE_Type"/> <!-- Wilk Hoffmann: korrigiert --> <xs:element name="berBezahlArt" type="tns:Bezahlart_CODE_Type"/> <xs:element name="berBezahlMittel" type="ct:OctetString10"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXAS_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Aufforderung zum Senden
Diagram	<pre> classDiagram TX_BASE_Type < -- TXAS_Type TXAS_Type { txbase transSendeAuftrag transSendeAuftragstyp } </pre>
Type	extension of tns:TX_BASE_Type

Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXAS_Type
Used by	Complex Type tns:TXASAINF_Type Elements tns:TXASAMDL, tns:TXASAML, tns:TXSAMTDL, tns:TXSAMTL
Model	txbase , transSendeAuftrag , transSendeAuftragstyp
Children	transSendeAuftrag, transSendeAuftragstyp, txbase
Source	<pre><xs:complexType name="TXAS_Type"> <xs:annotation> <xs:documentation>Typ: Aufforderung zum Senden</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:element name="transSendeAuftrag"> <xs:simpleType> <xs:restriction base="tns:PrintableString"> <xs:minLength value="0"/> <xsmaxLength value="10"/> </xs:restriction> </xs:simpleType> </xs:element> <!-- TODO Wilk Hoffmann: Wenn dann bitte mit Aufzaehlung (verschoben bis stabil)--> <xs:element name="transSendeAuftragstyp" type="tns:AuftragsTyp_CODE"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd

Complex Type tns:Ort_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Datenstruktur Ort_ID
Diagram	<pre> classDiagram class Ort_ID_Type { +ortTyp +ortNummer +ortDomaene_ID } </pre>
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Source	<pre><xs:complexType name="Ort_ID_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur Ort_ID</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="ortTyp" type="tns:OrtsTyp_CODE_Type"/> <xs:element name="ortNummer" type="ct:ReferenceNumberThree"/> <!-- Wilk Hoffmann: korrigiert --> <xs:element name="ortDomaene_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd

Complex Type tns:Transaktionsdatensatz_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Transaktionsdatensatz
Diagram	<pre> classDiagram class Transaktionsdatensatz_Type { +Transaktionsdaten +Transaktionsdaten } </pre>
Used by	Elements tns:TXSNAWA_Req_Type/sperrtransaktionApplikation, tns:TXSNAWB_Req_Type/sperrtransaktion-Berechtigung
Model	Transaktionsdaten
Children	Transaktionsdaten

Source	<pre><xs:complexType name="Transaktionsdatensatz_Type"> <xs:annotation> <xs:documentation>Typ: Transaktionsdatensatz</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="Transaktionsdaten" type="xs:hexBinary"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:ASymSchluessel_ID_Type

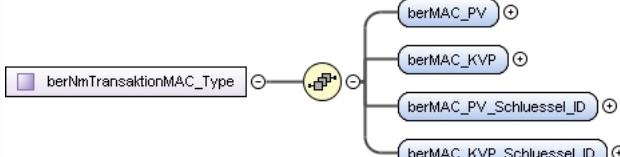
Namespace	http://vdv/ka/ion/2
Annotations	Type: Identifizierungsmerkmal, das den Schluessel eindeutig bestimmt.
Diagram	<pre> classDiagram class ASymSchluessel_ID_Type class signaturSchluessel ASymSchluessel_ID_Type "1..*" -- "0..1" signaturSchluessel </pre>
Used by	Elements tns:TXSANFASYMK_Type/keySperrkandidatasym, tns:TXSFREIMITASYMK_Type/keySperrkandidatasym, tns:TXSMITASYMK_Type/keySperrkandidatasym
Model	signaturSchluessel
Children	signaturSchluessel
Source	<pre><xs:complexType name="ASymSchluessel_ID_Type"> <xs:annotation> <xs:documentation>Type: Identifizierungsmerkmal, das den Schluessel eindeutig bestimmt.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="signaturSchluessel" type="ct:OctetString12"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:appNmTransaktionMAC_Type

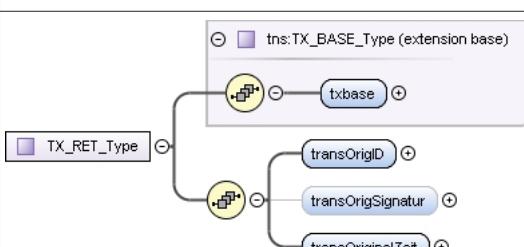
Namespace	http://vdv/ka/ion/2
Annotations	Typ: MAC-Sicherung fuer Applikations-Transaktionen
Diagram	<pre> classDiagram class appNmTransaktionMAC_Type class appMAC_AH class appMAC_KVP class appMAC_AH_Schluessel_ID class appMAC_KVP_Schluessel_ID appNmTransaktionMAC_Type "1..*" -- "0..1" appMAC_AH appNmTransaktionMAC_Type "1..*" -- "0..1" appMAC_KVP appNmTransaktionMAC_Type "1..*" -- "0..1" appMAC_AH_Schluessel_ID appNmTransaktionMAC_Type "1..*" -- "0..1" appMAC_KVP_Schluessel_ID </pre>
Used by	Element tns:TXSNAWA_Req_Type/appNmTransaktionMAC
Model	appMAC_AH , appMAC_KVP , appMAC_AH_Schluessel_ID , appMAC_KVP_Schluessel_ID
Children	appMAC_AH, appMAC_AH_Schluessel_ID, appMAC_KVP, appMAC_KVP_Schluessel_ID
Source	<pre><xs:complexType name="appNmTransaktionMAC_Type"> <xs:annotation> <xs:documentation>Typ: MAC-Sicherung fuer Applikations-Transaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="appMAC_AH" type="ct:OctetString8"/> <xs:element name="appMAC_KVP" type="ct:OctetString8"/> <xs:element name="appMAC_AH_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/> <xs:element name="appMAC_KVP_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:berNmTransaktionMAC_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: MAC-Sicherung fuer Berechtigungs-Transaktionen

Diagram	
Used by	Element tns:TXSNAWB_Req_Type/berNmTransaktionMAC
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schluessel_ID , berMAC_KVP_Schluessel_ID
Children	berMAC_KVP, berMAC_KVP_Schluessel_ID, berMAC_PV, berMAC_PV_Schluessel_ID
Source	<pre><xs:complexType name="berNmTransaktionMAC_Type"> <xs:annotation> <xs:documentation>Typ: MAC-Sicherung fuer Berechtigungs-Transaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berMAC_PV" type="ct:OctetString8"/> <xs:element name="berMAC_KVP" type="ct:OctetString8"/> <xs:element name="berMAC_PV_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/> <xs:element name="berMAC_KVP_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd

Complex Type tns:TX_RET_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Basisdaten fuer Antworttransaktion
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_RET_Type
Used by	Complex Types tns:TXA_Type, tns:TXB_Type
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit
Children	transOrigID, transOrigSignatur, transOriginalZeit, txbase
Source	<pre><xs:complexType name="TX_RET_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Antworttransaktion</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:element name="transOrigID" type="tns:IONTransaktion_ID_Type"/> <xs:element name="transOrigSignatur" minOccurs="0" maxOccurs="1" type="tns:TransSignatur_Type"/> <xs:element name="transOriginalZeit" type="xs:dateTime"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd

Complex Type tns:TX_SMIT_Type

Namespace	http://vdv/ka/ion/2
-----------	---------------------

Annotations	Typ: Basisdaten fuer Sperrmitteilungen
Diagram	<pre> classDiagram TX_BASE_Type < -- TX_SMIT_Type TX_SMIT_Type { txbase sperrAnforderungBezug sperrEntscheidung } </pre>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SMIT_Type
Used by	Complex Types tns:TXSFREIMITASYMK_Type, tns:TXSFREIMITSYMK_Type, tns:TXSMITASYMK_Type, tns:TXSMITA_Type, tns:TXSMITSYMK_Type
Model	txbase , sperrAnforderungBezug , sperrEntscheidung
Children	sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre> <xs:complexType name="TX_SMIT_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Sperrmitteilungen</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:element name="sperrAnforderungBezug" type="tns:IONTransaktion_ID_Type"/> <xs:element name="sperrEntscheidung" type="tns:Mitteilung_CODE_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TX_SANF_Type

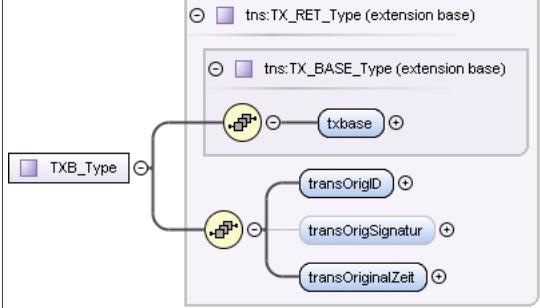
Namespace	http://vdv/ka/ion/2
Annotations	Typ: Basisdaten fuer Sperranforderungen
Diagram	<pre> classDiagram TX_BASE_Type < -- TX_SANF_Type TX_SANF_Type { txbase sperrSperrgrund } </pre>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SANF_Type
Used by	Complex Types tns:TXSANFASYMK_Type, tns:TXSANFSYMK_Type
Model	txbase , sperrSperrgrund
Children	sperrSperrgrund, txbase
Source	<pre> <xs:complexType name="TX_SANF_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Sperranforderungen</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <!-- Wilk Hoffmann: muss spaeter aus Aufzaehlung kommen --> <xs:element name="sperrSperrgrund" type="ct:INT1"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXA_Type

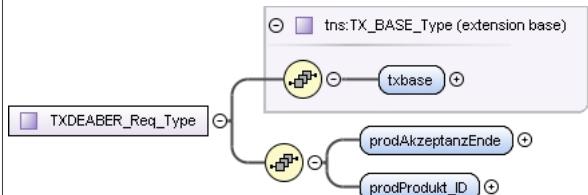
Namespace	http://vdv/ka/ion/2
Annotations	Typ: Ablehnung einer ION-Transaktion
Diagram	<pre> classDiagram TXA_Type < -- TX_RET_Type TX_RET_Type < -- TX_BASE_Type TXA_Type "1..1" --> txbase TXA_Type "1..1" --> transAblehnungGrund TXA_Type "1..1" --> transOrigID TXA_Type "1..1" --> transOrigSignatur TXA_Type "1..1" --> transOriginalZeit </pre>
Type	extension of tns:TX_RET_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_RET_Type • tns:TXA_Type
Used by	Elements tns:TXA, tns:TXARequest
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit , transAblehnungGrund
Children	transAblehnungGrund, transOrigID, transOrigSignatur, transOriginalZeit, txbase
Source	<pre> <xss:complexType name="TXA_Type"> <xss:annotation> <xss:documentation>Typ: Ablehnung einer ION-Transaktion</xss:documentation> </xss:annotation> <xss:complexContent> <xss:extension base="tns:TX_RET_Type"> <xss:sequence> <xss:element name="transAblehnungGrund" type="ct:INT1"> <xss:annotation> <xss:documentation>WICHTIG: Aus Historischen Gruenden ist TXA_Type ein allgemeiner Typ, der von allen teilnehmenden Systemen genutzt wird. Das fuehrt dazu, dass sich alle Systeme dieselben 'transAblehnungGrund' Fehlercodes teilen. Dies ist suboptimal, da, wann immer sich einer der 'transAblehnungGrund' Fehlercodes veraendert, alle teilnehmenden Systeme angepasst, getestet und in einer neuen Version zur Verfuegung gestellt werden muessten. Um TXA wie bisher weiterverwenden zu koennen, und um das beschriebene Abhaengigkeitsproblem zu vermeiden, wurde dieses Feld nicht mit expliziter Aufzaehlung der moeglichen Fehlercodes, sondern mit einem simplen numerischen Typen versehen. Die genauen Fehlercodes sind der Schnittstelle des jeweiligen konkreten teilnehmenden Systems zu entnehmen. Die Codes 0 bis 9 (einschliesslich) sind fuer allgemeine Fehler reserviert und duerfen von den teilnehmenden Systemen nur fuer die vorgesehene Semantik verwendet werden (siehe Typ 'CommonServiceResultCode'). Es wird empfohlen, fuer die Vollstaendigkeit der Schnittstelle, in den XSDs des jeweiligen Systems einen Aufzaehlungstypen vom Basistypen 'ct:INT1' mit den jeweiligen Fehlercodes des Systems zu definieren.</xss:documentation> </xss:annotation> </xss:element> </xss:sequence> </xss:extension> </xss:complexContent> </xss:complexType> </pre>
Schema location	file:///C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXB_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Bestaetigung einer ION-Transaktion

Diagram	
Type	extension of tns:TX_RET_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_RET_Type • tns:TXB_Type
Used by	Elements tns:TXB, tns:TXBRequest
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit
Children	transOrigID, transOrigSignatur, transOriginalZeit, txbase
Source	<pre><xs:complexType name="TXB_Type"> <xs:annotation> <xs:documentation>Typ: Bestaetigung einer ION-Transaktion</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_RET_Type" /> </xs:complexContent> </xs:complexType></pre>
Schema location	file:///C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXDEABER_Req_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Dienstanfrage "Entfernen einer Produkt Akzeptanz fuer alle Organisationen"
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXDEABER_Req_Type
Used by	Element tns:TXDEABER
Model	txbase , prodAkzeptanzEnde , prodProdukt_ID
Children	prodAkzeptanzEnde, prodProdukt_ID, txbase
Source	<pre><xs:complexType name="TXDEABER_Req_Type"> <xs:annotation> <xs:documentation>Typ: Dienstanfrage "Entfernen einer Produkt Akzeptanz fuer alle Organisationen" </xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type" > <xs:sequence> <xs:element name="prodAkzeptanzEnde" type="ct:Date" /> <xs:element name="prodProdukt_ID" type="tns:EFMProdukt_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd
-----------------	-------------------------------------------------------------------------------------------------------------------------------------------------------

Complex Type tns:TXSMITA_Type

Namespace	http://vdv/ka/ion/2				
Annotations	Typ: Sperrmitteilung Applikation				
Diagram	<pre> classDiagram TX_SMIT_Type < -- TX_BASE_Type TX_BASE_Type < -- TXSMITA_Type TXSMITA_Type { txbase sperrAnforderungBezug sperrEntscheidung appSperrkandidat } </pre>				
Type	extension of tns:TX_SMIT_Type				
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITA_Type 				
Used by	<table> <tr> <td>Complex Type</td> <td>tns:TXSFREIMITA_Type</td> </tr> <tr> <td>Element</td> <td>tns:TXSMITA</td> </tr> </table>	Complex Type	tns:TXSFREIMITA_Type	Element	tns:TXSMITA
Complex Type	tns:TXSFREIMITA_Type				
Element	tns:TXSMITA				
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , appSperrkandidat				
Children	appSperrkandidat, sperrAnforderungBezug, sperrEntscheidung, txbase				
Source	<pre> <xss:complexType name="TXSMITA_Type"> <xss:annotation> <xss:documentation>Typ: Sperrmitteilung Applikation</xss:documentation> </xss:annotation> <xss:complexContent> <xss:extension base="tns:TX_SMIT_Type"> <xss:sequence> <xss:element name="appSperrkandidat" type="tns:NmApplikationInstanz_ID_Type" nillable="false"/> </xss:sequence> </xss:extension> </xss:complexContent> </xss:complexType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Complex Type tns:TXSFREIMITA_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperrfreigabemitteilung Applikation
Diagram	<pre> classDiagram TXSMITA_Type < -- TX_BASE_Type TX_BASE_Type < -- TXSFREIMITA_Type TXSFREIMITA_Type { txbase sperrAnforderungBezug sperrEntscheidung appSperrkandidat } </pre>
Type	extension of tns:TXSMITA_Type

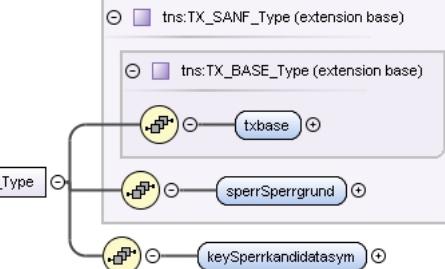
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type <ul style="list-style-type: none"> • tns:TX_SMIT_Type • tns:TXSMITA_Type • tns:TXSFREIMITA_Type
Used by	Element tns:TXSFREIMITA
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , appSperrkandidat
Children	appSperrkandidat, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre><xs:complexType name="TXSFREIMITA_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung Applikation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXSMITA_Type" /> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSANFSYMK_Type

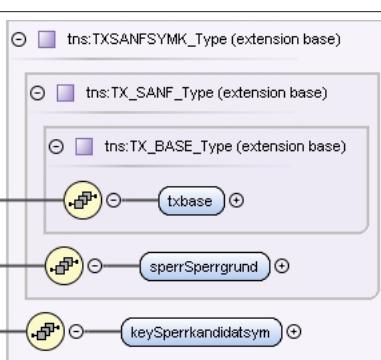
Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperranforderung fuer einen symmetrischen Schluessel
Diagram	<pre> classDiagram TXSANFSYMK_Type < -- TX_SANF_Type TX_SANF_Type < -- TX_BASE_Type TXSANFSYMK_Type "1" -- "3" txbase TXSANFSYMK_Type "1" -- "3" sperrSperrgrund TXSANFSYMK_Type "1" -- "3" keySperrkandidatsym </pre>
Type	extension of tns:TX_SANF_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type <ul style="list-style-type: none"> • tns:TX_SANF_Type • tns:TXSANFSYMK_Type
Used by	<p>Complex Type tns:TXSAANFSYMK_Type</p> <p>Element tns:TXSANFSYMK</p>
Model	txbase , sperrSperrgrund , keySperrkandidatsym
Children	keySperrkandidatsym, sperrSperrgrund, txbase
Source	<pre><xs:complexType name="TXSANFSYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperranforderung fuer einen symmetrischen Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SANF_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSANFASYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperranforderung fuer einen asymmetrischen Schluessel

Diagram	
Type	extension of tns:TX_SANF_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SANF_Type • tns:TXSANFASYMK_Type
Used by	Complex Type tns:TXSAANFSYMK_Type Element tns:TXSANFASYMK
Model	txbase , sperrSperrgrund , keySperrkandidatsym
Children	keySperrkandidatsym, sperrSperrgrund, txbase
Source	<pre><xs:complexType name="TXSANFASYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperranforderung fuer einen asymmetrischen Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SANF_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:ASymSchluessel_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSAANFSYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperraufhebungsanforderung fuer einen symmetrischen Schluessel
Diagram	
Type	extension of tns:TXSANFSYMK_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SANF_Type • tns:TXSANFSYMK_Type • tns:TXSAANFSYMK_Type
Used by	Element tns:TXSAANFSYMK
Model	txbase , sperrSperrgrund , keySperrkandidatsym
Children	keySperrkandidatsym, sperrSperrgrund, txbase
Source	<pre><xs:complexType name="TXSAANFSYMK_Type"></pre>

	<pre> <xs:annotation> <xs:documentation>Typ: Sperraufhebungsanforderung fuer einen symmetrischen Schluessel</ xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXSANFASYMK_Type" /> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSAANFASYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperraufhebungsanforderung fuer einen asymmetrischen Schluessel
Diagram	<pre> graph TD TXSANFASYMK_Type["tns:TXSANFASYMK_Type (extension base)"] --> TX_BASE_Type["tns:TX_BASE_Type (extension base)"] TX_BASE_Type --> TX_SANF_Type["tns:TX_SANF_Type (extension base)"] TXSAANFASYMK_Type["tns:TXSAANFASYMK_Type"] --> txbase TXSAANFASYMK_Type --> sperrSperrgrund TXSAANFASYMK_Type --> keySperrkandidatasym </pre>
Type	extension of tns:TXSANFASYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFASYMK_Type tns:TXSAANFASYMK_Type
Used by	Element tns:TXSAANFASYMK
Model	txbase , sperrSperrgrund , keySperrkandidatasym
Children	keySperrkandidatasym, sperrSperrgrund, txbase
Source	<pre> <xs:complexType name="TXSAANFASYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperraufhebungsanforderung fuer einen asymmetrischen Schluessel</ xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXSANFASYMK_Type" /> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSFREIMITSYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperrfreigabemitteilung symmetrischer Schluessel
Diagram	<pre> graph TD TX_SMIT_Type["tns:TX_SMIT_Type (extension base)"] --> TX_BASE_Type["tns:TX_BASE_Type (extension base)"] TXSFREIMITSYMK_Type["tns:TXSFREIMITSYMK_Type"] --> txbase TXSFREIMITSYMK_Type --> sperrAnforderungBezug TXSFREIMITSYMK_Type --> sperrEntscheidung TXSFREIMITSYMK_Type --> keySperrkandidatasym </pre>

Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SMIT_Type • tns:TXSFREIMITSYMK_Type
Used by	Element tns:TXSFREIMITSYMK
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym
Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre><xs:complexType name="TXSFREIMITSYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung symmetrischer Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSFREIMITASYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperrfreigabemitteilung asymmetrischer Schluessel
Diagram	<pre> classDiagram TX_SFREIMITASYMK_Type < -- TX_SMIT_Type TX_SMIT_Type < -- TX_BASE_Type TX_SFREIMITASYMK_Type "1..1" --> txbase TX_SFREIMITASYMK_Type "1..1" --> sperrAnforderungBezug TX_SFREIMITASYMK_Type "1..1" --> sperrEntscheidung TX_SFREIMITASYMK_Type "1..1" --> keySperrkandidatsym </pre>
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SMIT_Type • tns:TXSFREIMITASYMK_Type
Used by	Element tns:TXSFREIMITASYMK
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym
Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre><xs:complexType name="TXSFREIMITASYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung asymmetrischer Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:ASymSchluessel_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSMITSYMK_Type

Namespace	http://vdv/ka/ion/2
-----------	---------------------

Annotations	Typ: Sperrmitteilung symmetrischer Schuessel
Diagram	<pre> classDiagram TX_SMIT_Type < -- TX_BASE_Type TX_BASE_Type < -- TXSMITSYMK_Type TXSMITSYMK_Type "0..1" --> txbase TXSMITSYMK_Type "0..1" --> sperrAnforderungBezug TXSMITSYMK_Type "0..1" --> sperrEntscheidung TXSMITSYMK_Type "0..1" --> keySperrkandidatsym </pre>
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITSYMK_Type
Used by	Element tns:TXSMITSYMK
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym
Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre> <xs:complexType name="TXSMITSYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperrmitteilung symmetrischer Schuessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSMITASYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperrmitteilung asymmetrischer Schuessel
Diagram	<pre> classDiagram TX_SMIT_Type < -- TX_BASE_Type TX_BASE_Type < -- TXSMITASYMK_Type TXSMITASYMK_Type "0..1" --> txbase TXSMITASYMK_Type "0..1" --> sperrAnforderungBezug TXSMITASYMK_Type "0..1" --> sperrEntscheidung TXSMITASYMK_Type "0..1" --> keySperrkandidatasym </pre>
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITASYMK_Type
Used by	Element tns:TXSMITASYMK
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatasym
Children	keySperrkandidatasym, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre> <xs:complexType name="TXSMITASYMK_Type"> <xs:annotation> </pre>

	<pre> <xs:documentation>Typ: Sperrmitteilung asymmetrischer Schuessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="keySperrkandidatasym" type="tns:ASymSchluessel_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSNAWA_Req_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Dienstanfrage "Sperrnachweis Applikation"
Diagram	<pre> classDiagram TXSNAWA_Req_Type < -- TX_BASE_Type TXSNAWA_Req_Type { txbase samSperrkandidat orgSperrkandidat zyklusNummer sperrtransaktionApplikation appNmTransaktionMAC } </pre>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXSNAWA_Req_Type
Used by	Element tns:TXSNAWA
Model	txbase , (samSperrkandidat orgSperrkandidat) , zyklusNummer , sperrtransaktionApplikation , appNmTransaktionMAC
Children	appNmTransaktionMAC, orgSperrkandidat, samSperrkandidat, sperrtransaktionApplikation, txbase, zyklusNummer
Source	<pre> <xs:complexType name="TXSNAWA_Req_Type"> <xs:annotation> <xs:documentation>Typ: Dienstanfrage "Sperrnachweis Applikation"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:choice minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Wurde eine Applikation Aufgrund einer SAM bzw. Organisationssperre durchgefuehrt, so ist die SAM bzw. Org ID in dem jeweiligen Element zu uebermitteln.</xs:documentation> </xs:annotation> <xs:element name="samSperrkandidat" type="tns:SAM_ID_Type" /> <xs:element name="orgSperrkandidat" type="ka:Organisation_ID" /> </xs:choice> <xs:element name="zyklusNummer" type="tns:SperrlistenZyklusNummer_Type" /> <xs:annotation> <xs:documentation>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="sperrtransaktionApplikation" type="tns:Transaktionsdatensatz_Type" /> <xs:element name="appNmTransaktionMAC" type="tns:appNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSNAWB_Req_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Dienstanfrage "Sperrnachweis Berechtigung"
Diagram	<pre> classDiagram TXSNAWB_Req_Type < -- TX_BASE_Type TXSNAWB_Req_Type { txbase samSperrkandidat orgSperrkandidat zyklusNummer sperrtransaktionBerechtigung berNmTransaktionMAC } </pre>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXSNAWB_Req_Type
Used by	Element tns:TXSNAWB
Model	txbase , (samSperrkandidat orgSperrkandidat) , zyklusNummer , sperrtransaktionBerechtigung , berNmTransaktionMAC
Children	berNmTransaktionMAC, orgSperrkandidat, samSperrkandidat, sperrtransaktionBerechtigung, txbase, zyklusNummer
Source	<pre> <xs:complexType name="TXSNAWB_Req_Type"> <xs:annotation> <xs:documentation>Typ: Dienstanfrage "Sperrnachweis Berechtigung"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:choice minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Wurde eine Applikation Aufgrund einer SAM bzw. Organisationssperre durchgefuehrt, so ist die SAM bzw. Org ID in dem jeweiligen Element zu uebermitteln.</xs:documentation> </xs:annotation> <xs:element name="samSperrkandidat" type="tns:SAM_ID_Type"/> <xs:element name="orgSperrkandidat" type="ka:Organisation_ID"/> </xs:choice> <xs:element name="zyklusNummer" type="tns:SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="sperrtransaktionBerechtigung" type="tns:Transaktionsdatensatz_Type"/> <xs:element name="berNmTransaktionMAC" type="tns:berNmTransaktionMAC_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Simple Type(s)

Simple Type tns:TerminalTyp_CODE_Type


Namespace	http://vdv/ka/ion/2
Annotations	<p>Classifies terminals. From EN 1545: DeviceTypeCode. See Spec BOM table 6-85.</p> <p>Der TerminalTyp_CODE klassifiziert Terminals.</p> <p>Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschräenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung TerminalTypeEnum_Type im entsprechenden Schema (XML-Schema_ION.Enums_ext-1.x.x.xsd) umgesetzt werden.</p>

Diagram					
Type	tns:INT1				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:TerminalTyp_CODE_Type 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	Element tns:Terminal_ID_Type/terminalTyp				
Source	<pre><xs:simpleType name="TerminalTyp_CODE_Type"> <xs:annotation> <xs:documentation>Classifies terminals. From EN 1545: DeviceTypeCode. See Spec BOM table 6-85. Der TerminalTyp_CODE klassifiziert Terminals. Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschaenigung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung TerminalTypEnum_Type im entsprechenden Schema (XML-Schema_ION.Enums_ext-1.x.x.xsd) umgesetzt werden.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1" /> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd				

Simple Type tns:TransSignatur_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ fuer die Signatur auf der Transaktion (altes Verfahren)
Diagram	
Type	restriction of xs:hexBinary
Facets	length 128
Used by	Elements tns:ION_TX_HEADER_Type/transSignatur, tns:TX_RET_Type/transOrigSignatur
Source	<pre><xs:simpleType name="TransSignatur_Type"> <xs:annotation> <xs:documentation>Typ fuer die Signatur auf der Transaktion (altes Verfahren)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="128" fixed="true" /> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd

Simple Type tns:Abrechnungsverfahren_CODE_Type


Namespace	http://vdv/ka/ion/2								
Annotations	Der AbrechnungsVerfahren_CODE klassifiziert das Verfahren der Fahrpreisabrechnung.								
Diagram									
Type	restriction of tns:INT1								
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:Abrechnungsverfahren_CODE_Type 								
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> <tr> <td>enumeration</td><td>0 Keine Angabe</td></tr> <tr> <td>enumeration</td><td>1 Pre-Paid</td></tr> </table>	maxInclusive	255	minInclusive	0	enumeration	0 Keine Angabe	enumeration	1 Pre-Paid
maxInclusive	255								
minInclusive	0								
enumeration	0 Keine Angabe								
enumeration	1 Pre-Paid								

	enumeration	2	Post-Paid
	enumeration	3	Trip-Paid
Used by	Element	tns:TX_BER_Type/prodAbrechnungsVerfahren	
Source	<pre><xs:simpleType name="Abrechnungsverfahren_CODE_Type"> <xs:annotation> <xs:documentation>Der AbrechnungsVerfahren_CODE klassifiziert das Verfahren der Fahrpreisabrechnung.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Keine Angabe</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Pre-Paid</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Post-Paid</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Trip-Paid</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd		

Simple Type tns:Bezahlart_CODE_Type

Namespace	http://vdv/ka/ion/2				
Annotations	<p>Der BezahlArt_CODE klassifiziert Arten der Bezahlung (von Wertobjekten der Kernapplikation).</p> <p>Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschräenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu können. Der semantische Check muss in der Software mit Hilfe der Aufzaehlung BezahlartEnum_Type im entsprechenden Schema (XML-Schema_ION.Enums_ext-1.x.x.xsd) umgesetzt werden.</p>				
Diagram	<pre> classDiagram class Bezahlart_CODE_Type { <<ct:INT1>> } class Bezahlart_CODE_Type { <<ct:INT1>> } Bezahlart_CODE_Type < -- ct:INT1 </pre>				
Type	tns:INT1				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:Bezahlart_CODE_Type 				
Facets	maxInclusive	255			
	minInclusive	0			
Used by	Element	tns:TX_BER_Type/berBezahlArt			
Source	<pre><xs:simpleType name="Bezahlart_CODE_Type"> <xs:annotation> <xs:documentation>Der BezahlArt_CODE klassifiziert Arten der Bezahlung (von Wertobjekten der Kernapplikation). Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschräenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu können. Der semantische Check muss in der Software mit Hilfe der Aufzaehlung BezahlartEnum_Type im entsprechenden Schema (XML-Schema_ION.Enums_ext-1.x.x.xsd) umgesetzt werden.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1" /> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd				

Simple Type tns:PrintableString

Namespace	http://vdv/ka/ion/2	
Diagram		
Type	restriction of xs:string	
Facets	pattern [-p]*	
Used by	Elements tns:TXAMK_Type/tns:amTerminalBezeichnung, tns:TXAMK_Type/tns:amTerminalGruppeBezeichnung, tns:TXAMK_Type/tns:amTerminalGruppeZusatzinfo, tns:TXAMK_Type/tns:amTerminalZusatzinfo, tns:TXAS_Type/transSendeAuftrag	
Source	<pre><xs:simpleType name="PrintableString"> <xs:restriction base="xs:string"> <xs:pattern value="[-p]*"/> </xs:restriction> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd	

Simple Type tns:AuftragsTyp_CODE

Namespace	http://vdv/ka/ion/2	
Annotations	Der Code des Auftrages als Aufzaehlung.	
Diagram		
Type	tns:INT1	
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT1 • tns:AuftragsTyp_CODE 	
Facets	maxInclusive	255
	minInclusive	0
Used by	Elements tns:TXALISBER_Type/tns:amAuftragsTyp, tns:TXAS_Type/transSendeAuftragstyp, tns:TX-ELISBER_Type/tns:amAuftragsTyp, tns:TXLLISBER_Type/tns:amAuftragsTyp, tns:TXR-LISBER_Type/tns:amAuftragsTyp	
Source	<pre><xs:simpleType name="AuftragsTyp_CODE"> <xs:annotation> <xs:documentation>Der Code des Auftrages als Aufzaehlung.</xs:documentation> </xs:annotation> <!-- TODO: bitte als Aufzaehlung!!! --> <xs:restriction base="ct:INT1" /> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd	

Simple Type tns:NmTransaktionsTyp_CODE

Namespace	http://vdv/ka/ion/2	
Annotations	Der NmTransaktionsTyp_CODE klassifiziert Arten von Transaktionen, die mit Wertobjekten auf dem Nutzermedium auftreten	
Diagram		
Type	restriction of tns:INT1	
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT1 • tns:NmTransaktionsTyp_CODE 	
Facets	maxInclusive	255
	minInclusive	0
	enumeration	0 Keine Angabe
	enumeration	1 Ausgabetransaktion - Applikation oder

		Berechtigung
enumeration	2	Entwertung
enumeration	11	CI
enumeration	12	CO
enumeration	15	Einzahlung - Berechtigung
enumeration	16	CI nach Fahrtfortsetzung
enumeration	18	NTP Aendern
enumeration	20	Sperrtransaktion Applikation oder Berechtigung
enumeration	21	Entsperrtransaktion Applikation oder Berechtigung
enumeration	22	BI
enumeration	23	BO
enumeration	24	INOUT
enumeration	25	Rueckgabetransaktion - Applikation oder Berechtigung
enumeration	27	Kontrolle
enumeration	28	Belastungstransaktion - Berechtigung und Gutschriften bei Rueckzahlung (POB/PEB/WEB)
enumeration	29	Belastungstransaktion WEB mit Autoload
enumeration	30	WEB Buchung(Laden/Entladen)
enumeration	31	WEB-CI mit Autoload
enumeration	32	WEB-CO mit Autoload
enumeration	33	Kontrolle nach CI; BIBO oder Entwertung
enumeration	34	Check personal (CPKontrolldatensatz fuer Kontrollterminal)
enumeration	35	Auto CO
enumeration	36	manuelles CO (nachtraeglich durch den Nutzer)
enumeration	37	Ausgabe EFS ueber Aktionsliste
enumeration	38	Entsperrtransaktion EFS ueber Aktionsliste
enumeration	39	Rückgabetransaktion EFS ueber Aktionsliste
Used by	Elements	tns:TXALISBER_Type/tns:logTransaktionsTyp, tns:TXELISBER_Type/tns:logTransaktionsTyp, tns:TXRLISBER_Type/tns:logTransaktionsTyp
Source	<pre> <xs:simpleType name="NmTransaktionsTyp_CODE"> <xs:annotation> <xs:documentation>Der NmTransaktionsTyp_CODE klassifiziert Arten von Transaktionen, die mit Wertobjekten auf dem Nutzermedium auftreten</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Keine Angabe</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Auszugtransaktion - Applikation oder Berechtigung</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Entwertung</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="11"> <xs:annotation> <xs:documentation>CI</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="12"> <xs:annotation> <xs:documentation>CO</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="15"> <xs:annotation> </pre>	

```

<xs:documentation>Einzahlung - Berechtigung</xs:documentation>
</xs:annotation>
</xs:enumeration>
<xs:enumeration value="16">
<xs:annotation>
<xs:documentation>CI nach Fahrtfortsetzung</xs:documentation>
</xs:annotation>
</xs:enumeration>
<xs:enumeration value="18">
<xs:annotation>
<xs:documentation>NTP Aendern</xs:documentation>
</xs:annotation>
</xs:enumeration>
<xs:enumeration value="20">
<xs:annotation>
<xs:documentation>Sperrtransaktion Applikation oder Berechtigung</xs:documentation>
</xs:annotation>
</xs:enumeration>
<xs:enumeration value="21">
<xs:annotation>
<xs:documentation>Entsperrtransaktion Applikation oder Berechtigung</xs:documentation>
</xs:annotation>
</xs:enumeration>
<xs:enumeration value="22">
<xs:annotation>
<xs:documentation>BI</xs:documentation>
</xs:annotation>
</xs:enumeration>
<xs:enumeration value="23">
<xs:annotation>
<xs:documentation>BO</xs:documentation>
</xs:annotation>
</xs:enumeration>
<xs:enumeration value="24">
<xs:annotation>
<xs:documentation>INOUT</xs:documentation>
</xs:annotation>
</xs:enumeration>
<xs:enumeration value="25">
<xs:annotation>
<xs:documentation>Rueckgabetransaktion - Applikation oder Berechtigung</xs:documentation>
</xs:annotation>
</xs:enumeration>
<xs:enumeration value="27">
<xs:annotation>
<xs:documentation>Kontrolle</xs:documentation>
</xs:annotation>
</xs:enumeration>
<xs:enumeration value="28">
<xs:annotation>
<xs:documentation>Belastungstransaktion - Berechtigung und Gutschriften bei Rueckzahlung
(POB/PEB/WEB)</xs:documentation>
</xs:annotation>
</xs:enumeration>
<xs:enumeration value="29">
<xs:annotation>
<xs:documentation>Belastungstransaktion WEB mit Autoload</xs:documentation>
</xs:annotation>
</xs:enumeration>
<xs:enumeration value="30">
<xs:annotation>
<xs:documentation>WEB Buchung(Laden/Entladen)</xs:documentation>
</xs:annotation>
</xs:enumeration>
<xs:enumeration value="31">
<xs:annotation>
<xs:documentation>WEB-CI mit Autoload</xs:documentation>
</xs:annotation>
</xs:enumeration>
<xs:enumeration value="32">
<xs:annotation>
<xs:documentation>WEB-CO mit Autoload</xs:documentation>
</xs:annotation>
</xs:enumeration>
<xs:enumeration value="33">
<xs:annotation>
<xs:documentation>Kontrolle nach CI; BIBO oder Entwertung</xs:documentation>
</xs:annotation>
</xs:enumeration>
<xs:enumeration value="34">
<xs:annotation>
<xs:documentation>Check personal (CPKontrolldatensatz fuer Kontrollterminal)</
xs:documentation>

```


	<pre> </xs:annotation> </xs:enumeration> <xs:enumeration value="35"> <xs:annotation> <xs:documentation>Auto CO</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="36"> <xs:annotation> <xs:documentation>manuelle CO (nachtraeglich durch den Nutzer)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="37"> <xs:annotation> <xs:documentation>Ausgabe EFS ueber Aktionsliste</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="38"> <xs:annotation> <xs:documentation>Entsperrtransaktion EFS ueber Aktionsliste</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="39"> <xs:annotation> <xs:documentation>Rückgabetransaktion EFS ueber Aktionsliste</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd

Simple Type tns:CommonServiceResultCode

Namespace	http://vdv/ka/ion/2																									
Annotations	Dienstuebergreifende Ergebniscodes. In BOM Ablehnungstype_Code bis auf Fall "0". Dieser Typ ist nicht direkt eingebunden und dient der Vollstaendigkeit der Schnittstelle.																									
Diagram																										
Type	restriction of tns:INT1																									
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT1 • tns:CommonServiceResultCode 																									
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> <tr> <td>enumeration</td> <td>2</td> <td>Daten des SOAP Headers stimmen nicht mit den Transaktionsdaten der fachlichen Nachricht ueberein.</td> </tr> <tr> <td>enumeration</td> <td>3</td> <td>Falsche Senderrolle</td> </tr> <tr> <td>enumeration</td> <td>4</td> <td>Organisations-ID des Senders ist unbekannt</td> </tr> <tr> <td>enumeration</td> <td>5</td> <td>Die Organisation wurde durch den AH gesperrt</td> </tr> <tr> <td>enumeration</td> <td>8</td> <td>Transaktion betrifft gesperrtes Objekt</td> </tr> <tr> <td>enumeration</td> <td>9</td> <td>Falsche Referenz</td> </tr> <tr> <td>enumeration</td> <td>254</td> <td>Service/Transaktion wird nicht unterstuetzt</td> </tr> </table>	maxInclusive	255	minInclusive	0	enumeration	2	Daten des SOAP Headers stimmen nicht mit den Transaktionsdaten der fachlichen Nachricht ueberein.	enumeration	3	Falsche Senderrolle	enumeration	4	Organisations-ID des Senders ist unbekannt	enumeration	5	Die Organisation wurde durch den AH gesperrt	enumeration	8	Transaktion betrifft gesperrtes Objekt	enumeration	9	Falsche Referenz	enumeration	254	Service/Transaktion wird nicht unterstuetzt
maxInclusive	255																									
minInclusive	0																									
enumeration	2	Daten des SOAP Headers stimmen nicht mit den Transaktionsdaten der fachlichen Nachricht ueberein.																								
enumeration	3	Falsche Senderrolle																								
enumeration	4	Organisations-ID des Senders ist unbekannt																								
enumeration	5	Die Organisation wurde durch den AH gesperrt																								
enumeration	8	Transaktion betrifft gesperrtes Objekt																								
enumeration	9	Falsche Referenz																								
enumeration	254	Service/Transaktion wird nicht unterstuetzt																								
Source	<pre> <xs:simpleType name="CommonServiceResultCode"> <xs:annotation> <xs:documentation>Dienstuebergreifende Ergebniscodes. In BOM Ablehnungstype_Code bis auf Fall "0". Dieser Typ ist nicht direkt eingebunden und dient der Vollstaendigkeit der Schnittstelle.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <!-- <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Erfolgreich</xs:documentation> </xs:annotation> </xs:enumeration> --> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Daten des SOAP Headers stimmen nicht mit den Transaktionsdaten der fachlichen Nachricht ueberein.</xs:documentation> </xs:annotation> </pre>																									

	<pre> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Falsche Senderrolle</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation>Organisations-ID des Senders ist unbekannt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>Die Organisation wurde durch den AH gesperrt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="8"> <xs:annotation> <xs:documentation>Transaktion betrifft gesperrtes Objekt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="9"> <xs:annotation> <xs:documentation>Falsche Referenz</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="254"> <xs:annotation> <xs:documentation>Service/Transaktion wird nicht unterstuetzt</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd

Simple Type tns:OrtsTyp_CODE_Type

Namespace	http://vdv/ka/ion/2				
Annotations	Classifies locations, see Spec BOM, table 6-69. Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschräenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu können. Der semantische Check muss in der Software mit Hilfe der Aufzaehlung OrtsTypEnum_Type im entsprechenden Schema (XML-Schema_ION.Enums_ext-1.x.x.xsd) umgesetzt werden.				
Diagram					
Type	tns:INT1				
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT1 • tns:OrtsTyp_CODE_Type 				
Facets	<table> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	Element tns:Ort_ID_Type/ortTyp				
Source	<pre> <xs:simpleType name="OrtsTyp_CODE_Type"> <xs:annotation> <xs:documentation>Classifies locations, see Spec BOM, table 6-69. Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschräenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu können. Der semantische Check muss in der Software mit Hilfe der Aufzaehlung OrtsTypEnum_Type im entsprechenden Schema (XML-Schema_ION.Enums_ext-1.x.x.xsd) umgesetzt werden.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1" /> </xs:simpleType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd				

Simple Type tns:SAM_ID_Type

Namespace	http://vdv/ka/ion/2
-----------	---------------------

Annotations	Type: Eindeutiger Identifizierer eines Secure Application Module (SAM)				
Diagram					
Type	tns:ReferenceNumberThree				
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT3 • tns:ReferenceNumberThree • tns:SAM_ID_Type 				
Facets	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">maxInclusive</td><td style="padding: 2px;">16777215</td></tr> <tr> <td style="padding: 2px;">minInclusive</td><td style="padding: 2px;">0</td></tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Used by	Elements tns:TXSNAWA_Req_Type/samSperrkandidat, tns:TXSNAWB_Req_Type/samSperrkandidat				
Source	<pre><xs:simpleType name="SAM_ID_Type"> <xs:annotation> <xs:documentation>Type: Eindeutiger Identifizierer eines Secure Application Module (SAM)</xs:documentation> </xs:annotation> <xs:restriction base="ct:ReferenceNumberThree" /> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd				

Simple Type tns:Mitteilung_CODE_Type

Namespace	http://vdv/ka/ion/2								
Annotations	Typ: Mitteilung Codes BOM 6_40								
Diagram									
Type	restriction of xs:unsignedInt								
Facets	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">enumeration</td><td style="padding: 2px;">1</td></tr> <tr> <td style="padding: 2px;">enumeration</td><td style="padding: 2px;">2</td></tr> <tr> <td style="padding: 2px;">enumeration</td><td style="padding: 2px;">3</td></tr> <tr> <td style="padding: 2px;">enumeration</td><td style="padding: 2px;">4</td></tr> </table>	enumeration	1	enumeration	2	enumeration	3	enumeration	4
enumeration	1								
enumeration	2								
enumeration	3								
enumeration	4								
Used by	Element tns:TX_SMIT_Type/sperrEntscheidung								
Source	<pre><xs:simpleType name="Mitteilung_CODE_Type"> <xs:annotation> <xs:documentation>Typ: Mitteilung Codes BOM 6_40</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt" > <xs:enumeration value="1"/> <xs:enumeration value="2"/> <xs:enumeration value="3"/> <xs:enumeration value="4"/> </xs:restriction> </xs:simpleType></pre>								
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ion/2/XML-Schema_ION.xsd								

Simple Type tns:SperrlistenZyklusNummer_Type

Namespace	http://vdv/ka/ion/2
Annotations	<p>Die sperrlistenZyklusNummer ist eine streng Monoton aufsteigende Sequenznummer. Sie wird in einem festen konfigurierbaren Turnus zu einem bestimmten Zeitpunkt inkrementiert (z.B. 1 mal taeglich um 1:00 Uhr). Zu einer SperrlistenZyklusNummer werden alle Sperrobjektzustaende, die zu diesem Zeitpunkt im Kose System erfasst wurden, assoziert. Sie gilt Systemweit und ist nicht an Organisationen oder Rollen gebunden.</p> <p>Wird eine Differenzsperrliste unter Angabe der sperrlistenZyklusNummer angefordert, so werden alle Sperrobjektaenderungen zwischen dieser ZyklusNummer und der aktuellen ZyklusNummer uebertragen.</p>

Diagram					
Type	tns:INT4				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SperrlistenZyklusNummer_Type 				
Facets	<table> <tr> <td>maxInclusive</td> <td>4294967295</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Used by	Elements tns:TXSNAWA_Req_Type/zyklusNummer, tns:TXSNAWB_Req_Type/zyklusNummer				
Source	<pre><xs:simpleType name="SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die sperrlistenZyklusNummer ist eine streng Monoton aufsteigende Sequenznummer. Sie wird in einem festen konfigurierbaren Turnus zu einem bestimmten Zeitpunkt inkrementiert (z.B. 1 mal taeglich um 1:00 Uhr). Zu einer SperrlistenZyklusNummer werden alle Sperrobjectzustaende, die zu diesem Zeitpunkt im Kose System erfasst wurden, assoziiert. Sie gilt Systemweit und ist nicht an Organisationen oder Rollen gebunden. Wird eine Differenzsperrliste unter Angabe der sperrlistenZyklusNummer angefordert, so werden alle Sperrobjectaenderungen zwischen dieser ZyklusNummer und der aktuellen ZyklusNummer uebertragen.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT4" /> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Namespace: ""

Element(s)

Element tns:Terminal_ID_Type / terminalTyp

Namespace	No namespace				
Diagram					
Type	tns:TerminalTyp_CODE_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:TerminalTyp_CODE_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<xs:element name="terminalTyp" type="tns:TerminalTyp_CODE_Type" />				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:Terminal_ID_Type / terminalNummer

Namespace	No namespace				
Diagram					
Type	tns:ReferenceNumberTwo				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				

Source	<code><xss:element name="terminalNumber" type="ct:ReferenceNumberTwo" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:Terminal_ID_Type / terminalOwner_ID

Namespace	No namespace				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xss:element name="terminalOwner_ID" type="ka:Organisation_ID" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:Berechtigung_ID_Type / berechtigungNummer

Namespace	No namespace				
Diagram					
Type	tns:ReferenceNumberFour				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT4 tns:ReferenceNumberFour 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>4294967295</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Source	<code><xss:element name="berechtigungNummer" type="ct:ReferenceNumberFour" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:Berechtigung_ID_Type / kvp_ID


Namespace	No namespace				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xss:element name="kvp_ID" type="ka:Organisation_ID" /></code>				

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd
-----------------	-------------------------------------------------------------------------------------------------------------------------------------------------------

Element `tns:NmApplikationInstanz_ID_Type` / `NmAppInstanznummer`

Namespace	No namespace				
Diagram					
Type	tns:ReferenceNumberFour				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:ReferenceNumberFour 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>4294967295</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Source	<code><xss:element name="NmAppInstanznummer" type="ct:ReferenceNumberFour" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element `tns:NmApplikationInstanz_ID_Type` / `kvp_ID`

Namespace	No namespace				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xss:element name="kvp_ID" type="ka:Organisation_ID" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element `tns:EFMProdukt_ID_Type` / `produktNummer`

Namespace	No namespace						
Diagram							
Type	tns:ReferenceNumberTwo						
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo 						
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0		
maxInclusive	65535						
minInclusive	0						
Source	<code><xss:element name="produktNummer" type="ct:ReferenceNumberTwo" minOccurs="0" maxOccurs="1" /></code>						

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd
-----------------	-------------------------------------------------------------------------------------------------------------------------------------------------------

Element tns:EFMProdukt_ID_Type / organisationID

Namespace	No namespace
Diagram	
Type	tns:Organisation_ID
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT2 • tns:ReferenceNumberTwo • tns:Organisation_ID
Properties	content: simple
Facets	maxInclusive 65535 minInclusive 0
Source	<xs:element name="organisationID" type="ka:Organisation_ID"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TX_BASE_Type / txbase

Namespace	No namespace
Annotations	Fachliche Daten ueber die in der Transaktion involvierten Systeme
Diagram	
Type	tns:ION_TX_HEADER_Type
Properties	content: complex
Model	transAuftrag{0,1} , transEmpfaenger_ID , transEmpfaengerRolle , transStatus{0,1} , transTransaktion_ID , transTransaktionsTyp{0,1} , transTransaktionsZeitpunkt , transVersion{0,1} , transWiederholungsZaehler{0,1} , transSignaturTyp{0,1} , transSignaturZertifikat{0,1} , transSignatur{0,1}
Children	transAuftrag, transEmpfaengerRolle, transEmpfaenger_ID, transSignatur, transSignaturTyp, transSignaturZertifikat, transStatus, transTransaktion_ID, transTransaktionsTyp, transTransaktionsZeitpunkt, transVersion, transWiederholungsZaehler
Instance	<pre> <txbase> <transAuftrag>{0,1}</transAuftrag> <transEmpfaenger_ID>{1,1}</transEmpfaenger_ID> <transEmpfaengerRolle>{1,1}</transEmpfaengerRolle> <transStatus>{0,1}</transStatus> <transTransaktion_ID>{1,1}</transTransaktion_ID> </pre>

	<pre> <transTransaktionsTyp>{0,1}</transTransaktionsTyp> <transTransaktionsZeitpunkt>{1,1}</transTransaktionsZeitpunkt> <transVersion>{0,1}</transVersion> <transWiederholungsZaehler>{0,1}</transWiederholungsZaehler> <transSignaturTyp>{0,1}</transSignaturTyp> <transSignaturZertifikat>{0,1}</transSignaturZertifikat> <transSignatur>{0,1}</transSignatur> </txbase></pre>
Source	<pre> <xs:element name="txbase" type="tns:ION_TX_HEADER_Type"> <xs:annotation> <xs:documentation>Fachliche Daten ueber die in der Transaktion involvierten Systeme</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:ION_TX_HEADER_Type / transAuftrag

Namespace	No namespace						
Diagram							
Type	xs:string						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<pre><xs:element name="transAuftrag" type="xs:string" minOccurs="0" maxOccurs="1"/></pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element tns:ION_TX_HEADER_Type / transEmpfaenger_ID

Namespace	No namespace				
Annotations	Eindeutige OrganisationsId des Nachrichtenempfaengers				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt <ul style="list-style-type: none"> • tns:INT2 • tns:ReferenceNumberTwo • tns:Organisation_ID 				
Properties	content: simple				
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<pre> <xs:element name="transEmpfaenger_ID" type="ka:Organisation_ID"> <xs:annotation> <xs:documentation>Eindeutige OrganisationsId des Nachrichtenempfaengers</xs:documentation> </xs:annotation> </xs:element></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:ION_TX_HEADER_Type / transEmpfaengerRolle

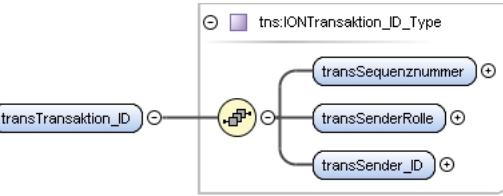
Namespace	No namespace
Annotations	Rolle des Nachrichtenempfaengers
Diagram	
Type	tns:KommunikationsParterRolle
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt

	<ul style="list-style-type: none"> • tns:INT1 • tns:KommunikationsParterRolle 																									
Properties	content: simple																									
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> <tr> <td>enumeration</td><td>0</td><td>Unbekannt</td></tr> <tr> <td>enumeration</td><td>1</td><td>KVP</td></tr> <tr> <td>enumeration</td><td>2</td><td>DL</td></tr> <tr> <td>enumeration</td><td>3</td><td>PV</td></tr> <tr> <td>enumeration</td><td>4</td><td>AH</td></tr> <tr> <td>enumeration</td><td>5</td><td>KOSES</td></tr> <tr> <td>enumeration</td><td>254</td><td>ZVM</td></tr> </table>	maxInclusive	255	minInclusive	0	enumeration	0	Unbekannt	enumeration	1	KVP	enumeration	2	DL	enumeration	3	PV	enumeration	4	AH	enumeration	5	KOSES	enumeration	254	ZVM
maxInclusive	255																									
minInclusive	0																									
enumeration	0	Unbekannt																								
enumeration	1	KVP																								
enumeration	2	DL																								
enumeration	3	PV																								
enumeration	4	AH																								
enumeration	5	KOSES																								
enumeration	254	ZVM																								
Source	<pre><xs:element name="transEmpfaengerRolle" type="ka:KommunikationsParterRolle"> <xs:annotation> <xs:documentation>Rolle des Nachrichtenempfaengers</xs:documentation> </xs:annotation> </xs:element></pre>																									
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd																									

Element tns:ION_TX_HEADER_Type / transStatus

Namespace	No namespace						
Diagram							
Type	tns:INT1						
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0		
maxInclusive	255						
minInclusive	0						
Source	<pre><xs:element name="transStatus" type="ct:INT1" minOccurs="0" maxOccurs="1" /></pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element tns:ION_TX_HEADER_Type / transTransaktion_ID

Namespace	No namespace
Diagram	
Type	tns:IONTransaktion_ID_Type
Properties	content: complex
Model	transSequenznummer , transSenderRolle , transSender_ID
Children	transSenderRolle, transSender_ID, transSequenznummer
Instance	<pre><transTransaktion_ID> <transSequenznummer>{1,1}</transSequenznummer> <transSenderRolle>{1,1}</transSenderRolle> <transSender_ID>{1,1}</transSender_ID> </transTransaktion_ID></pre>
Source	<pre><xs:element name="transTransaktion_ID" type="tns:IONTransaktion_ID_Type" /></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd
-----------------	-------------------------------------------------------------------------------------------------------------------------------------------------------

Element tns:IONTransaktion_ID_Type / transSequenznummer

Namespace	No namespace				
Diagram					
Type	tns:SequenceNumberFour				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT4 tns:SequenceNumberFour 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>4294967295</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Source	<xs:element name="transSequenznummer" type="ct:SequenceNumberFour"/>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:IONTransaktion_ID_Type / transSenderRolle


Namespace	No namespace																									
Diagram																										
Type	tns:KommunikationsParterRolle																									
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 tns:KommunikationsParterRolle 																									
Properties	content: simple																									
Facets	<table> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> <tr> <td>enumeration</td> <td>0</td> <td>Unbekannt</td> </tr> <tr> <td>enumeration</td> <td>1</td> <td>KVP</td> </tr> <tr> <td>enumeration</td> <td>2</td> <td>DL</td> </tr> <tr> <td>enumeration</td> <td>3</td> <td>PV</td> </tr> <tr> <td>enumeration</td> <td>4</td> <td>AH</td> </tr> <tr> <td>enumeration</td> <td>5</td> <td>KOSES</td> </tr> <tr> <td>enumeration</td> <td>254</td> <td>ZVM</td> </tr> </table>	maxInclusive	255	minInclusive	0	enumeration	0	Unbekannt	enumeration	1	KVP	enumeration	2	DL	enumeration	3	PV	enumeration	4	AH	enumeration	5	KOSES	enumeration	254	ZVM
maxInclusive	255																									
minInclusive	0																									
enumeration	0	Unbekannt																								
enumeration	1	KVP																								
enumeration	2	DL																								
enumeration	3	PV																								
enumeration	4	AH																								
enumeration	5	KOSES																								
enumeration	254	ZVM																								
Source	<xs:element name="transSenderRolle" type="ka:KommunikationsParterRolle"/>																									
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd																									

Element tns:IONTransaktion_ID_Type / transSender_ID

Namespace	No namespace
Diagram	
Type	tns:Organisation_ID
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT2 <ul style="list-style-type: none"> tns:ReferenceNumberTwo tns:Organisation_ID

Properties	content:	simple
Facets	maxInclusive	65535
	minInclusive	0
Source	<xss:element name="transSender_ID" type="ka:Organisation_ID"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd	

Element tns:ION_TX_HEADER_Type / transTransaktionsTyp

Namespace	No namespace						
Diagram							
Type	tns:INT1						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	255	minInclusive	0		
maxInclusive	255						
minInclusive	0						
Source	<xss:element name="transTransaktionsTyp" type="ct:INT1" minOccurs="0" maxOccurs="1"/>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element tns:ION_TX_HEADER_Type / transTransaktionsZeitpunkt

Namespace	No namespace
Annotations	Zeitpunkt der Dienstanfrage gemäss den Angaben der Dienstaufrufers. Achtung: Aufgrund von potentiell unsynchronisierten, lokalen Uhren der Kommunikationspartnern ist möglicherweise die Aussagekraft dieses Feldes sehr gering.
Diagram	
Type	tns:DateTime
Properties	content: simple
Source	<pre> <xss:element name="transTransaktionsZeitpunkt" type="ct:DateTime"> <xss:annotation> <xss:documentation>Zeitpunkt der Dienstanfrage gemäss den Angaben der Dienstaufrufers. Achtung: Aufgrund von potentiell unsynchronisierten, lokalen Uhren der Kommunikationspartnern ist möglicherweise die Aussagekraft dieses Feldes sehr gering.</xss:documentation> </xss:annotation> </xss:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:ION_TX_HEADER_Type / transVersion

Namespace	No namespace						
Diagram							
Type	tns:BitString16						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table border="1"> <tr> <td>length</td> <td>16</td> </tr> <tr> <td>pattern</td> <td>[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]</td> </tr> </table>	length	16	pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]		
length	16						
pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]						

Source	<code><xss:element name="transVersion" type="ct:BitString16" minOccurs="0" maxOccurs="1" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:ION_TX_HEADER_Type / transWiederholungsZaehler

Namespace	No namespace						
Diagram							
Type	tns:INT1						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	255	minInclusive	0		
maxInclusive	255						
minInclusive	0						
Source	<code><xss:element name="transWiederholungsZaehler" type="ct:INT1" minOccurs="0" maxOccurs="1" /></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element tns:ION_TX_HEADER_Type / transSignaturTyp

Namespace	No namespace						
Diagram							
Type	tns:INT1						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	255	minInclusive	0		
maxInclusive	255						
minInclusive	0						
Source	<code><xss:element name="transSignaturTyp" type="ct:INT1" minOccurs="0" maxOccurs="1" /></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element tns:ION_TX_HEADER_Type / transSignaturZertifikat

Namespace	No namespace						
Diagram							
Type	restriction of xs:hexBinary						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	length 378						
Source	<pre> <xss:element name="transSignaturZertifikat" minOccurs="0" maxOccurs="1"> <xss:simpleType> <xss:restriction base="xs:hexBinary"> <xss:length value="378" fixed="true" /> </xss:restriction> </xss:simpleType> </xss:element> </pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element tns:ION_TX_HEADER_Type / transSignatur

Namespace	No namespace
-----------	--------------

Diagram							
Type	tns:TransSignatur_Type						
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr> <td>length</td> <td>128</td> </tr> </table>	length	128				
length	128						
Source	<xs:element name="transSignatur" minOccurs="0" maxOccurs="1" type="tns:TransSignatur_Type"/>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element tns:SymSchluessel_ID_Type / schluesselNummer

Namespace	No namespace				
Diagram					
Type	tns:INT1				
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> </table>	content:	simple		
content:	simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<xs:element name="schluesselNummer" type="ct:INT1"/>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:SymSchluessel_ID_Type / schluesselVersion

Namespace	No namespace				
Diagram					
Type	tns:INT1				
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> </table>	content:	simple		
content:	simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<xs:element name="schluesselVersion" type="ct:INT1"/>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:SymSchluessel_ID_Type / schluesselInhaber_ID

Namespace	No namespace				
Diagram					
Type	tns:ReferenceNumberTwo				
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT2 • tns:ReferenceNumberTwo 				
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> </table>	content:	simple		
content:	simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<xs:element name="schluesselInhaber_ID" type="ct:ReferenceNumberTwo"/>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				


Element tns:TX_BER_Type / berGueltigkeitsbeginn

Namespace	No namespace
Diagram	
Type	tns:DateTimeCompact
Properties	content: simple
Facets	maxInclusive 2117-12-31T23:59:58 minInclusive 1990-01-01T00:00:00
Source	<xs:element name="berGueltigkeitsbeginn" type="ct:DateTimeCompact" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TX_BER_Type / berGueltigkeitsende

Namespace	No namespace
Diagram	
Type	tns:DateTimeCompact
Properties	content: simple
Facets	maxInclusive 2117-12-31T23:59:58 minInclusive 1990-01-01T00:00:00
Source	<xs:element name="berGueltigkeitsende" type="ct:DateTimeCompact" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TX_BER_Type / prodAbrechnungsVerfahren

Namespace	No namespace
Diagram	
Type	tns:Abrechnungsverfahren_CODE_Type
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt <ul style="list-style-type: none"> • tns:INT1 • tns:Abrechnungsverfahren_CODE_Type
Properties	content: simple
Facets	maxInclusive 255 minInclusive 0 enumeration 0 Keine Angabe enumeration 1 Pre-Paid enumeration 2 Post-Paid enumeration 3 Trip-Paid
Source	<xs:element name="prodAbrechnungsVerfahren" type="tns:Abrechnungsverfahren_CODE_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TX_BER_Type / berBezahlArt

Namespace	No namespace
Diagram	
Type	tns:Bezahlart_CODE_Type
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt

	<ul style="list-style-type: none"> • tns:INT1 • tns:Bezahlart_CODE_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<xs:element name="berBezahlArt" type="tns:Bezahlart_CODE_Type" />				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TX_BER_Type / berBezahlMittel

Namespace	No namespace
Diagram	
Type	tns:OctetString10
Properties	content: simple
Facets	length 10
Source	<xs:element name="berBezahlMittel" type="ct:OctetString10" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXAS_Type / transSendeAuftrag

Namespace	No namespace						
Diagram							
Type	restriction of tns:PrintableString						
Type hierarchy	<ul style="list-style-type: none"> • xs:string • tns:PrintableString 						
Properties	content: simple						
Facets	<table> <tr> <td>minLength</td><td>0</td></tr> <tr> <td>maxLength</td><td>10</td></tr> <tr> <td>pattern</td><td>[-þ]*</td></tr> </table>	minLength	0	maxLength	10	pattern	[-þ]*
minLength	0						
maxLength	10						
pattern	[-þ]*						
Source	<pre> <xs:element name="transSendeAuftrag"> <xs:simpleType> <xs:restriction base="tns:PrintableString"> <xs:minLength value="0"/> <xs:maxLength value="10"/> </xs:restriction> </xs:simpleType> </xs:element> </pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element tns:TXAS_Type / transSendeAuftragstyp

Namespace	No namespace
Diagram	
Type	tns:AuftragsTyp_CODE
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT1 • tns:AuftragsTyp_CODE
Properties	content: simple

Facets	maxInclusive	255
	minInclusive	0
Source	<xs:element name="transSendeAuftragstyp" type="tns:AuftragsTyp_CODE"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd	


Element tns:VX_Message_Type / StatusCode

Namespace	No namespace																																
Diagram																																	
Type	tns:StatusCode																																
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT1 • tns:StatusCode 																																
Properties	content: simple																																
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> <tr> <td>enumeration</td> <td>0</td> <td>Die Nachricht wurde erfolgreich entgegengenommen und alle notwendigen Informationen zur Weiterleitung liegen vor.</td> </tr> <tr> <td>enumeration</td> <td>1</td> <td>Ungültige Nachricht. Die Sender ID oder die Routing Information kann nicht aus dem SOAP Header extrahiert werden.</td> </tr> <tr> <td>enumeration</td> <td>2</td> <td>Ungleiche Sender ID. Die Sender ID, die im SOAP Header uebertragen wurde passt nicht zu der Sender ID, die in der VM zum Zertifikat des Senders hinterlegt wurde.</td> </tr> <tr> <td>enumeration</td> <td>3</td> <td>Unbekannter oder gesperrter Empfaenger oder zu den Routing Informationen ist in der VM keine technische Empfaengeradresse hinterlegt.</td> </tr> <tr> <td>enumeration</td> <td>4</td> <td>Verbindungsproblem zum Empfaenger. Es konnte keine Verbindung zum Empfaenger aufgebaut werden.</td> </tr> <tr> <td>enumeration</td> <td>5</td> <td>Timeout. Der Empfaenger antwortet nicht in einer vorgegebenen Zeit.</td> </tr> <tr> <td>enumeration</td> <td>6</td> <td>Die asynchrone Nachricht kann nicht zwischengespeichert werden.</td> </tr> <tr> <td>enumeration</td> <td>7</td> <td>Die Organisations-ID des Senders ist gesperrt oder der Vermittlungsstelle nicht bekannt.</td> </tr> <tr> <td>enumeration</td> <td>255</td> <td>Technisches Problem. Es liegt ein technisches Problem vor. Die Nachricht konnte nicht erfolgreich entgegengenommen werden.</td> </tr> </table>		maxInclusive	255	minInclusive	0	enumeration	0	Die Nachricht wurde erfolgreich entgegengenommen und alle notwendigen Informationen zur Weiterleitung liegen vor.	enumeration	1	Ungültige Nachricht. Die Sender ID oder die Routing Information kann nicht aus dem SOAP Header extrahiert werden.	enumeration	2	Ungleiche Sender ID. Die Sender ID, die im SOAP Header uebertragen wurde passt nicht zu der Sender ID, die in der VM zum Zertifikat des Senders hinterlegt wurde.	enumeration	3	Unbekannter oder gesperrter Empfaenger oder zu den Routing Informationen ist in der VM keine technische Empfaengeradresse hinterlegt.	enumeration	4	Verbindungsproblem zum Empfaenger. Es konnte keine Verbindung zum Empfaenger aufgebaut werden.	enumeration	5	Timeout. Der Empfaenger antwortet nicht in einer vorgegebenen Zeit.	enumeration	6	Die asynchrone Nachricht kann nicht zwischengespeichert werden.	enumeration	7	Die Organisations-ID des Senders ist gesperrt oder der Vermittlungsstelle nicht bekannt.	enumeration	255	Technisches Problem. Es liegt ein technisches Problem vor. Die Nachricht konnte nicht erfolgreich entgegengenommen werden.
maxInclusive	255																																
minInclusive	0																																
enumeration	0	Die Nachricht wurde erfolgreich entgegengenommen und alle notwendigen Informationen zur Weiterleitung liegen vor.																															
enumeration	1	Ungültige Nachricht. Die Sender ID oder die Routing Information kann nicht aus dem SOAP Header extrahiert werden.																															
enumeration	2	Ungleiche Sender ID. Die Sender ID, die im SOAP Header uebertragen wurde passt nicht zu der Sender ID, die in der VM zum Zertifikat des Senders hinterlegt wurde.																															
enumeration	3	Unbekannter oder gesperrter Empfaenger oder zu den Routing Informationen ist in der VM keine technische Empfaengeradresse hinterlegt.																															
enumeration	4	Verbindungsproblem zum Empfaenger. Es konnte keine Verbindung zum Empfaenger aufgebaut werden.																															
enumeration	5	Timeout. Der Empfaenger antwortet nicht in einer vorgegebenen Zeit.																															
enumeration	6	Die asynchrone Nachricht kann nicht zwischengespeichert werden.																															
enumeration	7	Die Organisations-ID des Senders ist gesperrt oder der Vermittlungsstelle nicht bekannt.																															
enumeration	255	Technisches Problem. Es liegt ein technisches Problem vor. Die Nachricht konnte nicht erfolgreich entgegengenommen werden.																															
Source	<xs:element name="StatusCode" type="tns:StatusCode"/>																																
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd																																


Element tns:VX_Message_Type / StatusText

Namespace	No namespace	
Diagram		
Type	tns:StatusText	
Properties	content: simple	
Facets	maxLength	255
Source	<xs:element name="StatusText" type="tns:StatusText"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd	

Element `tns:Ort_ID_Type` / `ortTyp`

Namespace	No namespace				
Diagram					
Type	<code>tns:OrtsTyp_CODE_Type</code>				
Type hierarchy	<ul style="list-style-type: none"> <code>xs:unsignedInt</code> <code>tns:INT1</code> <code>tns:OrtsTyp_CODE_Type</code> 				
Properties	content: simple				
Facets	<table> <tr> <td><code>maxInclusive</code></td><td>255</td></tr> <tr> <td><code>minInclusive</code></td><td>0</td></tr> </table>	<code>maxInclusive</code>	255	<code>minInclusive</code>	0
<code>maxInclusive</code>	255				
<code>minInclusive</code>	0				
Source	<code><xss:element name="ortTyp" type="tns:OrtsTyp_CODE_Type"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element `tns:Ort_ID_Type` / `ortNummer`

Namespace	No namespace				
Diagram					
Type	<code>tns:ReferenceNumberThree</code>				
Type hierarchy	<ul style="list-style-type: none"> <code>xs:unsignedInt</code> <code>tns:INT3</code> <code>tns:ReferenceNumberThree</code> 				
Properties	content: simple				
Facets	<table> <tr> <td><code>maxInclusive</code></td><td>16777215</td></tr> <tr> <td><code>minInclusive</code></td><td>0</td></tr> </table>	<code>maxInclusive</code>	16777215	<code>minInclusive</code>	0
<code>maxInclusive</code>	16777215				
<code>minInclusive</code>	0				
Source	<code><xss:element name="ortNummer" type="ct:ReferenceNumberThree"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element `tns:Ort_ID_Type` / `ortDomaene_ID`

Namespace	No namespace				
Diagram					
Type	<code>tns:Organisation_ID</code>				
Type hierarchy	<ul style="list-style-type: none"> <code>xs:unsignedInt</code> <code>tns:INT2</code> <code>tns:ReferenceNumberTwo</code> <code>tns:Organisation_ID</code> 				
Properties	content: simple				
Facets	<table> <tr> <td><code>maxInclusive</code></td><td>65535</td></tr> <tr> <td><code>minInclusive</code></td><td>0</td></tr> </table>	<code>maxInclusive</code>	65535	<code>minInclusive</code>	0
<code>maxInclusive</code>	65535				
<code>minInclusive</code>	0				
Source	<code><xss:element name="ortDomaene_ID" type="ka:Organisation_ID"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element `tns:Transaktionsdatensatz_Type` / `Transaktionsdaten`

Namespace	No namespace
-----------	--------------

Diagram	
Type	xs:hexBinary
Properties	content: simple
Source	<xs:element name="Transaktionsdaten" type="xs:hexBinary" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:ASymSchluessel_ID_Type / signaturSchluessel

Namespace	No namespace
Diagram	
Type	tns:OctetString12
Properties	content: simple
Facets	length 12
Source	<xs:element name="signaturSchluessel" type="ct:OctetString12" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element tns:appNmTransaktionMAC_Type / appMAC_AH

Namespace	No namespace
Diagram	
Type	tns:OctetString8
Properties	content: simple
Facets	length 8
Source	<xs:element name="appMAC_AH" type="ct:OctetString8" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:appNmTransaktionMAC_Type / appMAC_KVP

Namespace	No namespace
Diagram	
Type	tns:OctetString8
Properties	content: simple
Facets	length 8
Source	<xs:element name="appMAC_KVP" type="ct:OctetString8" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:appNmTransaktionMAC_Type / appMAC_AH_Schluessel_ID

Namespace	No namespace
Diagram	
Type	tns:SymSchluessel_ID_Type

Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><appMAC_AH_Schluessel_ID> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </appMAC_AH_Schluessel_ID></pre>
Source	<code><x:element name="appMAC_AH_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:appNmTransaktionMAC_Type / appMAC_KVP_Schluessel_ID

Namespace	No namespace
Diagram	<pre> classDiagram class appMAC_KVP_Schluessel_ID { <<tns:SymSchluessel_ID_Type>> schluesselNummer schluesselVersion schluesselInhaber_ID } <<tns:SymSchluessel_ID_Type>> appMAC_KVP_Schluessel_ID < -- SymSchluessel_ID_Type SymSchluessel_ID_Type { <<tns:SymSchluessel_ID_Type>> <<tns:SymSchluessel_ID_Type>> <<tns:SymSchluessel_ID_Type>> } </pre>
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><appMAC_KVP_Schluessel_ID> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </appMAC_KVP_Schluessel_ID></pre>
Source	<code><x:element name="appMAC_KVP_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:berNmTransaktionMAC_Type / berMAC_PV

Namespace	No namespace
Diagram	<pre> classDiagram class berMAC_PV { <<ct:OctetString8>> } <<ct:OctetString8>> berMAC_PV < -- OctetString8 </pre>
Type	tns:OctetString8
Properties	content: simple
Facets	length 8
Source	<code><x:element name="berMAC_PV" type="ct:OctetString8"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:berNmTransaktionMAC_Type / berMAC_KVP

Namespace	No namespace
Diagram	<pre> classDiagram class berMAC_KVP { <<ct:OctetString8>> } <<ct:OctetString8>> berMAC_KVP < -- OctetString8 </pre>
Type	tns:OctetString8
Properties	content: simple
Facets	length 8
Source	<code><x:element name="berMAC_KVP" type="ct:OctetString8"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:berNmTransaktionMAC_Type / berMAC_PV_Schluessel_ID

Namespace	No namespace
Diagram	<pre> classDiagram class tns:SymSchluessel_ID_Type { schluesselNummer schluesselVersion schluesselInhaber_ID } class berMAC_PV_Schluessel_ID { <--> tns:SymSchluessel_ID_Type } </pre>
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<berMAC_PV_Schluessel_ID> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </berMAC_PV_Schluessel_ID>
Source	<xs:element name="berMAC_PV_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:berNmTransaktionMAC_Type / berMAC_KVP_Schluessel_ID

Namespace	No namespace
Diagram	<pre> classDiagram class tns:SymSchluessel_ID_Type { schluesselNummer schluesselVersion schluesselInhaber_ID } class berMAC_KVP_Schluessel_ID { <--> tns:SymSchluessel_ID_Type } </pre>
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<berMAC_KVP_Schluessel_ID> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </berMAC_KVP_Schluessel_ID>
Source	<xs:element name="berMAC_KVP_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TX_RET_Type / transOrigID

Namespace	No namespace
Diagram	<pre> classDiagram class tns:IONTransaktion_ID_Type { transSequenznummer transSenderRolle transSender_ID } class transOrigID { <--> tns:IONTransaktion_ID_Type } </pre>
Type	tns:IONTransaktion_ID_Type
Properties	content: complex
Model	transSequenznummer , transSenderRolle , transSender_ID

Children	transSenderRolle, transSender_ID, transSequenznummer
Instance	<pre><transOrigIDs> <transSequenznummer>{1,1}</transSequenznummer> <transSenderRolle>{1,1}</transSenderRolle> <transSender_ID>{1,1}</transSender_ID> </transOrigID></pre>
Source	<code><xs:element name="transOrigID" type="tns:IONTransaktion_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

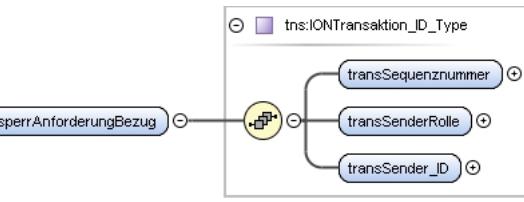
Element tns:TX_RET_Type / transOrigSignatur

Namespace	No namespace						
Diagram							
Type	tns:TransSignatur_Type						
Properties	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">content:</td> <td style="padding: 2px;">simple</td> </tr> <tr> <td style="padding: 2px;">minOccurs:</td> <td style="padding: 2px;">0</td> </tr> <tr> <td style="padding: 2px;">maxOccurs:</td> <td style="padding: 2px;">1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">length</td> <td style="padding: 2px;">128</td> </tr> </table>	length	128				
length	128						
Source	<code><xs:element name="transOrigSignatur" minOccurs="0" maxOccurs="1" type="tns:TransSignatur_Type" /></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element tns:TX_RET_Type / transOriginalZeit

Namespace	No namespace		
Diagram			
Type	xs:dateTime		
Properties	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">content:</td> <td style="padding: 2px;">simple</td> </tr> </table>	content:	simple
content:	simple		
Source	<code><xs:element name="transOriginalZeit" type="xs:dateTime" /></code>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd		

Element tns:TX_SMIT_Type / sperrAnforderungBezug

Namespace	No namespace		
Diagram			
Type	tns:IONTransaktion_ID_Type		
Properties	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">content:</td> <td style="padding: 2px;">complex</td> </tr> </table>	content:	complex
content:	complex		
Model	transSequenznummer, transSenderRolle, transSender_ID		
Children	transSenderRolle, transSender_ID, transSequenznummer		
Instance	<pre><sperrAnforderungBezug> <transSequenznummer>{1,1}</transSequenznummer> <transSenderRolle>{1,1}</transSenderRolle> <transSender_ID>{1,1}</transSender_ID> </sperrAnforderungBezug></pre>		
Source	<code><xs:element name="sperrAnforderungBezug" type="tns:IONTransaktion_ID_Type" /></code>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd		

Element tns:TX_SMIT_Type / sperrEntscheidung

Namespace	No namespace
Diagram	
Type	tns:Mitteilung_CODE_Type
Properties	content: simple
Facets	enumeration 1 enumeration 2 enumeration 3 enumeration 4
Source	<xs:element name="sperrEntscheidung" type="tns:Mitteilung_CODE_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TX_SANF_Type / sperrSperrgrund

Namespace	No namespace
Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255 minInclusive 0
Source	<xs:element name="sperrSperrgrund" type="ct:INT1" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element tns:TXA_Type / transAblehnungGrund

Namespace	No namespace
Annotations	<p>WICHTIG: Aus Historischen Gruenden ist TXA_Type ein allgemeiner Typ, der von allen teilnehmenden Systemen genutzt wird. Das fuehrt dazu, dass sich alle Systeme dieselben 'transAblehnungGrund' Fehlercodes teilen. Dies ist suboptimal, da, wann immer sich einer der 'transAblehnungGrund' Fehlercodes veraendert, alle teilnehmenden Systeme angepasst, getestet und in einer neuen Version zur Verfuegung gestellt werden muessten. Um TXA wie bisher weiterverwenden zu koennen, und um das beschriebene Abhaengigkeitsproblem zu vermeiden, wurde dieses Feld nicht mit expliziter Aufzaehlung der moeglichen Fehlercodes, sondern mit einem simplen numerischen Typen versehen. Die genauen Fehlercodes sind der Schnittstelle des jeweiligen konkreten teilnehmenden Systems zu entnehmen. Die Codes 0 bis 9 (einschliesslich) sind fuer allgemeine Fehler reserviert und duerfen von den teilnehmenden Systemen nur fuer die vorgesehene Semantik verwendet werden (siehe Typ 'CommonServiceResultCode'). Es wird empfohlen, fuer die Vollstaendigkeit der Schnittstelle, in den XSDs des jeweiligen Systems einen Aufzaehlungstypen vom Basistypen 'ct:INT1' mit den jeweiligen Fehlercodes des Systems zu definieren.</p>
Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255 minInclusive 0
Source	<pre><xs:element name="transAblehnungGrund" type="ct:INT1"> <xs:annotation> <xs:documentation>WICHTIG: Aus Historischen Gruenden ist TXA_Type ein allgemeiner Typ, der von allen teilnehmenden Systemen genutzt wird. Das fuehrt dazu, dass sich alle Systeme dieselben 'transAblehnungGrund' Fehlercodes teilen. Dies ist suboptimal, da, wann immer sich einer der 'transAblehnungGrund' Fehlercodes veraendert, alle teilnehmenden Systeme angepasst,</pre>

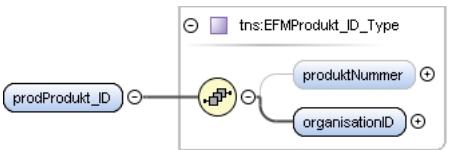
getestet und in einer neuen Version zur Verfuegung gestellt werden muessten. Um TXA wie bisher weiterverwenden zu koennen, und um das beschriebene Abhaengigkeitsproblem zu vermeiden, wurde dieses Feld nicht mit expliziter Aufzaehlung der moeglichen Fehlercodes, sondern mit einem simplen numerischen Typen versehen. Die genauen Fehlercodes sind der Schnittstelle des jeweiligen konkreten teilnehmenden Systems zu entnehmen. Die Codes 0 bis 9 (einschliesslich) sind fuer allgemeine Fehler reserviert und duerfen von den teilnehmenden Systemen nur fuer die vorgesehene Semantik verwendet werden (siehe Typ 'CommonServiceresultCode'). Es wird empfohlen, fuer die Vollstaendigkeit der Schnittstelle, in den XSDs des jeweiligen Systems einen Aufzaehlungstypen vom Basistypen 'ct:INT1' mit den jeweiligen Fehlercodes des Systems zu definieren.</xs:documentation>
</xs:annotation>
</xs:elements>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd
-----------------	-------------------------------------------------------------------------------------------------------------------------------------------------------

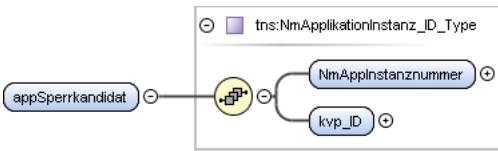
Element tns:TXDEABER_Req_Type / prodAkzeptanzEnde

Namespace	No namespace
Diagram	
Type	tns:Date
Properties	content: simple
Source	<xs:element name="prodAkzeptanzEnde" type="ct:Date" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXDEABER_Req_Type / prodProdukt_ID

Namespace	No namespace
Diagram	
Type	tns:EFMProdukt_ID_Type
Properties	content: complex
Model	produktNummer{0,1} , organisationID
Children	organisationID, produktNummer
Instance	<prodProdukt_ID><produktNummer>{0,1}</produktNummer><organisationID>{1,1}</organisationID></prodProdukt_ID>
Source	<xs:element name="prodProdukt_ID" type="tns:EFMProdukt_ID_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSMITA_Type / appSperrkandidat

Namespace	No namespace
Diagram	
Type	tns:NmApplikationInstanz_ID_Type
Properties	content: complex nillable: false
Model	NmAppInstanznummer , kvp_ID
Children	NmAppInstanznummer, kvp_ID
Instance	<appSperrkandidat><NmAppInstanznummer>{1,1}</NmAppInstanznummer>

	<pre><kvp_ID>{1,1}</kvp_ID> </appSperrkandidat></pre>
Source	<code><xs:element name="appSperrkandidat" type="tns:NmApplikationInstanz_ID_Type" nillable="false"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSANFSYMK_Type / keySperrkandidatsym

Namespace	No namespace
Diagram	<pre> classDiagram class keySperrkandidatsym class SymSchluessel_ID_Type { <<tns:SymSchluessel_ID_Type>> <<schluesselNummer>> <<schluesselVersion>> <<schluesselinhaber_ID>> } keySperrkandidatsym --> SymSchluessel_ID_Type </pre>
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselinhaber_ID
Children	schluesselinhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre> <keySperrkandidatsym> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselinhaber_ID>{1,1}</schluesselinhaber_ID> </keySperrkandidatsym> </pre>
Source	<code><xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSANFASYMK_Type / keySperrkandidatasym


Namespace	No namespace
Diagram	<pre> classDiagram class keySperrkandidatasym class ASymSchluessel_ID_Type { <<tns:ASymSchluessel_ID_Type>> <<signaturSchluessel>> } keySperrkandidatasym --> ASymSchluessel_ID_Type </pre>
Type	tns:ASymSchluessel_ID_Type
Properties	content: complex
Model	signaturSchluessel
Children	signaturSchluessel
Instance	<pre> <keySperrkandidatasym> <signaturSchluessel>{1,1}</signaturSchluessel> </keySperrkandidatasym> </pre>
Source	<code><xs:element name="keySperrkandidatasym" type="tns:ASymSchluessel_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSFREIMITSYMK_Type / keySperrkandidatsym

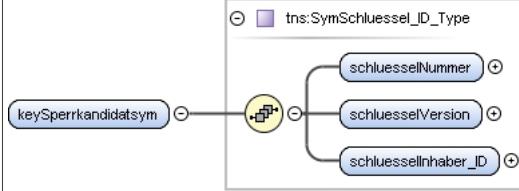
Namespace	No namespace
Diagram	<pre> classDiagram class keySperrkandidatsym class SymSchluessel_ID_Type { <<tns:SymSchluessel_ID_Type>> <<schluesselNummer>> <<schluesselVersion>> <<schluesselinhaber_ID>> } keySperrkandidatsym --> SymSchluessel_ID_Type </pre>
Type	tns:SymSchluessel_ID_Type
Properties	content: complex

Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><keySperrkandidatsym> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </keySperrkandidatsym></pre>
Source	<code><xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element tns:TXSFREIMITASYMK_Type / keySperrkandidatsym

Namespace	No namespace
Diagram	
Type	tns:ASymSchluessel_ID_Type
Properties	content: complex
Model	signaturSchluessel
Children	signaturSchluessel
Instance	<pre><keySperrkandidatsym> <signaturSchluessel>{1,1}</signaturSchluessel> </keySperrkandidatsym></pre>
Source	<code><xs:element name="keySperrkandidatsym" type="tns:ASymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSMITSYMK_Type / keySperrkandidatsym

Namespace	No namespace
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><keySperrkandidatsym> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </keySperrkandidatsym></pre>
Source	<code><xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSMITASYMK_Type / keySperrkandidatsym

Namespace	No namespace
Diagram	

Type	tns:ASymSchluessel_ID_Type
Properties	content: complex
Model	signaturSchluessel
Children	signaturSchluessel
Instance	<keySperrkandidatasym> <signaturSchluessel>{1,1}</signaturSchluessel> </keySperrkandidatasym>
Source	<xs:element name="keySperrkandidatasym" type="tns:ASymSchluessel_ID_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSNAWA_Req_Type / samSperrkandidat

Namespace	No namespace				
Diagram					
Type	tns:SAM_ID_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree tns:SAM_ID_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>16777215</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Source	<xs:element name="samSperrkandidat" type="tns:SAM_ID_Type"/>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TXSNAWA_Req_Type / orgSperrkandidat


Namespace	No namespace				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<xs:element name="orgSperrkandidat" type="ka:Organisation_ID"/>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TXSNAWA_Req_Type / zyklusNummer

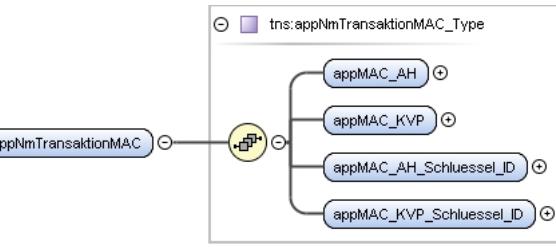
Namespace	No namespace
Annotations	<p>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</p>

Diagram					
Type	tns:SperrlistenZyklusNummer_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SperrlistenZyklusNummer_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Source	<pre><xs:element name="zyklusNummer" type="tns:SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</xs:documentation> </xs:annotation> </xs:element></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TXSNAWA_Req_Type / sperrtransaktionApplikation

Namespace	No namespace
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><sperrtransaktionApplikation> <Transaktionsdaten>{1,1}</Transaktionsdaten> </sperrtransaktionApplikation></pre>
Source	<xs:element name="sperrtransaktionApplikation" type="tns:Transaktionsdatensatz_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSNAWA_Req_Type / appNmTransaktionMAC

Namespace	No namespace
Diagram	
Type	tns:appNmTransaktionMAC_Type
Properties	content: complex
Model	appMAC_AH , appMAC_KVP , appMAC_AH_Schluessel_ID , appMAC_KVP_Schluessel_ID
Children	appMAC_AH, appMAC_AH_Schluessel_ID, appMAC_KVP, appMAC_KVP_Schluessel_ID
Instance	<pre><appNmTransaktionMAC> <appMAC_AH>{1,1}</appMAC_AH> <appMAC_KVP>{1,1}</appMAC_KVP> <appMAC_AH_Schluessel_ID>{1,1}</appMAC_AH_Schluessel_ID></pre>

	<pre><appMAC_KVP_Schluessel_ID>{1,1}</appMAC_KVP_Schluessel_ID> </appNmTransaktionMAC></pre>
Source	<pre><xs:element name="appNmTransaktionMAC" type="tns:appNmTransaktionMAC_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSNAWB_Req_Type / samSperrkandidat

Namespace	No namespace				
Diagram					
Type	tns:SAM_ID_Type				
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt <ul style="list-style-type: none"> • tns:INT3 • tns:ReferenceNumberThree • tns:SAM_ID_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>16777215</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Source	<pre><xs:element name="samSperrkandidat" type="tns:SAM_ID_Type" /></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TXSNAWB_Req_Type / orgSperrkandidat

Namespace	No namespace				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt <ul style="list-style-type: none"> • tns:INT2 • tns:ReferenceNumberTwo • tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<pre><xs:element name="orgSperrkandidat" type="ka:Organisation_ID" /></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TXSNAWB_Req_Type / zyklusNummer

Namespace	No namespace
Annotations	<p>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</p>
Diagram	
Type	tns:SperrlistenZyklusNummer_Type
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt <ul style="list-style-type: none"> • tns:INT4

	<ul style="list-style-type: none"> • tns:SperrlistenZyklusNummer_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Source	<pre><xs:element name="zyklusNummer" type="tns:SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</xs:documentation> </xs:annotation> </xs:element></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TXSNAWB_Req_Type / sperrtransaktionBerechtigung

Namespace	No namespace
Diagram	<pre> classDiagram class sperrtransaktionBerechtigung class Transaktionsdatensatz_Type sperrtransaktionBerechtigung "0..1" -- "1..1" Transaktionsdatensatz_Type </pre>
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><sperrtransaktionBerechtigung> <Transaktionsdaten>{1,1}</Transaktionsdaten> </sperrtransaktionBerechtigung></pre>
Source	<pre><xs:element name="sperrtransaktionBerechtigung" type="tns:Transaktionsdatensatz_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSNAWB_Req_Type / berNmTransaktionMAC

Namespace	No namespace
Diagram	<pre> classDiagram class berNmTransaktionMAC class berMAC_PV class berMAC_KVP class berMAC_PV_Schluessel_ID class berMAC_KVP_Schluessel_ID berNmTransaktionMAC "0..1" -- "1..1" berMAC_PV berNmTransaktionMAC "0..1" -- "1..1" berMAC_KVP berNmTransaktionMAC "0..1" -- "1..1" berMAC_PV_Schluessel_ID berNmTransaktionMAC "0..1" -- "1..1" berMAC_KVP_Schluessel_ID </pre>
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schluessel_ID , berMAC_KVP_Schluessel_ID
Children	berMAC_KVP, berMAC_KVP_Schluessel_ID, berMAC_PV, berMAC_PV_Schluessel_ID
Instance	<pre><berNmTransaktionMAC> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schluessel_ID>{1,1}</berMAC_PV_Schluessel_ID> <berMAC_KVP_Schluessel_ID>{1,1}</berMAC_KVP_Schluessel_ID> </berNmTransaktionMAC></pre>
Source	<pre><xs:element name="berNmTransaktionMAC" type="tns:berNmTransaktionMAC_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd