

Schema documentation for XML- Schema_KVP_DL_PV_ext-1.3.0.xsd

march 9, 2023

Table of Contents

Resource hierarchy:	7
Namespace: "http://vdv/ka/kvp-dl-pv/2"	7
Schema(s)	7
Main schema XML-Schema_KVP_DL_PV_ext-1.3.0.xsd	7
Included schema XML-Schema_KVP_DL_PV.xsd	7
Element(s)	7
Element tns:TXAEBER_Type_1_3_0 / tns:tx_ber	7
Element tns:TXAEBER_Type_1_3_0 / tns:berechtigungTarifbereichDaten	8
Element tns:TXAEBER_Type_1_3_0 / tns:berBerechtigung_ID	8
Element tns:TXAEBER_Type_1_3_0 / tns:prodProdukt_ID	8
Element tns:TXAEBER_1_3_0	9
Element tns:NmTransaktion_ID_Type / tns:samSequenznummer	10
Element tns:NmTransaktion_ID_Type / tns:SAM_ID.samNummer	10
Element tns:Mitnahme_Type / tns:mitnahmeTyp	10
Element tns:Mitnahme_Type / tns:mitnahmeAnzahl	11
Element tns:Linie_ID_Type / tns:linienNummer	11
Element tns:Linie_ID_Type / tns:linieDomaene_ID	11
Element tns:LinieVariante_ID_Type / tns:variantenNummer	12
Element tns:LinieVariante_ID_Type / tns:linie_ID	12
Element tns:Fahrt_ID_Type / tns:fahrtNummer	12
Element tns:Fahrt_ID_Type / tns:fahrtBetreiber_ID	13
Element tns:EFSVlaOrtsListe_Type / tns:efsVlaort_ID	13
Element tns:TX_PP_Type / tns:ppLeistungsPreis	13
Element tns:TX_PP_Type / tns:ppMehrwertsteuer	14
Element tns:TX_BERLOG_Type / tns:berLogLinieVariante_ID	14
Element tns:TX_BERLOG_Type / tns:berLogFahrt_ID	14
Element tns:TX_LOG_Type / tns:logTransaktionsoperator_ID	15
Element tns:TX_LOG_Type / tns:logTransaktionszeitpunkt_ID	15
Element tns:TX_LOG_Type / tns:logTransaktionsort_ID	15
Element tns:TX_LOG_Type / tns:logTransaktionsTyp_ID	16
Element tns:TX_AFBLOG_Type / tns:afbLogFahrgastTyp	16
Element tns:TX_AFBLOG_Type / tns:afbLogVerkehrsmittelart	17
Element tns:TX_AFBLOG_Type / tns:afbLogServiceKlasse	17
Element tns:TX_AFBLOG_Type / tns:afbLogDynamischerRabattParameter	18
Element tns:TX_AFBLOG_Type / tns:afbLogMitnahme	18
Element tns:TX_AFBLOG_Type / tns:txberlog	18
Element tns:TX_AFBLOG_Type / tns:txlog	19
Element tns:TX_EFSLOG_Type / tns:efsFahrgastTyp	19
Element tns:TX_EFSLOG_Type / tns:efsVerkehrsmittelKategorie	20
Element tns:TX_EFSLOG_Type / tns:efsLogServiceKlasse	20
Element tns:TX_EFSLOG_Type / tns:efsServiceKlasseExtra	20
Element tns:TX_EFSLOG_Type / tns:efsStartort_ID	21
Element tns:TX_EFSLOG_Type / tns:efsZielort_ID	21
Element tns:TX_EFSLOG_Type / tns:efsViaOrte_IDs	22
Element tns:TX_EFSLOG_Type / tns:efsLogMitnahme	22
Element tns:TX_EFSLOG_Type / tns:txberlog	22
Element tns:TX_EFSLOG_Type / tns:txlog	23
Element tns:TX_ABKEY_Type / tns:berAbleitungsdaten	23
Element tns:TXASBER_Type / tns:prodProdukt_ID	23
Element tns:TXASBER_Type / tns:berBerechtigung_ID	24
Element tns:TXASBER_Type / tns:transSelektionKriterien	24
Element tns:TXANLN_Type / tns:prodAbrechnungsverfahren	24
Element tns:TXANLN_Type / tns:berBezahlArt	25
Element tns:TXANLN_Type / tns:prodProdukt_ID	25
Element tns:TXANLN_Type / tns:berBerechtigung_ID	25
Element tns:TXANLN_Type / tns:transSelektionKriterien	26
Element tns:TXANLN_Type / tns:txpp	26
Element tns:TXANLN_Type / tns:txafblog	26
Element tns:TXAUSEFS_Type / tns:prodAbrechnungsverfahren	27
Element tns:TXAUSEFS_Type / tns:berBezahlMittel	27

Element tns:TXAUSEFS_Type / tns:berBezahlArt	27
Element tns:TXAUSEFS_Type / tns:prodProdukt_ID	28
Element tns:TXAUSEFS_Type / tns:berBerechtigung_ID	28
Element tns:TXAUSEFS_Type / tns:transSelektionKriterien	28
Element tns:TXAUSEFS_Type / tns:txpp	29
Element tns:TXAUSEFS_Type / tns:txefslog	29
Element tns:TXADM_Type / tns:transMediennummer	30
Element tns:TXADM_Type / tns:transappInstanz_ID	30
Element tns:TXABER_Type / tns:tx_ber	30
Element tns:TXABER_Type / tns:berechtigungTarifbereich	31
Element tns:TXABER_Type / tns:berechtigungTarifbereichZusatz	31
Element tns:TXABER_Type / tns:ausgabeTransaktionBerechtigung	31
Element tns:TXABER_Type / tns:berNmTransaktionMAC	31
Element tns:TXEBER_Type / tns:fahrttransaktion	32
Element tns:TXEBER_Type / tns:berNmTransaktionMAC	32
Element tns:TXAEBER_Type / tns:tx_ber	33
Element tns:TXAEBER_Type / tns:berechtigungTarifbereich	33
Element tns:TXAENBER_Type / tns:fahrttransaktion	33
Element tns:TXAENBER_Type / tns:berNmTransaktionMAC	34
Element tns:TXRBER_Type / tns:ruecknahmeTransaktionBerechtigung	34
Element tns:TXRBER_Type / tns:berNmTransaktionMAC	34
Element tns:TXAMBER_Type / tns:tx_abkey	35
Element tns:TXEMBER_Type / tns:tx_abkey	35
Element tns:TXRMBER_Type / tns:tx_abkey	35
Element tns:TXASKON_Type / tns:samSAM_ID	36
Element tns:TXASKON_Type / tns:samSchluessel_ID	36
Element tns:TXASKON_Type / tns:samLoadKeyZaehler	36
Element tns:TXASKON_Type / tns:samNutzungsLimitNeu	37
Element tns:TXUEBERKON_Type / tns:samSAM_ID	37
Element tns:TXUEBERKON_Type / tns:samSchluessel_ID	37
Element tns:TXUEBERKON_Type / tns:samLoadKeyZaehler	38
Element tns:TXUEBERKON_Type / tns:samNutzungsLimitGen	38
Element tns:TXBEKODL_Type / tns:berBerechtigung_ID	38
Element tns:TXBEKODL_Type / tns:txpp	38
Element tns:TXBEKODL_Type / tns:fahrttransaktion	39
Element tns:TXBEKODL_Type / tns:berNmTransaktionMAC	39
Element tns:TXBEWEBKOKVP_Type / tns:belastungstransaktionBerechtigung	39
Element tns:TXBEWEBKOKVP_Type / tns:berNmTransaktionMAC	40
Element tns:TXGKO_Type / tns:belastungstransaktionBerechtigung	40
Element tns:TXGKO_Type / tns:berNmTransaktionMAC	41
Element tns:TXGWEB_Type / tns:belastungstransaktionBerechtigung	41
Element tns:TXGWEB_Type / tns:berNmTransaktionMAC	41
Element tns:TXKNAWA_Type / tns:logTransaktionsOperator_ID	42
Element tns:TXKNAWA_Type / tns:logTerminal_ID	42
Element tns:TXKNAWA_Type / tns:logTransaktionsZeitpunkt	42
Element tns:TXKNAWA_Type / tns:logTransaktionsOrt_ID	43
Element tns:TXKNAWA_Type / tns:logValidationCode	43
Element tns:TXKNAWA_Type / tns:appInstanz_ID	44
Element tns:TXKNAWB_Type / tns:logTransaktionsOperator_ID	44
Element tns:TXKNAWB_Type / tns:logTerminal_ID	44
Element tns:TXKNAWB_Type / tns:logTransaktionsZeitpunkt	45
Element tns:TXKNAWB_Type / tns:logTransaktionsOrt_ID	45
Element tns:TXKNAWB_Type / tns:logValidationCode	45
Element tns:TXKNAWB_Type / tns:berBerechtigung_ID	46
Element tns:TXLPEB_Type / tns:ezahlungsbelegBerechtigung	46
Element tns:TXLPEB_Type / tns:berNmTransaktionMAC	47
Element tns:TXSANFB_Type / tns:berBerechtigung_ID	47
Element tns:TXSANFB_Type / tns:prodProdukt_ID	47
Element tns:TXSANFA_Type / tns:appInstanz_ID	48
Element tns:TXSMITB_Type / tns:berSperrkandidat	48
Element tns:TXSMITO_Type / tns:orgSperrkandidat	48
Element tns:TXSMITS_Type / tns:samSperrkandidat	49
Element tns:TXSFREIMITB_Type / tns:berSperrkandidat	49
Element tns:TXSFREIMITO_Type / tns:orgSperrkandidat	49
Element tns:TXSFREIMITS_Type / tns:samSperrkandidat	50
Element tns:AllgemeineTransaktionsdaten	50
Element tns:AllgemeineTransaktionsdaten / tns:logApplikationSeqNummer	51
Element tns:AllgemeineTransaktionsdaten / tns:logNmTransaktion_ID	51
Element tns:AllgemeineTransaktionsdaten / tns:logTransaktionsOperator_ID	51
Element tns:AllgemeineTransaktionsdaten / tns:logTerminal_ID	52
Element tns:AllgemeineTransaktionsdaten / tns:logTransaktionsZeitpunkt	52
Element tns:AllgemeineTransaktionsdaten / tns:logTransaktionsOrt_ID	52

Element tns:AllgemeineTransaktionsdaten / tns:logTransaktionsTyp.code	53
Element tns:TXTRANSABBRUCH_Type / tns:MKAH-PV-NM-MAC_ID	53
Element tns:TXTRANSABBRUCH_Type / tns:MKAH-PV-Nutzungszaehler	53
Element tns:TXTRANSABBRUCH_Type / tns:MKKVP--NM-MAC_ID	54
Element tns:TXTRANSABBRUCH_Type / tns:MKKVP-Nutzungszaehler	54
Element tns:TXADM	55
Element tns:TXAEBER	55
Element tns:TXAENBER	56
Element tns:TXAS	56
Element tns:TXASKON	57
Element tns:TXUEBERKON	58
Element tns:TXBEKODL	58
Element tns:TXBEKOKVP	59
Element tns:TXGKO	59
Element tns:TXBEWEBKVP	60
Element tns:TXGWEB	61
Element tns:TXABER	61
Element tns:TXEBER	62
Element tns:TXRBER	62
Element tns:TXLPEB	63
Element tns:TXSANFB	64
Element tns:TXSANFA	64
Element tns:TXSAANFB	65
Element tns:TXSAANFA	65
Element tns:TXSMITB	66
Element tns:TXSMITO	67
Element tns:TXSMITS	67
Element tns:TXSFREIMITB	68
Element tns:TXSFREIMITO	69
Element tns:TXSFREIMITS	69
Element tns:TXAUSEFS	70
Element tns:TXASBERAFB	71
Element tns:TXASBEREFS	72
Element tns:TXANLN	72
Element tns:TXTRANSABBRUCH	73
Element tns:TXKNAWA	74
Element tns:TXKNAWB	75
Element tns:TXAMBER	75
Element tns:TXEMBER	76
Element tns:TXRMBER	77
Complex Type(s)	78
Complex Type tns:TXAEBER_Type_1_3_0	78
Complex Type tns:NmTransaktion_ID_Type	78
Complex Type tns:Mitnahme_Type	79
Complex Type tns:Linie_ID_Type	79
Complex Type tns:LinieVariante_ID_Type	79
Complex Type tns:Fahrt_ID_Type	80
Complex Type tns:EFSViaOrtsListe_Type	80
Complex Type tns:TX_PP_Type	80
Complex Type tns:TX_BERLOG_Type	81
Complex Type tns:TX_LOG_Type	81
Complex Type tns:TX_AFBLOG_Type	82
Complex Type tns:TX_EFSLOG_Type	82
Complex Type tns:TX_ABKEY_Type	83
Complex Type tns:TXASBER_Type	83
Complex Type tns:TXANLN_Type	84
Complex Type tns:TXAUSEFS_Type	85
Complex Type tns:TXADM_Type	85
Complex Type tns:TXABER_Type	86
Complex Type tns:TXEBER_Type	87
Complex Type tns:TXAEBER_Type	87
Complex Type tns:TXAENBER_Type	88
Complex Type tns:TXRBER_Type	88
Complex Type tns:TXAMBER_Type	89
Complex Type tns:TXEMBER_Type	90
Complex Type tns:TXRMBER_Type	90
Complex Type tns:TXASKON_Type	91
Complex Type tns:TXUEBERKON_Type	92
Complex Type tns:TXBEKODL_Type	92
Complex Type tns:TXBEWEBKOKVP_Type	93
Complex Type tns:TXGKO_Type	93
Complex Type tns:TXGWEB_Type	94

Complex Type tns:TXKNAWA_Type	95
Complex Type tns:TXKNAWB_Type	95
Complex Type tns:TXLPEB_Type	96
Complex Type tns:TXSANFB_Type	97
Complex Type tns:TXSANFA_Type	97
Complex Type tns:TXSAANFA_Type	98
Complex Type tns:TXSAANFB_Type	99
Complex Type tns:TXSMITB_Type	99
Complex Type tns:TXSMITO_Type	100
Complex Type tns:TXSMITS_Type	100
Complex Type tns:TXSFREIMITB_Type	101
Complex Type tns:TXSFREIMITO_Type	102
Complex Type tns:TXSFREIMITS_Type	102
Complex Type tns:TXTRANSABBRUCH_Type	103
Simple Type(s)	104
Simple Type tns:Validation_CODE_Type	104
Simple Type tns:Amount65535	105
Simple Type tns:Profil_CODE_Type	106
Simple Type tns:SelektionKriterien_Type	107
Simple Type tns:Kudentyp_CODE_Type	108
Simple Type tns:ServiceKlasse_CODE_Type	109
Simple Type tns:ServiceKlasseExtra_CODE_Type	110
Simple Type tns:TransportTypeCode_Type	111
Simple Type tns:TransportmittelKategorie_CODE_Type	111
Simple Type tns:Transportserviceart_CODE_Type	112
Namespace: "http://vdv/ka/ion/2"	112
Schema(s)	112
Imported schema XML-Schema_ION.xsd	112
Element(s)	113
Element tns:TXB	113
Element tns:TXA	113
Element tns:TXBRequest	114
Element tns:TXARequest	115
Element tns:TXDEABER	115
Element tns:TXSMITA	116
Element tns:TXSFREIMITA	116
Element tns:TXSANFSYMK	117
Element tns:TXSANFASYMK	118
Element tns:TXSAANFSYMK	118
Element tns:TXSAANFASYMK	119
Element tns:TXSFREIMITSYMK	120
Element tns:TXSFREIMITASYMK	120
Element tns:TXSMITSYMK	121
Element tns:TXSMITASYMK	122
Element tns:TXSNAWA	122
Element tns:TXSNAWB	123
Complex Type(s)	124
Complex Type tns:TX_BASE_Type	124
Complex Type tns:ION_TX_HEADER_Type	124
Complex Type tns:IONTransaktion_ID_Type	125
Complex Type tns:TX_BER_Type	126
Complex Type tns:Berechtigung_ID_Type	127
Complex Type tns:EFMProdukt_ID_Type	127
Complex Type tns:Ort_ID_Type	127
Complex Type tns:Terminal_ID_Type	128
Complex Type tns:NmApplikationInstanz_ID_Type	128
Complex Type tns:Transaktionsdatensatz_Type	129
Complex Type tns:SymSchluessel_ID_Type	129
Complex Type tns:ASymSchluessel_ID_Type	129
Complex Type tns:appNmTransaktionMAC_Type	130
Complex Type tns:berNmTransaktionMAC_Type	130
Complex Type tns:TX_RET_Type	131
Complex Type tns:TX_SMIT_Type	131
Complex Type tns:TX_SANF_Type	132
Complex Type tns:TXA_Type	132
Complex Type tns:TXB_Type	133
Complex Type tns:TXAS_Type	134
Complex Type tns:TXDEABER_Req_Type	134
Complex Type tns:TXSMITA_Type	135
Complex Type tns:TXSFREIMITA_Type	136
Complex Type tns:TXSANFSYMK_Type	136
Complex Type tns:TXSANFASYMK_Type	137

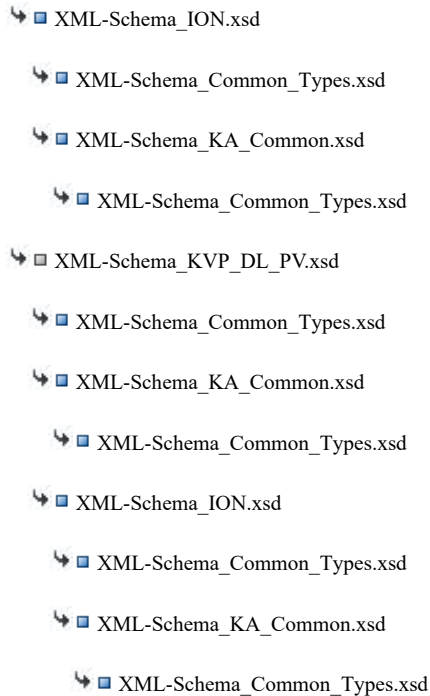
Complex Type tns:TXSAANFSYMK_Type	138
Complex Type tns:TXSAANFASYMK_Type	138
Complex Type tns:TXSFREIMITSYMK_Type	139
Complex Type tns:TXSFREIMITASYMK_Type	139
Complex Type tns:TXSMITSYMK_Type	140
Complex Type tns:TXSMITASYMK_Type	141
Complex Type tns:TXSNAWA_Req_Type	141
Complex Type tns:TXSNAWB_Req_Type	142
Simple Type(s)	143
Simple Type tns:TransSignatur_Type	143
Simple Type tns:Abrechnungsverfahren_CODE_Type	144
Simple Type tns:Bezahlart_CODE_Type	144
Simple Type tns:PrintableString	145
Simple Type tns:CommonServiceResultCode	145
Simple Type tns:NmTransaktionsTyp_CODE	146
Simple Type tns:OrtsTyp_CODE_Type	149
Simple Type tns:AuftragsTyp_CODE	149
Simple Type tns:TerminalTyp_CODE_Type	150
Simple Type tns:SAM_ID_Type	150
Simple Type tns:Mitteilung_CODE_Type	151
Simple Type tns:SperrlistenZyklusNummer_Type	151
Namespace: "http://vdv/ka/common/types/2"	152
Schema(s)	152
Imported schema XML-Schema_Common_Types.xsd	152
Simple Type(s)	152
Simple Type tns:ReferenceNumberTwo	152
Simple Type tns:INT2	153
Simple Type tns:INT1	153
Simple Type tns:SequenceNumberFour	153
Simple Type tns:INT4	154
Simple Type tns:DateTime	154
Simple Type tns:BitString16	155
Simple Type tns:DateTimeCompact	155
Simple Type tns:OctetString10	156
Simple Type tns:ReferenceNumberFour	156
Simple Type tns:ReferenceNumberThree	156
Simple Type tns:INT3	157
Simple Type tns:OctetString12	157
Simple Type tns:OctetString8	157
Simple Type tns:Date	158
Simple Type tns:BitString1	158
Simple Type tns:BitString8	158
Simple Type tns:DateCompact	159
Simple Type tns:Datef	159
Simple Type tns:OctetString1	160
Simple Type tns:OctetString4	160
Simple Type tns:OctetString128	160
Simple Type tns:OctetString200	161
Simple Type tns:ReferenceNumberOne	161
Simple Type tns:SequenceNumberOne	161
Simple Type tns:SequenceNumberTwo	162
Simple Type tns:SequenceNumberThree	162
Namespace: "http://vdv/ka/common/2"	162
Schema(s)	162
Imported schema XML-Schema_KA_Common.xsd	162
Element(s)	163
Element tns:VX	163
Simple Type(s)	163
Simple Type tns:Organisation_ID	163
Simple Type tns:KommunikationsPartnerRolle	164
Simple Type tns:StatusCode	165
Simple Type tns:StatusText	166
Complex Type(s)	166
Complex Type tns:VX_Message_Type	166
Namespace: ""	167
Element(s)	167
Element tns:TX_BASE_Type / txbase	167
Element tns:ION_TX_HEADER_Type / transAuftrag	168
Element tns:ION_TX_HEADER_Type / transEmpfaenger_ID	168
Element tns:ION_TX_HEADER_Type / transEmpfaengerRolle	168
Element tns:ION_TX_HEADER_Type / transStatus	169
Element tns:ION_TX_HEADER_Type / transTransaktion_ID	169

Element tns:IONTransaktion_ID_Type / transSequenznummer	170
Element tns:IONTransaktion_ID_Type / transSenderRolle	170
Element tns:IONTransaktion_ID_Type / transSender_ID	170
Element tns:ION_TX_HEADER_Type / transTransaktionsTyp	171
Element tns:ION_TX_HEADER_Type / transTransaktionsZeitpunkt	171
Element tns:ION_TX_HEADER_Type / transVersion	171
Element tns:ION_TX_HEADER_Type / transWiederholungsZaehler	172
Element tns:ION_TX_HEADER_Type / transSignaturTyp	172
Element tns:ION_TX_HEADER_Type / transSignaturZertifikat	172
Element tns:ION_TX_HEADER_Type / transSignatur	172
Element tns:TX_BER_Type / berGueltigkeitsbeginn	173
Element tns:TX_BER_Type / berGueltigkeitsende	173
Element tns:TX_BER_Type / prodAbrechnungsverfahren	173
Element tns:TX_BER_Type / berBezahlArt	174
Element tns:TX_BER_Type / berBezahlMittel	174
Element tns:Berechtigung_ID_Type / berechtigungNummer	174
Element tns:Berechtigung_ID_Type / kvp_ID	174
Element tns:EFMPProdukt_ID_Type / produktNummer	175
Element tns:EFMPProdukt_ID_Type / organisationID	175
Element tns:Ort_ID_Type / ortTyp	175
Element tns:Ort_ID_Type / ortNummer	176
Element tns:Ort_ID_Type / ortDomaene_ID	176
Element tns:Terminal_ID_Type / terminalTyp	176
Element tns:Terminal_ID_Type / terminalNummer	177
Element tns:Terminal_ID_Type / terminalOwner_ID	177
Element tns:NmApplikationInstanz_ID_Type / NmAppInstanznummer	177
Element tns:NmApplikationInstanz_ID_Type / kvp_ID	178
Element tns:Transaktionsdatensatz_Type / Transaktionsdaten	178
Element tns:SymSchluessel_ID_Type / schluesselNummer	178
Element tns:SymSchluessel_ID_Type / schluesselVersion	178
Element tns:SymSchluessel_ID_Type / schluesselInhaber_ID	179
Element tns:ASymSchluessel_ID_Type / signaturSchluessel	179
Element tns:appNmTransaktionMAC_Type / appMAC_AH	179
Element tns:appNmTransaktionMAC_Type / appMAC_KVP	179
Element tns:appNmTransaktionMAC_Type / appMAC_AH_Schluessel_ID	180
Element tns:appNmTransaktionMAC_Type / appMAC_KVP_Schluessel_ID	180
Element tns:berNmTransaktionMAC_Type / berMAC_PV	180
Element tns:berNmTransaktionMAC_Type / berMAC_KVP	181
Element tns:berNmTransaktionMAC_Type / berMAC_PV_Schluessel_ID	181
Element tns:berNmTransaktionMAC_Type / berMAC_KVP_Schluessel_ID	181
Element tns:TX_RET_Type / transOrigID	182
Element tns:TX_RET_Type / transOrigSignatur	182
Element tns:TX_RET_Type / transOriginalZeit	182
Element tns:TX_SMIT_Type / sperrAnforderungBezug	182
Element tns:TX_SMIT_Type / sperrEntscheidung	183
Element tns:TX_SANF_Type / sperrSperrgrund	183
Element tns:TXA_Type / transAblehnungGrund	183
Element tns:TXAS_Type / transSendeAuftrag	184
Element tns:TXAS_Type / transSendeAuftragstyp	184
Element tns:TXDEABER_Req_Type / prodAkzeptanzEnde	185
Element tns:TXDEABER_Req_Type / prodProdukt_ID	185
Element tns:TXSMITA_Type / appSperrkandidat	185
Element tns:TXSANFSYMK_Type / keySperrkandidatsym	186
Element tns:TXSANFASYMK_Type / keySperrkandidatasym	186
Element tns:TXSFREIMITSYMK_Type / keySperrkandidatsym	186
Element tns:TXSFREIMITASYMK_Type / keySperrkandidatasym	187
Element tns:TXSMITSYMK_Type / keySperrkandidatsym	187
Element tns:TXSMITASYMK_Type / keySperrkandidatasym	187
Element tns:TXSNAWA_Req_Type / samSperrkandidat	188
Element tns:TXSNAWA_Req_Type / orgSperrkandidat	188
Element tns:TXSNAWA_Req_Type / zyklusNummer	188
Element tns:TXSNAWA_Req_Type / sperrtransaktionApplikation	189
Element tns:TXSNAWA_Req_Type / appNmTransaktionMAC	189
Element tns:TXSNAWB_Req_Type / samSperrkandidat	190
Element tns:TXSNAWB_Req_Type / orgSperrkandidat	190
Element tns:TXSNAWB_Req_Type / zyklusNummer	190
Element tns:TXSNAWB_Req_Type / sperrtransaktionBerechtigung	191
Element tns:TXSNAWB_Req_Type / berNmTransaktionMAC	191
Element tns:VX_Message_Type / StatusCode	192
Element tns:VX_Message_Type / StatusText	192

Resource hierarchy:

Legend:  Import,  Include,  Redefine,  Override,  Cycle detected

XML-Schema_KVP_DL_PV_ext-1.3.0.xsd



Namespace: "http://vdv/ka/kvp-dl-pv/2"

Schema(s)

Main schema XML-Schema_KVP_DL_PV_ext-1.3.0.xsd

Namespace	http://vdv/ka/kvp-dl-pv/2	
Properties	attribute form default:	unqualified
	element form default:	qualified
	version:	1.3.0
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/ext/1.3.0/XML-Schema_KVP_DL_PV_ext-1.3.0.xsd	

Included schema XML-Schema_KVP_DL_PV.xsd

Namespace	http://vdv/ka/kvp-dl-pv/2	
Properties	attribute form default:	unqualified
	element form default:	qualified
	version:	1.11.1
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd	

Element(s)

Element **tns:TXAEBER_Type_1_3_0** / **tns:tx_ber**

Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Diagram	
Type	tns:TX_BER_Type
Properties	content: complex
Model	berGueltigkeitsbeginn , berGueltigkeitsende , prodAbrechnungsVerfahren , berBezahlArt , berBezahlMittel
Children	berBezahlArt, berBezahlMittel, berGueltigkeitsbeginn, berGueltigkeitsende, prodAbrechnungsVerfahren
Instance	<pre><tns:tx_ber xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berGueltigkeitsbeginn>{1,1}</berGueltigkeitsbeginn> <berGueltigkeitsende>{1,1}</berGueltigkeitsende> <prodAbrechnungsVerfahren>{1,1}</prodAbrechnungsVerfahren> <berBezahlArt>{1,1}</berBezahlArt> <berBezahlMittel>{1,1}</berBezahlMittel> </tns:tx_ber></pre>
Source	<code><xs:element name="tx_ber" type="ion:TX_BER_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/ext/1.3.0/XML-Schema_KVP_DL_PV_ext-1.3.0.xsd

Element tns:TXAEBER_Type_1_3_0 / tns:berechtigungTarifbereichDaten

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	xs:hexBinary
Properties	content: simple
Source	<code><xs:element name="berechtigungTarifbereichDaten" type="xs:hexBinary" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/ext/1.3.0/XML-Schema_KVP_DL_PV_ext-1.3.0.xsd

Element tns:TXAEBER_Type_1_3_0 / tns:berBerechtigung_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></pre>
Source	<code><xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/ext/1.3.0/XML-Schema_KVP_DL_PV_ext-1.3.0.xsd

Element tns:TXAEBER_Type_1_3_0 / tns:prodProdukt_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Diagram	
Type	tns:EFMProdukt_ID_Type
Properties	content: complex
Model	produktNummer{0,1} , organisationID
Children	organisationID, produktNummer
Instance	<pre><tns:prodProdukt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <produktNummer>{0,1}</produktNummer> <organisationID>{1,1}</organisationID> </tns:prodProdukt_ID></pre>
Source	<pre><xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/ext/1.3.0/XML-Schema_KVP_DL_PV_ext-1.3.0.xsd


Element tns:TXAEBER_1_3_0

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Aenderung einer Berechtigung (nicht moeglich bei EFS). Release 1.3.0. Korrektur: fehlende Berechtigungs-ID und Produkt-ID.
Diagram	
Type	tns:TXAEBER_Type_1_3_0
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAEBER_Type_1_3_0
Properties	content: complex
Model	txbase , tns:tx_ber , tns:berechtigungTarifbereichDaten , tns:berBerechtigung_ID , tns:prodProdukt_ID
Children	tns:berBerechtigung_ID, tns:berechtigungTarifbereichDaten, tns:prodProdukt_ID, tns:tx_ber, txbase
Instance	<pre><tns:TXAEBER_1_3_0 xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:tx_ber>{1,1}</tns:tx_ber> <tns:berechtigungTarifbereichDaten>{1,1}</tns:berechtigungTarifbereichDaten> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> </tns:TXAEBER_1_3_0></pre>
Source	<pre><xs:element name="TXAEBER_1_3_0" type="tns:TXAEBER_Type_1_3_0"> <xs:annotation> <xs:documentation>Element: Aenderung einer Berechtigung (nicht moeglich bei EFS). Release 1.3.0. Korrektur: fehlende Berechtigungs-ID und Produkt-ID.</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/ext/1.3.0/XML-Schema_KVP_DL_PV_ext-1.3.0.xsd


Element `tns:NmTransaktion_ID_Type` / `tns:samSequenznummer`

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:SequenceNumberFour				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SequenceNumberFour 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Source	<code><xs:element name="samSequenznummer" type="ct:SequenceNumberFour" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element `tns:NmTransaktion_ID_Type` / `tns:SAM_ID.samNummer`


Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:SAM_ID_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree tns:SAM_ID_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Source	<code><xs:element name="SAM_ID.samNummer" type="ion:SAM_ID_Type" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element `tns:Mitnahme_Type` / `tns:mitnahmeTyp`


Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:Profil_CODE_Type		
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:Profil_CODE_Type		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	nicht spezifiziert/unbestimmt
	enumeration	1	Erwachsener
	enumeration	2	Kind
	enumeration	3	Student
	enumeration	5	Behinderter
	enumeration	6	Sehbehinderter

	enumeration	7	Hoergeschaedigter
	enumeration	8	Arbeitsloser/Sozialhilfeempfaenger
	enumeration	9	Personal
	enumeration	10	Militaeranhehoeriger
	enumeration	19	Schueler
	enumeration	20	Azubi
	enumeration	25	Senior
Source	<xs:element name="mitnahmeTyp" type="tns:Profil_CODE_Type"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		


Element tns:Mitnahme_Type / tns:mitnahmeAnzahl

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:INT1		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
Source	<xs:element name="mitnahmeAnzahl" type="ct:INT1"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:Linie_ID_Type / tns:linienNummer


Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:ReferenceNumberTwo		
Type hierarchy	<ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT2<ul style="list-style-type: none">• tns:ReferenceNumberTwo		
Properties	content:	simple	
Facets	maxInclusive	65535	
	minInclusive	0	
Source	<xs:element name="linienNummer" type="ct:ReferenceNumberTwo" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:Linie_ID_Type / tns:linieDomaene_ID

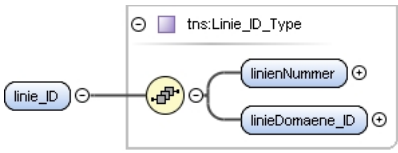
Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:Organisation_ID		
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT2 • tns:ReferenceNumberTwo • tns:Organisation_ID 		
Properties	content:	simple	
Facets	maxInclusive	65535	

	minInclusive 0
Source	<code><xs:element name="linieDomaene_ID" type="ka:Organisation_ID" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd


Element **tns:LinieVariante_ID_Type** / **tns:variantenNummer**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:ReferenceNumberOne
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:ReferenceNumberOne
Properties	content: simple
Facets	maxInclusive 255 minInclusive 0
Source	<code><xs:element name="variantenNummer" type="ct:ReferenceNumberOne" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:LinieVariante_ID_Type** / **tns:linie_ID**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Linie_ID_Type
Properties	content: complex
Model	tns:linienNummer, tns:linieDomaene_ID
Children	tns:linieDomaene_ID, tns:linienNummer
Instance	<pre><tns:linie_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:linienNummer>{1,1}</tns:linienNummer> <tns:linieDomaene_ID>{1,1}</tns:linieDomaene_ID> </tns:linie_ID></pre>
Source	<code><xs:element name="linie_ID" type="tns:Linie_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:Fahrt_ID_Type** / **tns:fahrtNummer**

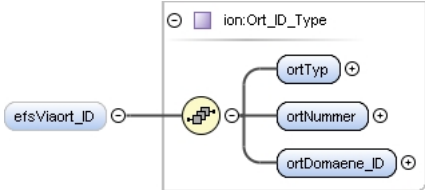
Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:ReferenceNumberThree
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree
Properties	content: simple
Facets	maxInclusive 16777215 minInclusive 0
Source	<code><xs:element name="fahrtNummer" type="ct:ReferenceNumberThree" /></code>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---


Element **tns:Fahrt_ID_Type** / **tns:fahrtBetreiber_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="fahrtBetreiber_ID" type="ka:Organisation_ID"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element **tns:EFsViaOrtsListe_Type** / **tns:efsViaort_ID**


Namespace	http://vdv/ka/kvp-dl-pv/2						
Diagram							
Type	tns:Ort_ID_Type						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>3</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	3
content:	complex						
minOccurs:	0						
maxOccurs:	3						
Model	ortTyp , ortNummer , ortDomaene_ID						
Children	ortDomaene_ID, ortNummer, ortTyp						
Instance	<pre><tns:efsViaort_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:efsViaort_ID></pre>						
Source	<code><xs:element name="efsViaort_ID" type="ion:Ort_ID_Type" minOccurs="0" maxOccurs="3"/></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd						

Element **tns:TX_PP_Type** / **tns:ppLeistungsPreis**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Amount65535
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:Amount65535
Properties	content: simple

Facets	maxInclusive	65535
	minInclusive	0
Source	<xs:element name="ppLeistungsPreis" type="tns:Amount65535" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd	


Element tns:TX_PP_Type / tns:ppMehrwertsteuer

Namespace	http://vdv/ka/kvp-dl-pv/2	
Diagram		
Type	tns:INT2	
Properties	content:	simple
Facets	maxInclusive	65535
	minInclusive	0
Source	<xs:element name="ppMehrwertsteuer" type="ct:INT2" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd	

Element tns:TX_BERLOG_Type / tns:berLogLinieVariante_ID

Namespace	http://vdv/ka/kvp-dl-pv/2	
Diagram		
Type	tns:LinieVariante_ID_Type	
Properties	content:	complex
Model	tns:variantenNummer , tns:linie_ID	
Children	tns:linie_ID, tns:variantenNummer	
Instance	<tns:berLogLinieVariante_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:variantenNummer>{1,1}</tns:variantenNummer> <tns:linie_ID>{1,1}</tns:linie_ID> </tns:berLogLinieVariante_ID>	
Source	<xs:element name="berLogLinieVariante_ID" type="tns:LinieVariante_ID_Type" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd	

Element tns:TX_BERLOG_Type / tns:berLogFahrt_ID

Namespace	http://vdv/ka/kvp-dl-pv/2	
Diagram		
Type	tns:Fahrt_ID_Type	
Properties	content:	complex
Model	tns:fahrtNummer , tns:fahrtBetreiber_ID	
Children	tns:fahrtBetreiber_ID, tns:fahrtNummer	
Instance	<tns:berLogFahrt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:fahrtNummer>{1,1}</tns:fahrtNummer> <tns:fahrtBetreiber_ID>{1,1}</tns:fahrtBetreiber_ID> </tns:berLogFahrt_ID>	
Source	<xs:element name="berLogFahrt_ID" type="tns:Fahrt_ID_Type" />	

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---

Element tns:TX_LOG_Type / tns:logTransaktionsoperator_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Organisation_ID
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID
Properties	content: simple
Facets	maxInclusive 65535 minInclusive 0
Source	<code><xs:element name="logTransaktionsoperator_ID" type="ka:Organisation_ID" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TX_LOG_Type / tns:logTransaktionsZeitpunkt_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:DateTimeCompact
Properties	content: simple
Facets	maxInclusive 2117-12-31T23:59:58 minInclusive 1990-01-01T00:00:00
Source	<code><xs:element name="logTransaktionsZeitpunkt_ID" type="ct:DateTimeCompact" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TX_LOG_Type / tns:logTransaktionsort_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:logTransaktionsort_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:logTransaktionsort_ID></pre>
Source	<code><xs:element name="logTransaktionsort_ID" type="ion:Ort_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TX_LOG_Type** / **tns:logTransaktionsTyp_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:NmTransaktionsTyp_CODE		
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:NmTransaktionsTyp_CODE 		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Keine Angabe
	enumeration	1	Ausgabetransaktion - Applikation oder Berechtigung
	enumeration	2	Entwertung
	enumeration	11	CI
	enumeration	12	CO
	enumeration	15	Einzahlung - Berechtigung
	enumeration	16	CI nach Fahrtfortsetzung
	enumeration	18	NTP Aendern
	enumeration	20	Sperrrtransaktion Applikation oder Berechtigung
	enumeration	21	Entsperrrtransaktion Applikation oder Berechtigung
	enumeration	22	BI
	enumeration	23	BO
	enumeration	24	INOUT
	enumeration	25	Rueckgabetransaktion - Applikation oder Berechtigung
	enumeration	27	Kontrolle
	enumeration	28	Belastungstransaktion - Berechtigung und Gutschriften bei Rueckzahlung (POB/PEB/WEB)
	enumeration	29	Belastungstransaktion WEB mit Autoload
	enumeration	30	WEB Buchung(Laden/Entladen)
	enumeration	31	WEB-CI mit Autoload
	enumeration	32	WEB-CO mit Autoload
	enumeration	33	Kontrolle nach CI; BIBO oder Entwertung
	enumeration	34	Check personal (CPKontrolldatensatz fuer Kontrollterminal)
	enumeration	35	Auto CO
	enumeration	36	manuelles CO (nachtraeglich durch den Nutzer)
	enumeration	37	Ausgabe EFS ueber Aktionsliste
	enumeration	38	Entsperrrtransaktion EFS ueber Aktionsliste
	enumeration	39	Rueckgabetransaktion EFS ueber Aktionsliste
Source	<xs:element name="logTransaktionsTyp_ID" type="ion:NmTransaktionsTyp_CODE"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element **tns:TX_AFBLOG_Type** / **tns:afbLogFahrgastTyp**

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:Kundentyp_CODE_Type		

Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:Kundentyp_CODE_Type		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	nicht spezifiziert/unbestimmt
	enumeration	1	Erwachsener
	enumeration	2	Kind
	enumeration	3	Student
	enumeration	5	Behinderter
	enumeration	6	Sehbehinderter
	enumeration	7	Hoergeschaedigter
	enumeration	8	Arbeitsloser/Sozialhilfeempfaenger
	enumeration	9	Personal
	enumeration	10	Militaeranhehoeriger
	enumeration	19	Schueler
	enumeration	20	Azubi
	enumeration	25	Senior
Source	<xs:element name="afbLogFahrgastTyp" type="tns:Kundentyp_CODE_Type" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TX_AFBLOG_Type / tns:afbLogVerkehrsmittelart


Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:Transportserviceart_CODE_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 <ul style="list-style-type: none"> tns:TransportTypeCode_Type tns:Transportserviceart_CODE_Type 				
Properties	content: simple				
Facets	<table> <tr><td>maxInclusive</td><td>255</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<code><xs:element name="afbLogVerkehrsmittelart" type="tns:Transportserviceart_CODE_Type" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element tns:TX_AFBLOG_Type / tns:afbLogServiceKlasse

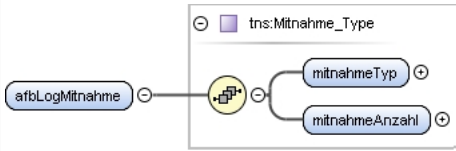
Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:ServiceKlasse_CODE_Type
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 <ul style="list-style-type: none"> tns:ServiceKlasse_CODE_Type
Properties	content: simple

Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	nicht spezifiziert/unbestimmt
	enumeration	1	1. Klasse
	enumeration	2	2. Klasse
Source	<xs:element name="afbLogServiceKlasse" type="tns:ServiceKlasse_CODE_Type"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TX_AFBLOG_Type / tns:afbLogDynamischerRabattParameter

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:OctetString4		
Properties	content:	simple	
Facets	length	4	
Source	<code><xs:element name="afbLogDynamischerRabattParameter" type="ct:OctetString4"/></code>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TX_AFBLOG_Type / tns:afbLogMitnahme

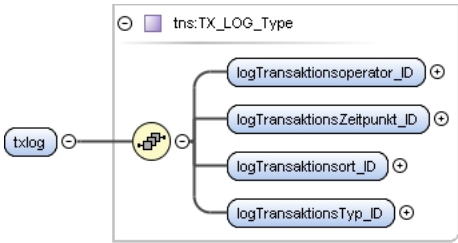
Namespace	http://vdv/ka/kvp-dl-pv/2						
Diagram							
Type	tns:Mitnahme_Type						
Properties	<table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>1</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table>	content:	complex	minOccurs:	1	maxOccurs:	unbounded
content:	complex						
minOccurs:	1						
maxOccurs:	unbounded						
Model	tns:mitnahmeTyp , tns:mitnahmeAnzahl						
Children	tns:mitnahmeAnzahl, tns:mitnahmeTyp						
Instance	<pre><tns:afbLogMitnahme xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:mitnahmeTyp>{1,1}</tns:mitnahmeTyp> <tns:mitnahmeAnzahl>{1,1}</tns:mitnahmeAnzahl> </tns:afbLogMitnahme></pre>						
Source	<pre><xs:element name="afbLogMitnahme" type="tns:Mitnahme_Type" minOccurs="1" maxOccurs="unbounded"/></pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd						

Element tns:TX_AFBLOG_Type / tns:txberlog


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_BERLOG_Type
Properties	content: complex
Model	tns:berLogLinieVariante_ID , tns:berLogFahrt_ID
Children	tns:berLogFahrt_ID, tns:berLogLinieVariante_ID

Instance	<pre><tns:txberlog xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:berLogLinieVariante_ID>{1,1}</tns:berLogLinieVariante_ID> <tns:berLogFahrt_ID>{1,1}</tns:berLogFahrt_ID> </tns:txberlog></pre>
Source	<pre><xs:element name="txberlog" type="tns:TX_BERLOG_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TX_AFBLOG_Type / tns:txlog


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	 The diagram shows the structure of the tns:TX_LOG_Type element. It is a complex type containing four child elements: logTransaktionsoperator_ID, logTransaktionsZeitpunkt_ID, logTransaktionsort_ID, and logTransaktionsTyp_ID. Each child element is represented by a rounded rectangle with a plus sign in a circle, indicating it is optional. The parent element is represented by a rounded rectangle with a plus sign in a circle and a yellow background.
Type	tns:TX_LOG_Type
Properties	content: complex
Model	tns:logTransaktionsoperator_ID , tns:logTransaktionsZeitpunkt_ID , tns:logTransaktionsort_ID , tns:logTransaktionsTyp_ID
Children	tns:logTransaktionsTyp_ID , tns:logTransaktionsZeitpunkt_ID , tns:logTransaktionsoperator_ID , tns:logTransaktionsort_ID
Instance	<pre><tns:txlog xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:logTransaktionsoperator_ID>{1,1}</tns:logTransaktionsoperator_ID> <tns:logTransaktionsZeitpunkt_ID>{1,1}</tns:logTransaktionsZeitpunkt_ID> <tns:logTransaktionsort_ID>{1,1}</tns:logTransaktionsort_ID> <tns:logTransaktionsTyp_ID>{1,1}</tns:logTransaktionsTyp_ID> </tns:txlog></pre>
Source	<pre><xs:element name="txlog" type="tns:TX_LOG_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TX_EFSLOG_Type / tns:efsFahrgastTyp

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:Kundentyp_CODE_Type		
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:Kundentyp_CODE_Type		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	nicht spezifiziert/unbestimmt
	enumeration	1	Erwachsener
	enumeration	2	Kind
	enumeration	3	Student
	enumeration	5	Behinderter
	enumeration	6	Sehbehinderter
	enumeration	7	Hoergeschaeedigter
	enumeration	8	Arbeitsloser/Sozialhilfeempfaenger
	enumeration	9	Personal
	enumeration	10	Militaeranhehoeriger
	enumeration	19	Schueler

	enumeration	20	Azubi
	enumeration	25	Senior
Source	<xs:element name="efsFahrgastTyp" type="tns:Kudentyp_CODE_Type" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TX_EFSLOG_Type / tns:efsVerkehrsmittelKategorie

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:TransportmittelKategorie_CODE_Type		
Type hierarchy	<ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:TransportTypeCode_Type<ul style="list-style-type: none">• tns:TransportmittelKategorie_CODE_Type		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
Source	<xs:element name="efsVerkehrsmittelKategorie" type="tns:TransportmittelKategorie_CODE_Type" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TX_EFSLOG_Type / tns:efsLogServiceKlasse

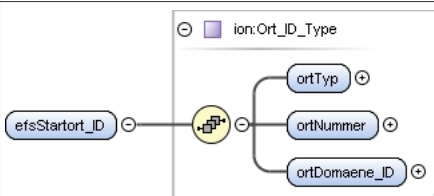
Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:ServiceKlasse_CODE_Type		
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:ServiceKlasse_CODE_Type 		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	nicht spezifiziert/unbestimmt
	enumeration	1	1. Klasse
	enumeration	2	2. Klasse
Source	<xs:element name="efsLogServiceKlasse" type="tns:ServiceKlasse_CODE_Type" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TX_EFSLOG_Type / tns:efsServiceKlasseExtra

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:ServiceKlasseExtra_CODE_Type		
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:ServiceKlasseExtra_CODE_Type 		
Properties	content:	simple	

Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	nicht spezifiziert/unbestimmt
	enumeration	1	Fruehstueck
	enumeration	2	Mittagessen
	enumeration	3	Abendessen
	enumeration	4	Buffet
	enumeration	5	Imbiss
Source	<xs:element name="efsServiceKlasseExtra" type="tns:ServiceKlasseExtra_CODE_Type" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		


Element tns:TX_EFSLOG_Type / tns:efsStartort_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:efsStartort_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:efsStartort_ID></pre>
Source	<pre><xs:element name="efsStartort_ID" type="ion:Ort_ID_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

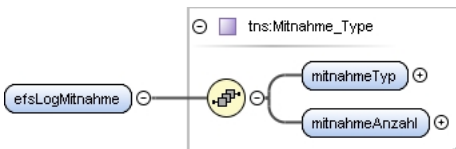
Element tns:TX_EFSLOG_Type / tns:efsZielort_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:efsZielort_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:efsZielort_ID></pre>
Source	<pre><xs:element name="efsZielort_ID" type="ion:Ort_ID_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TX_EFSLOG_Type** / **tns:efsViaOrte_IDs**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:EFSViaOrtsListe_Type
Properties	content: complex
Model	tns:efsViaort_ID{0,3}
Children	tns:efsViaort_ID
Instance	<pre><tns:efsViaOrte_IDs xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:efsViaort_ID>{0,3}</tns:efsViaort_ID> </tns:efsViaOrte_IDs></pre>
Source	<pre><xs:element name="efsViaOrte_IDs" type="tns:EFSViaOrtsListe_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TX_EFSLOG_Type** / **tns:efsLogMitnahme**

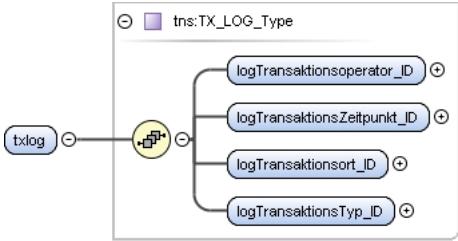
Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Mitnahme_Type
Properties	content: complex minOccurs: 1 maxOccurs: unbounded
Model	tns:mitnahmeTyp , tns:mitnahmeAnzahl
Children	tns:mitnahmeAnzahl, tns:mitnahmeTyp
Instance	<pre><tns:efsLogMitnahme xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:mitnahmeTyp>{1,1}</tns:mitnahmeTyp> <tns:mitnahmeAnzahl>{1,1}</tns:mitnahmeAnzahl> </tns:efsLogMitnahme></pre>
Source	<pre><xs:element name="efsLogMitnahme" type="tns:Mitnahme_Type" minOccurs="1" maxOccurs="unbounded" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TX_EFSLOG_Type** / **tns:txberlog**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_BERLOG_Type
Properties	content: complex
Model	tns:berLogLinieVariante_ID , tns:berLogFahrt_ID
Children	tns:berLogFahrt_ID, tns:berLogLinieVariante_ID
Instance	<pre><tns:txberlog xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:berLogLinieVariante_ID>{1,1}</tns:berLogLinieVariante_ID> <tns:berLogFahrt_ID>{1,1}</tns:berLogFahrt_ID> </tns:txberlog></pre>
Source	<pre><xs:element name="txberlog" type="tns:TX_BERLOG_Type" /></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---


Element **tns:TX_EFSLOG_Type** / **tns:txlog**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_LOG_Type
Properties	content: complex
Model	tns:logTransaktionsoperator_ID, tns:logTransaktionsZeitpunkt_ID, tns:logTransaktionsort_ID, tns:logTransaktionsTyp_ID
Children	tns:logTransaktionsTyp_ID, tns:logTransaktionsZeitpunkt_ID, tns:logTransaktionsoperator_ID, tns:logTransaktionsort_ID
Instance	<pre><tns:txlog xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:logTransaktionsoperator_ID>{1,1}</tns:logTransaktionsoperator_ID> <tns:logTransaktionsZeitpunkt_ID>{1,1}</tns:logTransaktionsZeitpunkt_ID> <tns:logTransaktionsort_ID>{1,1}</tns:logTransaktionsort_ID> <tns:logTransaktionsTyp_ID>{1,1}</tns:logTransaktionsTyp_ID> </tns:txlog></pre>
Source	<pre><xs:element name="txlog" type="tns:TX_LOG_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TX_ABKEY_Type** / **tns:berAbleitungsdaten**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:OctetString10
Properties	content: simple
Facets	length 10
Source	<pre><xs:element name="berAbleitungsdaten" type="ct:OctetString10" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXASBER_Type** / **tns:prodProdukt_ID**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:EFMProdukt_ID_Type
Properties	content: complex
Model	produktNummer{0,1}, organisationID
Children	organisationID, produktNummer
Instance	<pre><tns:prodProdukt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <produktNummer>{0,1}</produktNummer> <organisationID>{1,1}</organisationID> </tns:prodProdukt_ID></pre>
Source	<pre><xs:element name="prodProdukt_ID" type="tns:EFMProdukt_ID_Type" /></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---


Element **tns:TXASBER_Type** / **tns:berBerechtigung_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></pre>
Source	<pre><xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXASBER_Type** / **tns:transSelektionKriterien**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:SelektionKriterien_Type
Type hierarchy	<ul style="list-style-type: none"> xs:dateTime tns:DateTime tns:SelektionKriterien_Type
Properties	content: simple
Source	<pre><xs:element name="transSelektionKriterien" type="tns:SelektionKriterien_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXANLN_Type** / **tns:prodAbrechnungsverfahren**


Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:Abrechnungsverfahren_CODE_Type		
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:Abrechnungsverfahren_CODE_Type		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Keine Angabe
	enumeration	1	Pre-Paid
	enumeration	2	Post-Paid
	enumeration	3	Trip-Paid
Source	<xs:element name="prodAbrechnungsverfahren" type="ion:Abrechnungsverfahren_CODE_Type" />		

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---


Element **tns:TXANLN_Type** / **tns:berBezahlArt**

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:Bezahlart_CODE_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:Bezahlart_CODE_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<code><xs:element name="berBezahlArt" type="ion:Bezahlart_CODE_Type"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element **tns:TXANLN_Type** / **tns:prodProdukt_ID**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:EFMProdukt_ID_Type
Properties	content: complex
Model	produktNummer{0,1} , organisationID
Children	organisationID, produktNummer
Instance	<code><tns:prodProdukt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <produktNummer>{0,1}</produktNummer> <organisationID>{1,1}</organisationID> </tns:prodProdukt_ID></code>
Source	<code><xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXANLN_Type** / **tns:berBerechtigung_ID**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<code><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></code>
Source	<code><xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/></code>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---

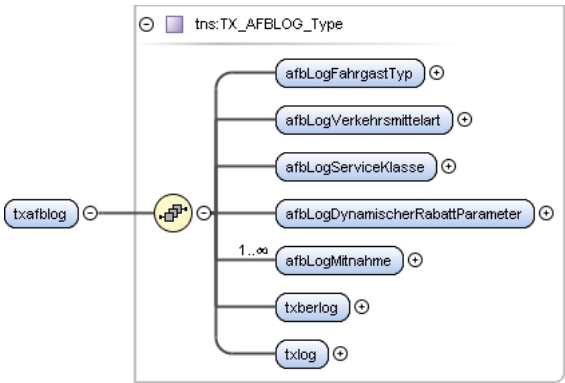
Element **tns:TXANLN_Type** / **tns:transSelektionKriterien**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:SelektionKriterien_Type
Type hierarchy	<ul style="list-style-type: none"> xs:dateTime tns:DateTime tns:SelektionKriterien_Type
Properties	content: simple
Source	<code><xs:element name="transSelektionKriterien" type="tns:SelektionKriterien_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXANLN_Type** / **tns:txpp**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_PP_Type
Properties	content: complex
Model	tns:ppLeistungsPreis, tns:ppMehrwertsteuer
Children	tns:ppLeistungsPreis, tns:ppMehrwertsteuer
Instance	<pre><tns:txpp xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:ppLeistungsPreis>{1,1}</tns:ppLeistungsPreis> <tns:ppMehrwertsteuer>{1,1}</tns:ppMehrwertsteuer> </tns:txpp></pre>
Source	<code><xs:element name="txpp" type="tns:TX_PP_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXANLN_Type** / **tns:txafblog**

Namespace	http://vdv/ka/kvp-dl-pv/2						
Diagram							
Type	tns:TX_AFBLOG_Type						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>1</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table>	content:	complex	minOccurs:	1	maxOccurs:	unbounded
content:	complex						
minOccurs:	1						
maxOccurs:	unbounded						

Model	tns:afbLogFahrgastTyp, tns:afbLogVerkehrsmittelart, tns:afbLogServiceKlasse, tns:afbLogDynamischerRabattParameter, tns:afbLogMitnahme+, tns:txberlog, tns:txlog
Children	tns:afbLogDynamischerRabattParameter, tns:afbLogFahrgastTyp, tns:afbLogMitnahme, tns:afbLogServiceKlasse, tns:afbLogVerkehrsmittelart, tns:txberlog, tns:txlog
Instance	<pre><tns:txafblog xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:afbLogFahrgastTyp>{1,1}</tns:afbLogFahrgastTyp> <tns:afbLogVerkehrsmittelart>{1,1}</tns:afbLogVerkehrsmittelart> <tns:afbLogServiceKlasse>{1,1}</tns:afbLogServiceKlasse> <tns:afbLogDynamischerRabattParameter>{1,1}</tns:afbLogDynamischerRabattParameter> <tns:afbLogMitnahme>{1,unbounded}</tns:afbLogMitnahme> <tns:txberlog>{1,1}</tns:txberlog> <tns:txlog>{1,1}</tns:txlog> </tns:txafblog></pre>
Source	<code><xs:element name="txafblog" type="tns:TX_AFBLOG_Type" minOccurs="1" maxOccurs="unbounded"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAUSEFS_Type / tns:prodAbrechnungsverfahren

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:Abrechnungsverfahren_CODE_Type		
Type hierarchy	<ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:Abrechnungsverfahren_CODE_Type		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Keine Angabe
	enumeration	1	Pre-Paid
	enumeration	2	Post-Paid
	enumeration	3	Trip-Paid
Source	<xs:element name="prodAbrechnungsverfahren" type="ion:Abrechnungsverfahren_CODE_Type" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TXAUSEFS_Type / tns:berBezahlMittel

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:OctetString10
Properties	content: simple
Facets	length 10
Source	<code><xs:element name="berBezahlMittel" type="ct:OctetString10"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAUSEFS_Type / tns:berBezahlArt

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Bezahlart_CODE_Type
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1

	<ul style="list-style-type: none"> tns:Bezahlart_CODE_Type
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="berBezahlArt" type="ion:Bezahlart_CODE_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAUSEFS_Type / tns:prodProdukt_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:EFMProdukt_ID_Type
Properties	content: complex
Model	produktNummer{0,1} , organisationID
Children	organisationID, produktNummer
Instance	<pre><tns:prodProdukt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <produktNummer>{0,1}</produktNummer> <organisationID>{1,1}</organisationID> </tns:prodProdukt_ID></pre>
Source	<code><xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAUSEFS_Type / tns:berBerechtigung_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></pre>
Source	<code><xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAUSEFS_Type / tns:transSelektionKriterien

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:SelektionKriterien_Type
Type hierarchy	<ul style="list-style-type: none"> xs:dateTime

	<ul style="list-style-type: none"> • tns:DateTime • tns:SelektionKriterien_Type
Properties	content: simple
Source	<code><xs:element name="transSelektionKriterien" type="tns:SelektionKriterien_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAUSEFS_Type / tns:txpp


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_PP_Type
Properties	content: complex
Model	tns:ppLeistungsPreis , tns:ppMehrwertsteuer
Children	tns:ppLeistungsPreis, tns:ppMehrwertsteuer
Instance	<pre><tns:txpp xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:ppLeistungsPreis>{1,1}</tns:ppLeistungsPreis> <tns:ppMehrwertsteuer>{1,1}</tns:ppMehrwertsteuer> </tns:txpp></pre>
Source	<code><xs:element name="txpp" type="tns:TX_PP_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAUSEFS_Type / tns:txefslog


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_EFSLOG_Type
Properties	content: complex minOccurs: 1 maxOccurs: unbounded
Model	tns:efsFahrgastTyp , tns:efsVerkehrsmittelKategorie , tns:efsLogServiceKlasse , tns:efsServiceKlasseExtra , tns:efsStartort_ID , tns:efsZielort_ID , tns:efsViaOrte_IDs , tns:efsLogMitnahme+ , tns:txberlog , tns:txlog
Children	tns:efsFahrgastTyp, tns:efsLogMitnahme, tns:efsLogServiceKlasse, tns:efsServiceKlasseExtra, tns:efsStartort_ID, tns:efsVerkehrsmittelKategorie, tns:efsViaOrte_IDs, tns:efsZielort_ID, tns:txberlog, tns:txlog
Instance	<code><tns:txefslog xmlns:tns="http://vdv/ka/kvp-dl-pv/2"></code>

	<pre> <tns:efsFahrgastTyp>{1,1}</tns:efsFahrgastTyp> <tns:efsVerkehrsmittelKategorie>{1,1}</tns:efsVerkehrsmittelKategorie> <tns:efsLogServiceKlasse>{1,1}</tns:efsLogServiceKlasse> <tns:efsServiceKlasseExtra>{1,1}</tns:efsServiceKlasseExtra> <tns:efsStartort_ID>{1,1}</tns:efsStartort_ID> <tns:efsZielort_ID>{1,1}</tns:efsZielort_ID> <tns:efsViaOrte_IDs>{1,1}</tns:efsViaOrte_IDs> <tns:efsLogMitnahme>{1,unbounded}</tns:efsLogMitnahme> <tns:txberlog>{1,1}</tns:txberlog> <tns:txlog>{1,1}</tns:txlog> </tns:txefslog> </pre>
Source	<code><xs:element name="txefslog" type="tns:TX_EFSLOG_Type" minOccurs="1" maxOccurs="unbounded"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

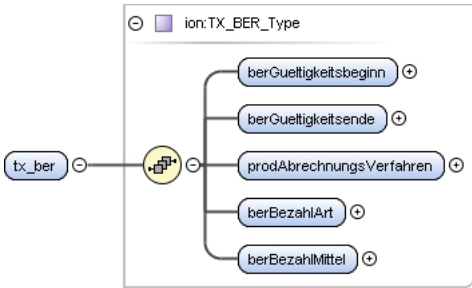
Element **tns:TXADM_Type** / **tns:transMediennummer**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:OctetString10
Properties	content: simple
Facets	length 10
Source	<code><xs:element name="transMediennummer" type="ct:OctetString10"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXADM_Type** / **tns:transappInstanz_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:NmApplikationInstanz_ID_Type
Properties	content: complex
Model	NmAppInstanznummer , kvp_ID
Children	NmAppInstanznummer, kvp_ID
Instance	<pre> <tns:transappInstanz_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <NmAppInstanznummer>{1,1}</NmAppInstanznummer> <kvp_ID>{1,1}</kvp_ID> </tns:transappInstanz_ID> </pre>
Source	<code><xs:element name="transappInstanz_ID" type="ion:NmApplikationInstanz_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXABER_Type** / **tns:tx_ber**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_BER_Type

Properties	content: complex
Model	berGueltigkeitsbeginn , berGueltigkeitsende , prodAbrechnungsVerfahren , berBezahlArt , berBezahlMittel
Children	berBezahlArt, berBezahlMittel, berGueltigkeitsbeginn, berGueltigkeitsende, prodAbrechnungsVerfahren
Instance	<pre><tns:tx_ber xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berGueltigkeitsbeginn>{1,1}</berGueltigkeitsbeginn> <berGueltigkeitsende>{1,1}</berGueltigkeitsende> <prodAbrechnungsVerfahren>{1,1}</prodAbrechnungsVerfahren> <berBezahlArt>{1,1}</berBezahlArt> <berBezahlMittel>{1,1}</berBezahlMittel> </tns:tx_ber></pre>
Source	<code><xs:element name="tx_ber" type="ion:TX_BER_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXABER_Type` / `tns:berechtigungTarifbereich`

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	xs:hexBinary
Properties	content: simple
Source	<code><xs:element name="berechtigungTarifbereich" type="xs:hexBinary"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXABER_Type` / `tns:berechtigungTarifbereichZusatz`

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	xs:hexBinary
Properties	content: simple minOccurs: 0
Source	<code><xs:element name="berechtigungTarifbereichZusatz" type="xs:hexBinary" minOccurs="0"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXABER_Type` / `tns:ausgabeTransaktionBerechtigung`

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:ausgabeTransaktionBerechtigung xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:ausgabeTransaktionBerechtigung></pre>
Source	<code><xs:element name="ausgabeTransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXABER_Type` / `tns:berNmTransaktionMAC`

Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Diagram	
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schluesel_ID , berMAC_KVP_Schluesel_ID
Children	berMAC_KVP, berMAC_KVP_Schluesel_ID, berMAC_PV, berMAC_PV_Schluesel_ID
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schluesel_ID>{1,1}</berMAC_PV_Schluesel_ID> <berMAC_KVP_Schluesel_ID>{1,1}</berMAC_KVP_Schluesel_ID> </tns:berNmTransaktionMAC></pre>
Source	<code><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXEBER_Type / tns:fahrttransaktion

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:fahrttransaktion xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:fahrttransaktion></pre>
Source	<code><xs:element name="fahrttransaktion" type="ion:Transaktionsdatensatz_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXEBER_Type / tns:berNmTransaktionMAC

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schluesel_ID , berMAC_KVP_Schluesel_ID
Children	berMAC_KVP, berMAC_KVP_Schluesel_ID, berMAC_PV, berMAC_PV_Schluesel_ID
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> </tns:berNmTransaktionMAC></pre>

	<pre><berMAC_PV_Schlüssel_ID>{1,1}</berMAC_PV_Schlüssel_ID> <berMAC_KVP_Schlüssel_ID>{1,1}</berMAC_KVP_Schlüssel_ID> </tns:berNmTransaktionMAC></pre>
Source	<code><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXAEBER_Type** / **tns:tx_ber**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_BER_Type
Properties	content: complex
Model	berGueltigkeitsbeginn, berGueltigkeitsende, prodAbrechnungsVerfahren, berBezahlArt, berBezahlMittel
Children	berBezahlArt, berBezahlMittel, berGueltigkeitsbeginn, berGueltigkeitsende, prodAbrechnungsVerfahren
Instance	<pre><tns:tx_ber xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berGueltigkeitsbeginn>{1,1}</berGueltigkeitsbeginn> <berGueltigkeitsende>{1,1}</berGueltigkeitsende> <prodAbrechnungsVerfahren>{1,1}</prodAbrechnungsVerfahren> <berBezahlArt>{1,1}</berBezahlArt> <berBezahlMittel>{1,1}</berBezahlMittel> </tns:tx_ber></pre>
Source	<code><xs:element name="tx_ber" type="ion:TX_BER_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXAEBER_Type** / **tns:berechtigungTarifbereich**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	xs:hexBinary
Properties	content: simple
Source	<code><xs:element name="berechtigungTarifbereich" type="xs:hexBinary"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXAENBER_Type** / **tns:fahrttransaktion**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:fahrttransaktion xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:fahrttransaktion></pre>

Source	<code><xs:element name="fahrttransaktion" type="ion:Transaktionsdatensatz_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXAENBER_Type** / **tns:berNmTransaktionMAC**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schlüssel_ID , berMAC_KVP_Schlüssel_ID
Children	berMAC_KVP, berMAC_KVP_Schlüssel_ID, berMAC_PV, berMAC_PV_Schlüssel_ID
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schlüssel_ID>{1,1}</berMAC_PV_Schlüssel_ID> <berMAC_KVP_Schlüssel_ID>{1,1}</berMAC_KVP_Schlüssel_ID> </tns:berNmTransaktionMAC></pre>
Source	<code><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXRBER_Type** / **tns:ruecknahmeTransaktionBerechtigung**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:ruecknahmeTransaktionBerechtigung xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:ruecknahmeTransaktionBerechtigung></pre>
Source	<code><xs:element name="ruecknahmeTransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXRBER_Type** / **tns:berNmTransaktionMAC**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:berNmTransaktionMAC_Type

Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schluesssel_ID , berMAC_KVP_Schluesssel_ID
Children	berMAC_KVP, berMAC_KVP_Schluesssel_ID, berMAC_PV, berMAC_PV_Schluesssel_ID
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schluesssel_ID>{1,1}</berMAC_PV_Schluesssel_ID> <berMAC_KVP_Schluesssel_ID>{1,1}</berMAC_KVP_Schluesssel_ID> </tns:berNmTransaktionMAC></pre>
Source	<code><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXAMBER_Type** / **tns:tx_abkey**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_ABKEY_Type
Properties	content: complex
Model	tns:berAbleitungsdaten
Children	tns:berAbleitungsdaten
Instance	<pre><tns:tx_abkey xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:berAbleitungsdaten>{1,1}</tns:berAbleitungsdaten> </tns:tx_abkey></pre>
Source	<code><xs:element name="tx_abkey" type="tns:TX_ABKEY_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXEMBER_Type** / **tns:tx_abkey**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_ABKEY_Type
Properties	content: complex
Model	tns:berAbleitungsdaten
Children	tns:berAbleitungsdaten
Instance	<pre><tns:tx_abkey xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:berAbleitungsdaten>{1,1}</tns:berAbleitungsdaten> </tns:tx_abkey></pre>
Source	<code><xs:element name="tx_abkey" type="tns:TX_ABKEY_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXRMBER_Type** / **tns:tx_abkey**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_ABKEY_Type
Properties	content: complex

Model	tns:berAbleitungsdaten
Children	tns:berAbleitungsdaten
Instance	<pre><tns:tx_abkey xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:berAbleitungsdaten>{1,1}</tns:berAbleitungsdaten> </tns:tx_abkey></pre>
Source	<pre><xs:element name="tx_abkey" type="tns:TX_ABKEY_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXASKON_Type / tns:samSAM_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:SAM_ID_Type
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree tns:SAM_ID_Type
Properties	content: simple
Facets	maxInclusive 16777215 minInclusive 0
Source	<pre><xs:element name="samSAM_ID" type="ion:SAM_ID_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXASKON_Type / tns:samSchluessel_ID


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer, schluesselVersion, schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><tns:samSchluessel_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </tns:samSchluessel_ID></pre>
Source	<pre><xs:element name="samSchluessel_ID" type="ion:SymSchluessel_ID_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXASKON_Type / tns:samLoadKeyZaehler


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:INT4
Properties	content: simple
Facets	maxInclusive 4294967295

	minInclusive 0
Source	<code><xs:element name="samLoadKeyZaehler" type="ct:INT4" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

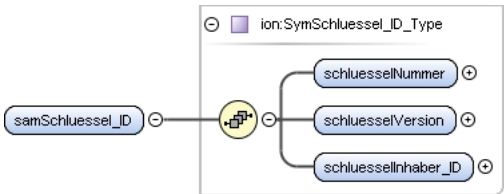
Element **tns:TXASKON_Type** / **tns:samNutzungsLimitNeu**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:INT4
Properties	content: simple
Facets	maxInclusive 4294967295 minInclusive 0
Source	<code><xs:element name="samNutzungsLimitNeu" type="ct:INT4" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXUEBERKON_Type** / **tns:samSAM_ID**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:SAM_ID_Type
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree tns:SAM_ID_Type
Properties	content: simple
Facets	maxInclusive 16777215 minInclusive 0
Source	<code><xs:element name="samSAM_ID" type="ion:SAM_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXUEBERKON_Type** / **tns:samSchluessel_ID**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><tns:samSchluessel_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </tns:samSchluessel_ID></pre>
Source	<code><xs:element name="samSchluessel_ID" type="ion:SymSchluessel_ID_Type" /></code>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---

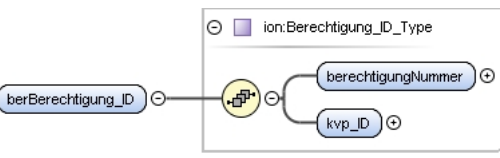
Element **tns:TXUEBERKON_Type** / **tns:samLoadKeyZaehler**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	 The diagram shows a blue rounded rectangle labeled 'samLoadKeyZaehler' connected to a purple rounded rectangle labeled 'ct:INT4'.
Type	tns:INT4
Properties	content: simple
Facets	maxInclusive 4294967295 minInclusive 0
Source	<code><xs:element name="samLoadKeyZaehler" type="ct:INT4" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXUEBERKON_Type** / **tns:samNutzungsLimitGen**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	 The diagram shows a blue rounded rectangle labeled 'samNutzungsLimitGen' connected to a purple rounded rectangle labeled 'ct:INT4'.
Type	tns:INT4
Properties	content: simple
Facets	maxInclusive 4294967295 minInclusive 0
Source	<code><xs:element name="samNutzungsLimitGen" type="ct:INT4" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXBEKODL_Type** / **tns:berBerechtigung_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	 The diagram shows a blue rounded rectangle labeled 'berBerechtigung_ID' connected to a yellow circle with a plus sign, which is then connected to a purple rounded rectangle labeled 'ion:Berechtigung_ID_Type'. Inside the 'ion:Berechtigung_ID_Type' box, there are two blue rounded rectangles: 'berechtigungNummer' and 'kvp_ID'.
Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<code><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></code>
Source	<code><xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXBEKODL_Type** / **tns:txpp**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	 The diagram shows a blue rounded rectangle labeled 'txpp' connected to a yellow circle with a plus sign, which is then connected to a purple rounded rectangle labeled 'tns:TX_PP_Type'. Inside the 'tns:TX_PP_Type' box, there are two blue rounded rectangles: 'ppLeistungsPreis' and 'ppMehrwertsteuer'.

Type	tns:TX_PP_Type
Properties	content: complex
Model	tns:ppLeistungsPreis , tns:ppMehrwertsteuer
Children	tns:ppLeistungsPreis, tns:ppMehrwertsteuer
Instance	<pre><tns:txpp xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:ppLeistungsPreis>{1,1}</tns:ppLeistungsPreis> <tns:ppMehrwertsteuer>{1,1}</tns:ppMehrwertsteuer> </tns:txpp></pre>
Source	<code><xs:element name="txpp" type="tns:TX_PP_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXBEKODL_Type / tns:fahrttransaktion


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex maxOccurs: unbounded
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:fahrttransaktion xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:fahrttransaktion></pre>
Source	<code><xs:element name="fahrttransaktion" type="ion:Transaktionsdatensatz_Type" maxOccurs="unbounded"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXBEKODL_Type / tns:berNmTransaktionMAC

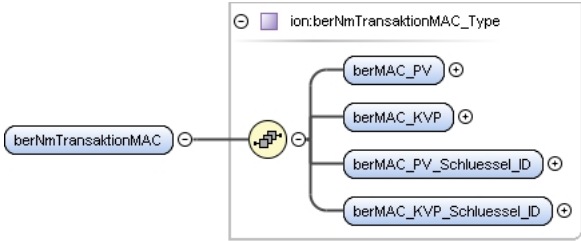
Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schlüssel_ID , berMAC_KVP_Schlüssel_ID
Children	berMAC_KVP, berMAC_KVP_Schlüssel_ID, berMAC_PV, berMAC_PV_Schlüssel_ID
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schlüssel_ID>{1,1}</berMAC_PV_Schlüssel_ID> <berMAC_KVP_Schlüssel_ID>{1,1}</berMAC_KVP_Schlüssel_ID> </tns:berNmTransaktionMAC></pre>
Source	<code><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXBEWEBKOKVP_Type / tns:belastungstransaktionBerechtigung


Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:belastungstransaktionBerechtigung xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:belastungstransaktionBerechtigung></pre>
Source	<pre><xs:element name="belastungstransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

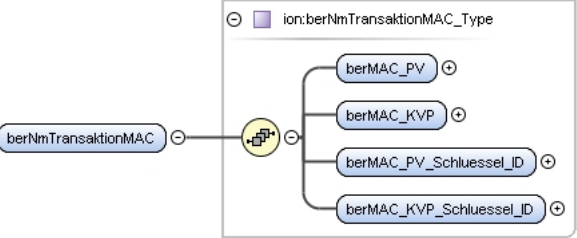
Element tns:TXBEWEBKOKVP_Type / tns:berNmTransaktionMAC

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schluessel_ID , berMAC_KVP_Schluessel_ID
Children	berMAC_KVP, berMAC_KVP_Schluessel_ID, berMAC_PV, berMAC_PV_Schluessel_ID
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schluessel_ID>{1,1}</berMAC_PV_Schluessel_ID> <berMAC_KVP_Schluessel_ID>{1,1}</berMAC_KVP_Schluessel_ID> </tns:berNmTransaktionMAC></pre>
Source	<pre><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd


Element tns:TXGKO_Type / tns:belastungstransaktionBerechtigung

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:belastungstransaktionBerechtigung xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:belastungstransaktionBerechtigung></pre>
Source	<pre><xs:element name="belastungstransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

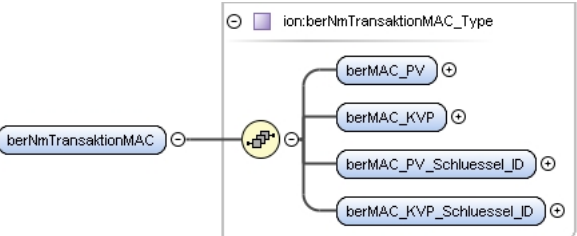
Element **tns:TXGKO_Type** / **tns:berNmTransaktionMAC**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schlüssel_ID , berMAC_KVP_Schlüssel_ID
Children	berMAC_KVP, berMAC_KVP_Schlüssel_ID, berMAC_PV, berMAC_PV_Schlüssel_ID
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schlüssel_ID>{1,1}</berMAC_PV_Schlüssel_ID> <berMAC_KVP_Schlüssel_ID>{1,1}</berMAC_KVP_Schlüssel_ID> </tns:berNmTransaktionMAC></pre>
Source	<pre><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXGWEB_Type** / **tns:belastungstransaktionBerechtigung**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:belastungstransaktionBerechtigung xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:belastungstransaktionBerechtigung></pre>
Source	<pre><xs:element name="belastungstransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXGWEB_Type** / **tns:berNmTransaktionMAC**

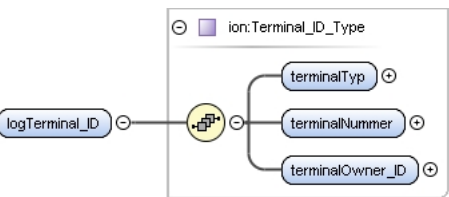
Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schlüssel_ID , berMAC_KVP_Schlüssel_ID

Children	berMAC_KVP, berMAC_KVP_Schlüssel_ID, berMAC_PV, berMAC_PV_Schlüssel_ID
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schlüssel_ID>{1,1}</berMAC_PV_Schlüssel_ID> <berMAC_KVP_Schlüssel_ID>{1,1}</berMAC_KVP_Schlüssel_ID> </tns:berNmTransaktionMAC></pre>
Source	<code><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd


Element tns:TXKNAWA_Type / tns:logTransaktionsOperator_ID

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:ReferenceNumberTwo				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="logTransaktionsOperator_ID" type="ct:ReferenceNumberTwo"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element tns:TXKNAWA_Type / tns:logTerminal_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Terminal_ID_Type
Properties	content: complex
Model	terminalTyp, terminalNummer, terminalOwner_ID
Children	terminalNummer, terminalOwner_ID, terminalTyp
Instance	<pre><tns:logTerminal_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <terminalTyp>{1,1}</terminalTyp> <terminalNummer>{1,1}</terminalNummer> <terminalOwner_ID>{1,1}</terminalOwner_ID> </tns:logTerminal_ID></pre>
Source	<code><xs:element name="logTerminal_ID" type="ion:Terminal_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXKNAWA_Type / tns:logTransaktionsZeitpunkt

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:DateTimeCompact
Properties	content: simple

Facets	maxInclusive	2117-12-31T23:59:58
	minInclusive	1990-01-01T00:00:00
Source	<xs:element name="logTransaktionsZeitpunkt" type="ct:DateTimeCompact"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd	

Element tns:TXKNAWA_Type / tns:logTransaktionsOrt_ID

Namespace	http://vdv/ka/kvp-dl-pv/2	
Diagram		
Type	tns:Ort_ID_Type	
Properties	content:	complex
Model	ortTyp , ortNummer , ortDomaene_ID	
Children	ortDomaene_ID, ortNummer, ortTyp	
Instance	<pre><tns:logTransaktionsOrt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:logTransaktionsOrt_ID></pre>	
Source	<xs:element name="logTransaktionsOrt_ID" type="ion:Ort_ID_Type"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd	

Element tns:TXKNAWA_Type / tns:logValidationCode

Namespace	http://vdv/ka/kvp-dl-pv/2	
Diagram		
Type	tns:Validation_CODE_Type	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:Validation_CODE_Type 	
Properties	content:	simple
Facets	maxInclusive	255
	minInclusive	0
	enumeration	0 Keine Angabe
	enumeration	1 Daten nicht authentisch
	enumeration	2 Zeitlich unguelteig
	enumeration	3 Raeumlich unguelteig
	enumeration	4 Persoenlich unguelteig (fuer personengebundene Objekte)
	enumeration	5 gesperrter SAM (nur Statische Berechtigung)
	enumeration	6 gesperrte ORG (nur Statische Berechtigung)
	enumeration	7 sym. Schluessel gesperrt oder nicht vorhanden
	enumeration	8 asym. Schuessel gesperrt oder nicht vorhanden
	enumeration	9 Status im App. Verzeichnis nicht gesetzt
	enumeration	10 Ausgabetransaktionskennung fehlt
	enumeration	11 Transportmittelkategorie abweichend vom aktuellen Verkehrsmittel

	enumeration	19	gesperrrt (EN 1545-1 blocked (19))
Source	<xs:element name="logValidationCode" type="tns:Validation_CODE_Type" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TXKNAWA_Type / tns:appInstanz_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	<pre>classDiagram class appInstanz_ID class NmAppInstanznummer class kvp_ID appInstanz_ID -- "1" choice choice NmAppInstanznummer kvp_ID end</pre>
Type	tns:NmApplikationInstanz_ID_Type
Properties	content: complex
Model	NmAppInstanznummer , kvp_ID
Children	NmAppInstanznummer, kvp_ID
Instance	<pre><tns:appInstanz_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <NmAppInstanznummer>{1,1}</NmAppInstanznummer> <kvp_ID>{1,1}</kvp_ID> </tns:appInstanz_ID></pre>
Source	<pre><xs:element name="appInstanz_ID" type="ion:NmApplikationInstanz_ID_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXKNAWB_Type / tns:logTransaktionsOperator_ID

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:ReferenceNumberTwo		
Type hierarchy	<ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT2<ul style="list-style-type: none">• tns:ReferenceNumberTwo		
Properties	content:	simple	
Facets	maxInclusive	65535	
	minInclusive	0	
Source	<xs:element name="logTransaktionsOperator_ID" type="ct:ReferenceNumberTwo"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TXKNAWB_Type / tns:logTerminal_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	<pre>classDiagram class logTerminal_ID class ionTerminal_ID_Type["ion:Terminal_ID_Type"] logTerminal_ID -- ionTerminal_ID_Type class ionTerminal_ID_Type { terminalTyp terminalNumber terminalOwner_ID }</pre>
Type	tns:Terminal_ID_Type
Properties	content: complex
Model	terminalTyp , terminalNumber , terminalOwner_ID
Children	terminalNumber, terminalOwner_ID, terminalTyp

Instance	<pre><tns:logTerminal_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <terminalTyp>{1,1}</terminalTyp> <terminalNummer>{1,1}</terminalNummer> <terminalOwner_ID>{1,1}</terminalOwner_ID> </tns:logTerminal_ID></pre>
Source	<pre><xs:element name="logTerminal_ID" type="ion:Terminal_ID_Type" /></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXKNAWB_Type / tns:logTransaktionsZeitpunkt

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:DateTimeCompact				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>2117-12-31T23:59:58</td></tr> <tr> <td>minInclusive</td><td>1990-01-01T00:00:00</td></tr> </table>	maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58				
minInclusive	1990-01-01T00:00:00				
Source	<pre><xs:element name="logTransaktionsZeitpunkt" type="ct:DateTimeCompact" /></pre>				
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element tns:TXKNAWB_Type / tns:logTransaktionsOrt_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:logTransaktionsOrt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:logTransaktionsOrt_ID></pre>
Source	<pre><xs:element name="logTransaktionsOrt_ID" type="ion:Ort_ID_Type" /></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXKNAWB_Type / tns:logValidationCode

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:Validation_CODE_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:Validation_CODE_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				

	enumeration	0	Keine Angabe
	enumeration	1	Daten nicht authentisch
	enumeration	2	Zeitlich ungültig
	enumeration	3	Räumlich ungültig
	enumeration	4	Persoenlich ungültig (fuer personengebundene Objekte)
	enumeration	5	gesperrter SAM (nur Statische Berechtigung)
	enumeration	6	gesperrte ORG (nur Statische Berechtigung)
	enumeration	7	sym. Schlüssel gesperrt oder nicht vorhanden
	enumeration	8	asym. Schlüssel gesperrt oder nicht vorhanden
	enumeration	9	Status im App. Verzeichnis nicht gesetzt
	enumeration	10	Ausgabetransaktionskennung fehlt
	enumeration	11	Transportmittelkategorie abweichend vom aktuellen Verkehrsmittel
	enumeration	19	gesperrt (EN 1545-1 blocked (19))
Source	<xs:element name="logValidationCode" type="tns:Validation_CODE_Type"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TXKNAWB_Type / tns:berBerechtigung_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer, kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></pre>
Source	<xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXLPEB_Type / tns:einzahlungsbelegBerechtigung

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:einzahlungsbelegBerechtigung xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:einzahlungsbelegBerechtigung></pre>
Source	<xs:element name="einzahlungsbelegBerechtigung" type="ion:Transaktionsdatensatz_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXLPEB_Type** / **tns:berNmTransaktionMAC**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schluesel_ID , berMAC_KVP_Schluesel_ID
Children	berMAC_KVP, berMAC_KVP_Schluesel_ID, berMAC_PV, berMAC_PV_Schluesel_ID
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schluesel_ID>{1,1}</berMAC_PV_Schluesel_ID> <berMAC_KVP_Schluesel_ID>{1,1}</berMAC_KVP_Schluesel_ID> </tns:berNmTransaktionMAC></pre>
Source	<code><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXSANFB_Type** / **tns:berBerechtigung_ID**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></pre>
Source	<code><xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXSANFB_Type** / **tns:prodProdukt_ID**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:EFMProdukt_ID_Type
Properties	content: complex
Model	produktNummer{0,1} , organisationID
Children	organisationID, produktNummer

Instance	<pre><tns:prodProdukt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <produktNummer>{0,1}</produktNummer> <organisationID>{1,1}</organisationID> </tns:prodProdukt_ID></pre>
Source	<pre><xs:element name="prodProdukt_ID" type="ion:EFMPProdukt_ID_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd


Element tns:TXSANFA_Type / tns:appInstanz_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:NmApplikationInstanz_ID_Type
Properties	content: complex
Model	NmAppInstanznummer , kvp_ID
Children	NmAppInstanznummer, kvp_ID
Instance	<pre><tns:appInstanz_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <NmAppInstanznummer>{1,1}</NmAppInstanznummer> <kvp_ID>{1,1}</kvp_ID> </tns:appInstanz_ID></pre>
Source	<pre><xs:element name="appInstanz_ID" type="ion:NmApplikationInstanz_ID_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSMITB_Type / tns:berSperrkandidat

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berSperrkandidat xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berSperrkandidat></pre>
Source	<pre><xs:element name="berSperrkandidat" type="ion:Berechtigung_ID_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSMITO_Type / tns:orgSperrkandidat

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Organisation_ID
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID

Properties	content: simple
Facets	maxInclusive 65535
	minInclusive 0
Source	<code><xs:element name="orgSperrkandidat" type="ka:Organisation_ID"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXSMITS_Type` / `tns:samSperrkandidat`

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:SAM_ID_Type
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT3 • tns:ReferenceNumberThree • tns:SAM_ID_Type
Properties	content: simple
Facets	maxInclusive 16777215
	minInclusive 0
Source	<code><xs:element name="samSperrkandidat" type="ion:SAM_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXSFREIMITB_Type` / `tns:berSperrkandidat`


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer, kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berSperrkandidat xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berSperrkandidat></pre>
Source	<code><xs:element name="berSperrkandidat" type="ion:Berechtigung_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXSFREIMITO_Type` / `tns:orgSperrkandidat`

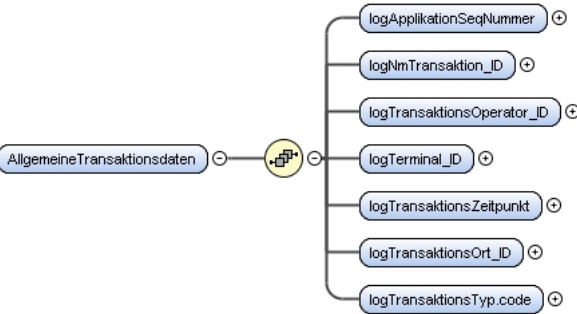
Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Organisation_ID
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT2 • tns:ReferenceNumberTwo

	<ul style="list-style-type: none"> • tns:Organisation_ID
Properties	content: simple
Facets	maxInclusive 65535
	minInclusive 0
Source	<code><xs:element name="orgSperrkandidat" type="ka:Organisation_ID" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSFREIMITS_Type / tns:samSperrkandidat

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:SAM_ID_Type
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT3 • tns:ReferenceNumberThree • tns:SAM_ID_Type
Properties	content: simple
Facets	maxInclusive 16777215
	minInclusive 0
Source	<code><xs:element name="samSperrkandidat" type="ion:SAM_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:AllgemeineTransaktionsdaten

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: AllgemeineTransaktionsdaten
Diagram	
Properties	content: complex
Used by	Complex Type tns:TXTRANSABBRUCH_Type
Model	tns:logApplikationSeqNummer, tns:logNmTransaktion_ID, tns:logTransaktionsOperator_ID, tns:logTerminal_ID, tns:logTransaktionsZeitpunkt, tns:logTransaktionsOrt_ID, tns:logTransaktionsTyp.code
Children	tns:logApplikationSeqNummer, tns:logNmTransaktion_ID, tns:logTerminal_ID, tns:logTransaktionsOperator_ID, tns:logTransaktionsOrt_ID, tns:logTransaktionsTyp.code, tns:logTransaktionsZeitpunkt
Instance	<pre> <tns:AllgemeineTransaktionsdaten xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:logApplikationSeqNummer>{1,1}</tns:logApplikationSeqNummer> <tns:logNmTransaktion_ID>{1,1}</tns:logNmTransaktion_ID> <tns:logTransaktionsOperator_ID>{1,1}</tns:logTransaktionsOperator_ID> <tns:logTerminal_ID>{1,1}</tns:logTerminal_ID> <tns:logTransaktionsZeitpunkt>{1,1}</tns:logTransaktionsZeitpunkt> <tns:logTransaktionsOrt_ID>{1,1}</tns:logTransaktionsOrt_ID> <tns:logTransaktionsTyp.code>{1,1}</tns:logTransaktionsTyp.code> </tns:AllgemeineTransaktionsdaten> </pre>

Source	<pre> <xs:element name="AllgemeineTransaktionsdaten"> <xs:annotation> <xs:documentation>Element: AllgemeineTransaktionsdaten</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="logApplikationSeqNummer" type="ct:SequenceNumberTwo"/> <xs:element name="logNmTransaktion_ID" type="tns:NmTransaktion_ID_Type"/> <xs:element name="logTransaktionsOperator_ID" type="ct:ReferenceNumberTwo"/> <xs:element name="logTerminal_ID" type="ion:Terminal_ID_Type"/> <xs:element name="logTransaktionsZeitpunkt" type="ct:DateTimeCompact"/> <xs:element name="logTransaktionsOrt_ID" type="ion:Ort_ID_Type"/> <xs:element name="logTransaktionsTyp.code" type="ct:INT1"/> </xs:sequence> </xs:complexType> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:AllgemeineTransaktionsdaten / tns:logApplikationSeqNummer

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:SequenceNumberTwo				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:SequenceNumberTwo 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<pre><xs:element name="logApplikationSeqNummer" type="ct:SequenceNumberTwo"/></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element tns:AllgemeineTransaktionsdaten / tns:logNmTransaktion_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:NmTransaktion_ID_Type
Properties	content: complex
Model	tns:samSequenznummer, tns:SAM_ID.samNummer
Children	tns:SAM_ID.samNummer, tns:samSequenznummer
Instance	<pre> <tns:logNmTransaktion_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:samSequenznummer>{1,1}</tns:samSequenznummer> <tns:SAM_ID.samNummer>{1,1}</tns:SAM_ID.samNummer> </tns:logNmTransaktion_ID> </pre>
Source	<pre><xs:element name="logNmTransaktion_ID" type="tns:NmTransaktion_ID_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:AllgemeineTransaktionsdaten / tns:logTransaktionsOperator_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:ReferenceNumberTwo

Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo
Properties	content: simple
Facets	maxInclusive 65535 minInclusive 0
Source	<code><xs:element name="logTransaktionsOperator_ID" type="ct:ReferenceNumberTwo"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:AllgemeineTransaktionsdaten / tns:logTerminal_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Terminal_ID_Type
Properties	content: complex
Model	terminalTyp , terminalNummer , terminalOwner_ID
Children	terminalNummer, terminalOwner_ID, terminalTyp
Instance	<pre><tns:logTerminal_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <terminalTyp>{1,1}</terminalTyp> <terminalNummer>{1,1}</terminalNummer> <terminalOwner_ID>{1,1}</terminalOwner_ID> </tns:logTerminal_ID></pre>
Source	<code><xs:element name="logTerminal_ID" type="ion:Terminal_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:AllgemeineTransaktionsdaten / tns:logTransaktionsZeitpunkt

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:DateTimeCompact
Properties	content: simple
Facets	maxInclusive 2117-12-31T23:59:58 minInclusive 1990-01-01T00:00:00
Source	<code><xs:element name="logTransaktionsZeitpunkt" type="ct:DateTimeCompact"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:AllgemeineTransaktionsdaten / tns:logTransaktionsOrt_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	

Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:logTransaktionsOrt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:logTransaktionsOrt_ID></pre>
Source	<code><xs:element name="logTransaktionsOrt_ID" type="ion:Ort_ID_Type" /></code>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:AllgemeineTransaktionsdaten / tns:logTransaktionsTyp.code

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:INT1				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<code><xs:element name="logTransaktionsTyp.code" type="ct:INT1" /></code>				
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element tns:TXTRANSABBRUCH_Type / tns:MKAH-PV-NM-MAC_ID

Namespace	http://vdv/ka/kvp-dl-pv/2						
Diagram							
Type	tns:SymSchluessel_ID_Type						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID						
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion						
Instance	<pre><tns:MKAH-PV-NM-MAC_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </tns:MKAH-PV-NM-MAC_ID></pre>						
Source	<code><xs:element name="MKAH-PV-NM-MAC_ID" type="ion:SymSchluessel_ID_Type" minOccurs="0" maxOccurs="1" /></code>						
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd						

Element tns:TXTRANSABBRUCH_Type / tns:MKAH-PV-Nutzungszaehler

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:ReferenceNumberFour

Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT4 • tns:ReferenceNumberFour 						
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0		
maxInclusive	4294967295						
minInclusive	0						
Source	<code><xs:element name="MKAH-PV-Nutzungszaehler" type="ct:ReferenceNumberFour" minOccurs="0" maxOccurs="1" /></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd						

Element tns:TXTRANSABBRUCH_Type / tns:MKKVP--NM-MAC_ID

Namespace	http://vdv/ka/kvp-dl-pv/2						
Diagram							
Type	tns:SymSchluessel_ID_Type						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID						
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion						
Instance	<pre><tns:MKKVP--NM-MAC_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </tns:MKKVP--NM-MAC_ID></pre>						
Source	<code><xs:element name="MKKVP--NM-MAC_ID" type="ion:SymSchluessel_ID_Type" minOccurs="0" maxOccurs="1" /></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd						

Element tns:TXTRANSABBRUCH_Type / tns:MKKVP-Nutzungszaehler

Namespace	http://vdv/ka/kvp-dl-pv/2						
Diagram							
Type	tns:ReferenceNumberFour						
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT4 • tns:ReferenceNumberFour 						
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0		
maxInclusive	4294967295						
minInclusive	0						
Source	<code><xs:element name="MKKVP-Nutzungszaehler" type="ct:ReferenceNumberFour" minOccurs="0" maxOccurs="1" /></code>						

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---

Element tns:TXADM

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Antwort auf Anfrage wegen Defektem Medium
Diagram	
Type	tns:TXADM_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXADM_Type
Properties	content: complex
Model	txbase , tns:transMediennummer , tns:transappInstanz_ID
Children	tns:transMediennummer, tns:transappInstanz_ID, txbase
Instance	<pre><tns:TXADM xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:transMediennummer>{1,1}</tns:transMediennummer> <tns:transappInstanz_ID>{1,1}</tns:transappInstanz_ID> </tns:TXADM></pre>
Source	<pre><xs:element name="TXADM" type="tns:TXADM_Type"> <xs:annotation> <xs:documentation>Element: Antwort auf Anfrage wegen Defektem Medium</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAEBER

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Aenderung einer Berechtigung (nicht moeglich bei EFS)
Diagram	
Type	tns:TXAEBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAEBER_Type
Properties	content: complex
Model	txbase , tns:tx_ber , tns:berechtigungTarifbereich
Children	tns:berechtigungTarifbereich, tns:tx_ber, txbase
Instance	<pre><tns:TXAEBER xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:tx_ber>{1,1}</tns:tx_ber> <tns:berechtigungTarifbereich>{1,1}</tns:berechtigungTarifbereich> </tns:TXAEBER></pre>

	<code></tns:TXAEBER></code>
Source	<pre> <xs:element name="TXAEBER" type="tns:TXAEBER_Type"> <xs:annotation> <xs:documentation>Element: Aenderung einer Berechtigung (nicht moeglich bei EFS)</ </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAENBER

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Aenderung der Nutzertarifparameter einer Berechtigung (nicht moeglich bei EFS)
Diagram	
Type	tns:TXAENBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAENBER_Type
Properties	content: complex
Model	txbase, tns:fahrttransaktion, tns:berNmTransaktionMAC
Children	tns:berNmTransaktionMAC, tns:fahrttransaktion, txbase
Instance	<pre> <tns:TXAENBER xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:fahrttransaktion>{1,1}</tns:fahrttransaktion> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXAENBER> </pre>
Source	<pre> <xs:element name="TXAENBER" type="tns:TXAENBER_Type"> <xs:annotation> <xs:documentation>Element: Aenderung der Nutzertarifparameter einer Berechtigung (nicht moeglich bei EFS)</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAS

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Aufforderung zum Senden
Diagram	
Type	tns:TXAS_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAS_Type

Properties	content: complex
Model	txbase , transSendeAuftrag , transSendeAuftragstyp
Children	transSendeAuftrag, transSendeAuftragstyp, txbase
Instance	<pre><tns:TXAS xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <transSendeAuftrag>{1,1}</transSendeAuftrag> <transSendeAuftragstyp>{1,1}</transSendeAuftragstyp> </tns:TXAS></pre>
Source	<pre><xs:element name="TXAS" type="ion:TXAS_Type"> <xs:annotation> <xs:documentation>Element: Aufforderung zum Senden</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXASKON

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Anforderung eines neuen Kontingentes fuer einen PV-Schluessel im SAM
Diagram	<pre> classDiagram class tnsTXASKON_Type { txbase transSendeAuftrag transSendeAuftragstyp samSAM_ID samSchluessel_ID samLoadKeyZaehler samNutzungsLimitNeu } class ionTXAS_Type { <extension base="tnsTX_BASE_Type"> } class tnsTX_BASE_Type { <extension base="ionTXAS_Type"> } tnsTXASKON_Type -- > ionTXAS_Type ionTXAS_Type -- > tnsTX_BASE_Type </pre>
Type	tns:TXASKON_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAS_Type tns:TXASKON_Type
Properties	content: complex
Model	txbase , transSendeAuftrag , transSendeAuftragstyp , tns:samSAM_ID , tns:samSchluessel_ID , tns:samLoadKeyZaehler , tns:samNutzungsLimitNeu
Children	tns:samLoadKeyZaehler, tns:samNutzungsLimitNeu, tns:samSAM_ID, tns:samSchluessel_ID, transSendeAuftrag, transSendeAuftragstyp, txbase
Instance	<pre><tns:TXASKON xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <transSendeAuftrag>{1,1}</transSendeAuftrag> <transSendeAuftragstyp>{1,1}</transSendeAuftragstyp> <tns:samSAM_ID>{1,1}</tns:samSAM_ID> <tns:samSchluessel_ID>{1,1}</tns:samSchluessel_ID> <tns:samLoadKeyZaehler>{1,1}</tns:samLoadKeyZaehler> <tns:samNutzungsLimitNeu>{1,1}</tns:samNutzungsLimitNeu> </tns:TXASKON></pre>
Source	<pre><xs:element name="TXASKON" type="tns:TXASKON_Type"> <xs:annotation> <xs:documentation>Element: Anforderung eines neuen Kontingentes fuer einen PV-Schluessel im SAM</xs:documentation> </xs:annotation> </xs:element></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---

Element tns:TXUEBERKON

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Genehmigung eines neuen Kontingentes fuer einen PV-Schlüssel im SAM
Diagram	
Type	tns:TXUEBERKON_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXUEBERKON_Type
Properties	content: complex
Model	txbase , tns:samSAM_ID , tns:samSchlüssel_ID , tns:samLoadKeyZaehler , tns:samNutzungsLimitGen
Children	tns:samLoadKeyZaehler, tns:samNutzungsLimitGen, tns:samSAM_ID, tns:samSchlüssel_ID, txbase
Instance	<pre><tns:TXUEBERKON xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:samSAM_ID>{1,1}</tns:samSAM_ID> <tns:samSchlüssel_ID>{1,1}</tns:samSchlüssel_ID> <tns:samLoadKeyZaehler>{1,1}</tns:samLoadKeyZaehler> <tns:samNutzungsLimitGen>{1,1}</tns:samNutzungsLimitGen> </tns:TXUEBERKON></pre>
Source	<pre><xs:element name="TXUEBERKON" type="tns:TXUEBERKON_Type"> <xs:annotation> <xs:documentation>Element: Genehmigung eines neuen Kontingentes fuer einen PV-Schlüssel im SAM</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXBEKODL

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Transaktionsdatensatz (vom PV an den KVP) fuer eine Belastung des Kundenkontos nach Berechnung des Leistungspreises beim PV (aufgrund uebermittelter Fahrttransaktionen vom DL).
Diagram	

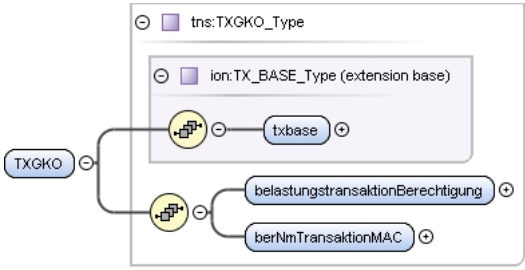
Type	tms:TXBEKODL_Type
Type hierarchy	<ul style="list-style-type: none"> tms:TX_BASE_Type tms:TXBEKODL_Type
Properties	content: complex
Model	txbase , tms:berBerechtigung_ID , tms:txpp , tms:fahrttransaktion+ , tms:berNmTransaktionMAC
Children	tms:berBerechtigung_ID, tms:berNmTransaktionMAC, tms:fahrttransaktion, tms:txpp, txbase
Instance	<pre><tms:TXBEKODL xmlns:tms="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tms:berBerechtigung_ID>{1,1}</tms:berBerechtigung_ID> <tms:txpp>{1,1}</tms:txpp> <tms:fahrttransaktion>{1,unbounded}</tms:fahrttransaktion> <tms:berNmTransaktionMAC>{1,1}</tms:berNmTransaktionMAC> </tms:TXBEKODL></pre>
Source	<pre><xs:element name="TXBEKODL" type="tms:TXBEKODL_Type"> <xs:annotation> <xs:documentation>Element: Transaktionsdatensatz (vom PV an den KVP) fuer eine Belastung des Kundenkontos nach Berechnung des Leistungspreises beim PV (aufgrund uebermittelter Fahrttransaktionen vom DL).</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tms:TXBEKOKVP

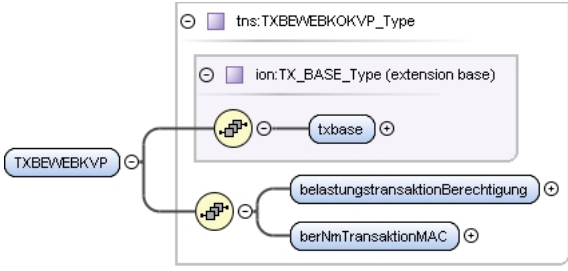
Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Belastung POB/PEB durch Kauf eines EFS (analog TXBEKODL)
Diagram	
Type	tms:TXBEWEBKOKVP_Type
Type hierarchy	<ul style="list-style-type: none"> tms:TX_BASE_Type tms:TXBEWEBKOKVP_Type
Properties	content: complex
Model	txbase , tms:belastungstransaktionBerechtigung , tms:berNmTransaktionMAC
Children	tms:belastungstransaktionBerechtigung, tms:berNmTransaktionMAC, txbase
Instance	<pre><tms:TXBEKOKVP xmlns:tms="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tms:belastungstransaktionBerechtigung>{1,1}</tms:belastungstransaktionBerechtigung> <tms:berNmTransaktionMAC>{1,1}</tms:berNmTransaktionMAC> </tms:TXBEKOKVP></pre>
Source	<pre><xs:element name="TXBEKOKVP" type="tms:TXBEWEBKOKVP_Type"> <xs:annotation> <xs:documentation>Element: Belastung POB/PEB durch Kauf eines EFS (analog TXBEKODL)</ </xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tms:TXGKO

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Gutschrift POB/PEB nach Ruecknahme Kauf eines EFS (analog TXBEKOKVP)

Diagram	
Type	tns:TXGKO_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXGKO_Type
Properties	content: complex
Model	txbase , tns:belastungstransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:belastungstransaktionBerechtigung, tns:berNmTransaktionMAC, txbase
Instance	<pre><tns:TXGKO xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:belastungstransaktionBerechtigung>{1,1}</tns:belastungstransaktionBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXGKO></pre>
Source	<pre><xs:element name="TXGKO" type="tns:TXGKO_Type"> <xs:annotation> <xs:documentation>Element: Gutschrift POB/PEB nach Ruecknahme Kauf eines EFS (analog TXBEKOKVP)</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXBEWEBKVP

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Belastung WEB durch Kauf eines EFS (analog TXBEKOKVP)
Diagram	
Type	tns:TXBEWEBKVP_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXBEWEBKVP_Type
Properties	content: complex
Model	txbase , tns:belastungstransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:belastungstransaktionBerechtigung, tns:berNmTransaktionMAC, txbase
Instance	<pre><tns:TXBEWEBKVP xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:belastungstransaktionBerechtigung>{1,1}</tns:belastungstransaktionBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXBEWEBKVP></pre>
Source	<pre><xs:element name="TXBEWEBKVP" type="tns:TXBEWEBKVP_Type"> <xs:annotation> <xs:documentation>Element: Belastung WEB durch Kauf eines EFS (analog TXBEKOKVP)</ xs:documentation> </xs:annotation> </xs:element></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---

Element tns:TXGWEB

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Gutschrift WEB nach Ruecknahme eines EFS (analog TXBEKOKVP)
Diagram	<pre> graph LR TXGWEB[tns:TXGWEB_Type] -- extension base --> TXBASE[ion:TX_BASE_Type] TXGWEB -- contains --> txbase[txbase] TXGWEB -- contains --> ber[belastungstransaktionBerechtigung] TXGWEB -- contains --> mac[berNmTransaktionMAC] </pre>
Type	tns:TXGWEB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXGWEB_Type
Properties	content: complex
Model	txbase , tns:belastungstransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:belastungstransaktionBerechtigung, tns:berNmTransaktionMAC, txbase
Instance	<pre> <tns:TXGWEB xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:belastungstransaktionBerechtigung>{1,1}</tns:belastungstransaktionBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXGWEB> </pre>
Source	<pre> <xs:element name="TXGWEB" type="tns:TXGWEB_Type"> <xs:annotation> <xs:documentation>Element: Gutschrift WEB nach Ruecknahme eines EFS (analog TXBEKOKVP)</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXABER

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Ausgabe einer Berechtigung
Diagram	<pre> graph LR TXABER[tns:TXABER_Type] -- extension base --> TXBASE[ion:TX_BASE_Type] TXABER -- contains --> txbase[txbase] TXABER -- contains --> tx_ber[tx_ber] TXABER -- contains --> ber[berechtigungTarifbereich] TXABER -- contains --> ber_zusatz[berechtigungTarifbereichZusatz] TXABER -- contains --> ausgabe[ausgabeTransaktionBerechtigung] TXABER -- contains --> mac[berNmTransaktionMAC] </pre>
Type	tns:TXABER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXABER_Type
Properties	content: complex

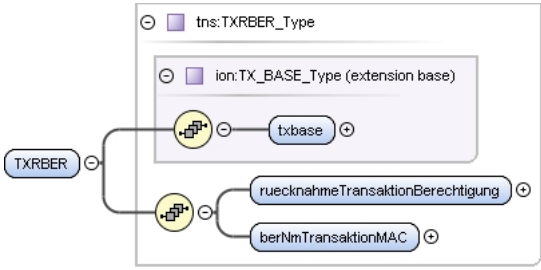
Model	txbase , tns:tx_ber , tns:berechtigungTarifbereich , tns:berechtigungTarifbereichZusatz{0,1} , tns:ausgabeTransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:ausgabeTransaktionBerechtigung, tns:berNmTransaktionMAC, tns:berechtigungTarifbereich, tns:berechtigungTarifbereichZusatz, tns:tx_ber, txbase
Instance	<pre><tns:TXABER xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:tx_ber>{1,1}</tns:tx_ber> <tns:berechtigungTarifbereich>{1,1}</tns:berechtigungTarifbereich> <tns:berechtigungTarifbereichZusatz>{0,1}</tns:berechtigungTarifbereichZusatz> <tns:ausgabeTransaktionBerechtigung>{1,1}</tns:ausgabeTransaktionBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXABER></pre>
Source	<pre><xs:element name="TXABER" type="tns:TXABER_Type"> <xs:annotation> <xs:documentation>Element: Ausgabe einer Berechtigung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXEBER

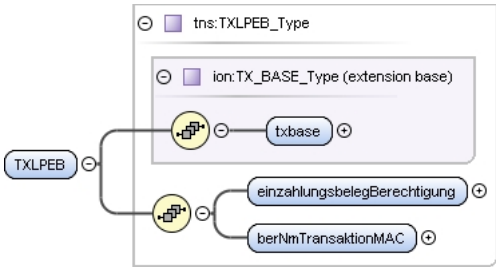
Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Erfassung einer Berechtigungstransaktion
Diagram	
Type	tns:TXEBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXEBER_Type
Properties	content: complex
Model	txbase , tns:fahrttransaktion , tns:berNmTransaktionMAC
Children	tns:berNmTransaktionMAC, tns:fahrttransaktion, txbase
Instance	<pre><tns:TXEBER xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:fahrttransaktion>{1,1}</tns:fahrttransaktion> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXEBER></pre>
Source	<pre><xs:element name="TXEBER" type="tns:TXEBER_Type"> <xs:annotation> <xs:documentation>Element: Erfassung einer Berechtigungstransaktion</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXRBER

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Ruecknahme einer Berechtigung

Diagram	
Type	tns:TXRBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXRBER_Type
Properties	content: complex
Model	txbase , tns:ruecknahmeTransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:berNmTransaktionMAC, tns:ruecknahmeTransaktionBerechtigung, txbase
Instance	<pre><tns:TXRBER xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:ruecknahmeTransaktionBerechtigung>{1,1}</tns:ruecknahmeTransaktionBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXRBER></pre>
Source	<pre><xs:element name="TXRBER" type="tns:TXRBER_Type"> <xs:annotation> <xs:documentation>Element: Ruecknahme einer Berechtigung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXLPEB

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Laden eines PEB-Kontos
Diagram	
Type	tns:TXLPEB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXLPEB_Type
Properties	content: complex
Model	txbase , tns:ezahlungsbelegBerechtigung , tns:berNmTransaktionMAC
Children	tns:berNmTransaktionMAC, tns:ezahlungsbelegBerechtigung, txbase
Instance	<pre><tns:TXLPEB xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:ezahlungsbelegBerechtigung>{1,1}</tns:ezahlungsbelegBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXLPEB></pre>
Source	<pre><xs:element name="TXLPEB" type="tns:TXLPEB_Type"> <xs:annotation> <xs:documentation>Element: Laden eines PEB-Kontos</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSANFB

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperranforderung fuer eine Berechtigung
Diagram	
Type	tns:TXSANFB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFB_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , tns:berBerechtigung_ID , tns:prodProdukt_ID
Children	sperrSperrgrund, tns:berBerechtigung_ID, tns:prodProdukt_ID, txbase
Instance	<pre><tns:TXSANFB xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> </tns:TXSANFB></pre>
Source	<pre><xs:element name="TXSANFB" type="tns:TXSANFB_Type"> <xs:annotation> <xs:documentation>Element: Sperranforderung fuer eine Berechtigung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSANFA

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperranforderung fuer eine Applikation
Diagram	
Type	tns:TXSANFA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFA_Type

Properties	content: complex
Model	txbase , sperrSperrgrund , tns:appInstanz_ID
Children	sperrSperrgrund, tns:appInstanz_ID, txbase
Instance	<pre><tns:TXSANFA xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <tns:appInstanz_ID>{1,1}</tns:appInstanz_ID> </tns:TXSANFA></pre>
Source	<pre><xs:element name="TXSANFA" type="tns:TXSANFA_Type"> <xs:annotation> <xs:documentation>Element: Sperranforderung fuer eine Applikation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSAANFB

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperraufhebungsanforderung fuer eine Berechtigung
Diagram	
Type	tns:TXSAANFB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSAANFB_Type tns:TXSAANFB_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , tns:berBerechtigung_ID , tns:prodProdukt_ID
Children	sperrSperrgrund, tns:berBerechtigung_ID, tns:prodProdukt_ID, txbase
Instance	<pre><tns:TXSAANFB xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> </tns:TXSAANFB></pre>
Source	<pre><xs:element name="TXSAANFB" type="tns:TXSAANFB_Type"> <xs:annotation> <xs:documentation>Element: Sperraufhebungsanforderung fuer eine Berechtigung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSAANFA

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperraufhebungsanforderung fuer eine Applikation

Diagram	<p>The diagram illustrates the structure of the <code>tns:TXSAANFA_Type</code>. It is an extension base for <code>tns:TX_SANF_Type</code>, which in turn extends <code>tns:TX_BASE_Type</code>. The <code>tns:TXSAANFA_Type</code> contains three elements: <code>txbase</code>, <code>sperrSperrgrund</code>, and <code>applInstanz_ID</code>. Each element is represented by a yellow circle with a plus sign, indicating a complex type. The <code>txbase</code> element is further extended by <code>tns:TX_BASE_Type</code>. The <code>sperrSperrgrund</code> and <code>applInstanz_ID</code> elements are represented by blue rounded rectangles with a plus sign, indicating simple types.</p>
Type	<code>tns:TXSAANFA_Type</code>
Type hierarchy	<ul style="list-style-type: none"> • <code>tns:TX_BASE_Type</code> <ul style="list-style-type: none"> • <code>tns:TX_SANF_Type</code> <ul style="list-style-type: none"> • <code>tns:TXSAANFA_Type</code> <ul style="list-style-type: none"> • <code>tns:TXSAANFA_Type</code>
Properties	content: complex
Model	<code>txbase</code> , <code>sperrSperrgrund</code> , <code>tns:applInstanz_ID</code>
Children	<code>sperrSperrgrund</code> , <code>tns:applInstanz_ID</code> , <code>txbase</code>
Instance	<pre><tns:TXSAANFA xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <tns:applInstanz_ID>{1,1}</tns:applInstanz_ID> </tns:TXSAANFA></pre>
Source	<pre><xs:element name="TXSAANFA" type="tns:TXSAANFA_Type"> <xs:annotation> <xs:documentation>Element: Sperraufhebungsanforderung fuer eine Applikation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXSMITB`

Namespace	<code>http://vdv/ka/kvp-dl-pv/2</code>
Annotations	Element: Sperrmitteilung Berechtigung
Diagram	<p>The diagram illustrates the structure of the <code>tns:TXSMITB_Type</code>. It is an extension base for <code>tns:TX_SMIT_Type</code>, which in turn extends <code>tns:TX_BASE_Type</code>. The <code>tns:TXSMITB_Type</code> contains three elements: <code>txbase</code>, <code>sperrAnforderungBezug</code>, and <code>berSperrkandidat</code>. Each element is represented by a yellow circle with a plus sign, indicating a complex type. The <code>txbase</code> element is further extended by <code>tns:TX_BASE_Type</code>. The <code>sperrAnforderungBezug</code> and <code>berSperrkandidat</code> elements are represented by blue rounded rectangles with a plus sign, indicating simple types.</p>
Type	<code>tns:TXSMITB_Type</code>
Type hierarchy	<ul style="list-style-type: none"> • <code>tns:TX_BASE_Type</code> <ul style="list-style-type: none"> • <code>tns:TX_SMIT_Type</code> <ul style="list-style-type: none"> • <code>tns:TXSMITB_Type</code>
Properties	content: complex

Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:berSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:berSperrkandidat, txbase
Instance	<pre><tns:TXSMITB xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <tns:berSperrkandidat>{1,1}</tns:berSperrkandidat> </tns:TXSMITB></pre>
Source	<pre><xs:element name="TXSMITB" type="tns:TXSMITB_Type"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung Berechtigung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSMITO

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperrmitteilung Organisation
Diagram	
Type	tns:TXSMITO_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITO_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:orgSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:orgSperrkandidat, txbase
Instance	<pre><tns:TXSMITO xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <tns:orgSperrkandidat>{1,1}</tns:orgSperrkandidat> </tns:TXSMITO></pre>
Source	<pre><xs:element name="TXSMITO" type="tns:TXSMITO_Type"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung Organisation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSMITS

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperrmitteilung SAM

Diagram	
Type	tns:TXSMITS_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITS_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:samSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:samSperrkandidat, txbase
Instance	<pre><tns:TXSMITS xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <tns:samSperrkandidat>{1,1}</tns:samSperrkandidat> </tns:TXSMITS></pre>
Source	<pre><xs:element name="TXSMITS" type="tns:TXSMITS_Type"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung SAM</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSFREIMITB

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperrfreigabemitteilung Berechtigung
Diagram	
Type	tns:TXSFREIMITB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITB_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:berSperrkandidat

Children	sperrAnforderungBezug, sperrEntscheidung, tns:berSperrkandidat, txbase
Instance	<pre><tns:TXSFREIMITB xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <tns:berSperrkandidat>{1,1}</tns:berSperrkandidat> </tns:TXSFREIMITB></pre>
Source	<pre><xs:element name="TXSFREIMITB" type="tns:TXSFREIMITB_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung Berechtigung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSFREIMITO

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperrfreigabemitteilung Organisation
Diagram	
Type	tns:TXSFREIMITO_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITO_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:orgSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:orgSperrkandidat, txbase
Instance	<pre><tns:TXSFREIMITO xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <tns:orgSperrkandidat>{1,1}</tns:orgSperrkandidat> </tns:TXSFREIMITO></pre>
Source	<pre><xs:element name="TXSFREIMITO" type="tns:TXSFREIMITO_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung Organisation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSFREIMITS

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperrfreigabemitteilung SAM

Diagram	
Type	tns:TXSFREIMITS_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITS_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:samSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:samSperrkandidat, txbase
Instance	<pre><tns:TXSFREIMITS xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <tns:samSperrkandidat>{1,1}</tns:samSperrkandidat> </tns:TXSFREIMITS></pre>
Source	<pre><xs:element name="TXSFREIMITS" type="tns:TXSFREIMITS_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung SAM</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAUSEFS

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Auskunft-EFS Berechtigung, Anzeige fuer Servicezwecke
Diagram	
Type	tns:TXAUSEFS_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAUSEFS_Type

Properties	content: complex
Model	txbase , tns:prodAbrechnungsVerfahren , tns:berBezahlMittel , tns:berBezahlArt , tns:prodProdukt_ID , tns:berBerechtigung_ID , tns:transSelektionKriterien , tns:txpp , tns:txefslog+
Children	tns:berBerechtigung_ID, tns:berBezahlArt, tns:berBezahlMittel, tns:prodAbrechnungsVerfahren, tns:prodProdukt_ID, tns:transSelektionKriterien, tns:txefslog, tns:txpp, txbase
Instance	<pre><tns:TXAUSEFS xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:prodAbrechnungsVerfahren>{1,1}</tns:prodAbrechnungsVerfahren> <tns:berBezahlMittel>{1,1}</tns:berBezahlMittel> <tns:berBezahlArt>{1,1}</tns:berBezahlArt> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:transSelektionKriterien>{1,1}</tns:transSelektionKriterien> <tns:txpp>{1,1}</tns:txpp> <tns:txefslog>{1,unbounded}</tns:txefslog> </tns:TXAUSEFS></pre>
Source	<pre><xs:element name="TXAUSEFS" type="tns:TXAUSEFS_Type"> <xs:annotation> <xs:documentation>Element: Auskunft-EFS Berechtigung, Anzeige fuer Servicezwecke</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXASBERAFB

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Anforderung der Daten zur Anzeige einer Preisauskunft Fahrt AFB fuer eine Berechtigung aus dem PV System
Diagram	<pre> classDiagram class tnsTXASBERAFB { txbase transSendeAuftrag transSendeAuftragstyp prodProdukt_ID berBerechtigung_ID transSelektionKriterien } class tnsTX_BASE_Type { txbase } class tnsTXAS_Type { transSendeAuftrag transSendeAuftragstyp } tnsTXASBERAFB --> tnsTX_BASE_Type tnsTXASBERAFB --> tnsTXAS_Type tnsTXASBERAFB --> prodProdukt_ID tnsTXASBERAFB --> berBerechtigung_ID tnsTXASBERAFB --> transSelektionKriterien </pre>
Type	tns:TXASBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAS_Type tns:TXASBER_Type
Properties	content: complex
Model	txbase , transSendeAuftrag , transSendeAuftragstyp , tns:prodProdukt_ID , tns:berBerechtigung_ID , tns:transSelektionKriterien
Children	tns:berBerechtigung_ID, tns:prodProdukt_ID, tns:transSelektionKriterien, transSendeAuftrag, transSendeAuftragstyp, txbase
Instance	<pre><tns:TXASBERAFB xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <transSendeAuftrag>{1,1}</transSendeAuftrag> <transSendeAuftragstyp>{1,1}</transSendeAuftragstyp> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:transSelektionKriterien>{1,1}</tns:transSelektionKriterien> </tns:TXASBERAFB></pre>
Source	<pre><xs:element name="TXASBERAFB" type="tns:TXASBER_Type"> <xs:annotation></pre>

	<pre> <xs:documentation>Element: Anforderung der Daten zur Anzeige einer Preisauskunft Fahrt AFB fuer eine Berechtigung aus dem PV System</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXASBEREFS

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Anforderung der Daten zur Anzeige einer Preisauskunft ESB (post paid) fuer eine Berechtigung aus dem PV System
Diagram	<pre> classDiagram class tnsTXASBEREFS { txbase transSendeAuftrag transSendeAuftragstyp prodProdukt_ID berBerechtigung_ID transSelektionKriterien } class tnsTX_BASE_Type { txbase } class ionTXAS_Type { } tnsTXASBEREFS -- > tnsTX_BASE_Type tnsTX_BASE_Type -- > ionTXAS_Type </pre>
Type	tns:TXASBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAS_Type tns:TXASBER_Type
Properties	content: complex
Model	txbase , transSendeAuftrag , transSendeAuftragstyp , tns:prodProdukt_ID , tns:berBerechtigung_ID , tns:transSelektionKriterien
Children	tns:berBerechtigung_ID , tns:prodProdukt_ID , tns:transSelektionKriterien , transSendeAuftrag , transSendeAuftragstyp , txbase
Instance	<pre> <tns:TXASBEREFS xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <transSendeAuftrag>{1,1}</transSendeAuftrag> <transSendeAuftragstyp>{1,1}</transSendeAuftragstyp> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:transSelektionKriterien>{1,1}</tns:transSelektionKriterien> </tns:TXASBEREFS> </pre>
Source	<pre> <xs:element name="TXASBEREFS" type="tns:TXASBER_Type"> <xs:annotation> <xs:documentation>Element: Anforderung der Daten zur Anzeige einer Preisauskunft ESB (post paid) fuer eine Berechtigung aus dem PV System</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXANLN

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Antwort auf Anforderung der Daten zur Anzeige einer Berechtigung aus dem PV System

Diagram	
Type	tns:TXANLN_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXANLN_Type
Properties	content: complex
Model	txbase , tns:prodAbrechnungsVerfahren , tns:berBezahlArt , tns:prodProdukt_ID , tns:berBerechtigung_ID , tns:transSelektionKriterien , tns:txpp , tns:txafblog+
Children	tns:berBerechtigung_ID, tns:berBezahlArt, tns:prodAbrechnungsVerfahren, tns:prodProdukt_ID, tns:transSelektionKriterien, tns:txafblog, tns:txpp, txbase
Instance	<pre> <tns:TXANLN xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:prodAbrechnungsVerfahren>{1,1}</tns:prodAbrechnungsVerfahren> <tns:berBezahlArt>{1,1}</tns:berBezahlArt> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:transSelektionKriterien>{1,1}</tns:transSelektionKriterien> <tns:txpp>{1,1}</tns:txpp> <tns:txafblog>{1,unbounded}</tns:txafblog> </tns:TXANLN> </pre>
Source	<pre> <xs:element name="TXANLN" type="tns:TXANLN_Type"> <xs:annotation> <xs:documentation>Element: Antwort auf Anforderung der Daten zur Anzeige einer Berechtigung aus dem PV System</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXTRANSABBRUCH

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Daten fuer unvollstaendig ausgefuehrte NM-Transaktion
Diagram	

Type	tns:TXTRANSABBRUCH_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXTRANSABBRUCH_Type
Properties	content: complex
Model	txbase , tns:AllgemeineTransaktionsdaten , tns:MKAH-PV-NM-MAC_ID{0,1} , tns:MKAH-PV-Nutzungszaehler{0,1} , tns:MKKVP--NM-MAC_ID{0,1} , tns:MKKVP-Nutzungszaehler{0,1}
Children	tns:AllgemeineTransaktionsdaten, tns:MKAH-PV-NM-MAC_ID, tns:MKAH-PV-Nutzungszaehler, tns:MKKVP--NM-MAC_ID, tns:MKKVP-Nutzungszaehler, txbase
Instance	<pre><tns:TXTRANSABBRUCH xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:AllgemeineTransaktionsdaten>{1,1}</tns:AllgemeineTransaktionsdaten> <tns:MKAH-PV-NM-MAC_ID>{0,1}</tns:MKAH-PV-NM-MAC_ID> <tns:MKAH-PV-Nutzungszaehler>{0,1}</tns:MKAH-PV-Nutzungszaehler> <tns:MKKVP--NM-MAC_ID>{0,1}</tns:MKKVP--NM-MAC_ID> <tns:MKKVP-Nutzungszaehler>{0,1}</tns:MKKVP-Nutzungszaehler> </tns:TXTRANSABBRUCH></pre>
Source	<pre><xs:element name="TXTRANSABBRUCH" type="tns:TXTRANSABBRUCH_Type"> <xs:annotation> <xs:documentation>Element: Daten fuer unvollstaendig ausgefuehrte NM-Transaktion</ </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXKNAWA

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Transaktionsdatensatz zum Nachweis der Kontrolle einer gesperrten oder ungueltigen Applikation
Diagram	
Type	tns:TXKNAWA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXKNAWA_Type
Properties	content: complex
Model	txbase , tns:logTransaktionsOperator_ID , tns:logTerminal_ID , tns:logTransaktionsZeitpunkt , tns:logTransaktionsOrt_ID , tns:logValidationCode , tns:applInstanz_ID
Children	tns:applInstanz_ID, tns:logTerminal_ID, tns:logTransaktionsOperator_ID, tns:logTransaktionsOrt_ID, tns:logTransaktionsZeitpunkt, tns:logValidationCode, txbase
Instance	<pre><tns:TXKNAWA xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:logTransaktionsOperator_ID>{1,1}</tns:logTransaktionsOperator_ID> <tns:logTerminal_ID>{1,1}</tns:logTerminal_ID> <tns:logTransaktionsZeitpunkt>{1,1}</tns:logTransaktionsZeitpunkt> <tns:logTransaktionsOrt_ID>{1,1}</tns:logTransaktionsOrt_ID> <tns:logValidationCode>{1,1}</tns:logValidationCode> <tns:applInstanz_ID>{1,1}</tns:applInstanz_ID> </tns:TXKNAWA></pre>

Source	<pre><xs:element name="TXKNAWA" type="tns:TXKNAWA_Type"> <xs:annotation> <xs:documentation>Element: Transaktionsdatensatz zum Nachweis der Kontrolle einer gesperrten oder ungultigen Applikation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXKNAWB

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Transaktionsdatensatz zum Nachweis der Kontrolle einer gesperrten oder ungultigen Berechtigung oder einer gueltigen statischen Berechtigung (z.B. Barcode)
Diagram	
Type	tns:TXKNAWB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXKNAWB_Type
Properties	content: complex
Model	txbase, tns:logTransaktionsOperator_ID, tns:logTerminal_ID, tns:logTransaktionsZeitpunkt, tns:logTransaktionsOrt_ID, tns:logValidationCode, tns:berBerechtigung_ID
Children	tns:berBerechtigung_ID, tns:logTerminal_ID, tns:logTransaktionsOperator_ID, tns:logTransaktionsOrt_ID, tns:logTransaktionsZeitpunkt, tns:logValidationCode, txbase
Instance	<pre><tns:TXKNAWB xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:logTransaktionsOperator_ID>{1,1}</tns:logTransaktionsOperator_ID> <tns:logTerminal_ID>{1,1}</tns:logTerminal_ID> <tns:logTransaktionsZeitpunkt>{1,1}</tns:logTransaktionsZeitpunkt> <tns:logTransaktionsOrt_ID>{1,1}</tns:logTransaktionsOrt_ID> <tns:logValidationCode>{1,1}</tns:logValidationCode> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> </tns:TXKNAWB></pre>
Source	<pre><xs:element name="TXKNAWB" type="tns:TXKNAWB_Type"> <xs:annotation> <xs:documentation>Element: Transaktionsdatensatz zum Nachweis der Kontrolle einer gesperrten oder ungultigen Berechtigung oder einer gueltigen statischen Berechtigung (z.B. Barcode)</ </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAMBER

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Ausgabe einer Multiberechtigung

Diagram	
Type	tns:TXAMBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type <ul style="list-style-type: none"> tns:TXABER_Type <ul style="list-style-type: none"> tns:TXAMBER_Type
Properties	content: complex
Model	txbase, tns:tx_ber, tns:berechtigungTarifbereich, tns:berechtigungTarifbereichZusatz{0,1}, tns:ausgabeTransaktionBerechtigung, tns:berNmTransaktionMAC, tns:tx_abkey
Children	tns:ausgabeTransaktionBerechtigung, tns:berNmTransaktionMAC, tns:berechtigungTarifbereich, tns:berechtigungTarifbereichZusatz, tns:tx_abkey, tns:tx_ber, txbase
Instance	<pre> <tns:TXAMBER xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:tx_ber>{1,1}</tns:tx_ber> <tns:berechtigungTarifbereich>{1,1}</tns:berechtigungTarifbereich> <tns:berechtigungTarifbereichZusatz>{0,1}</tns:berechtigungTarifbereichZusatz> <tns:ausgabeTransaktionBerechtigung>{1,1}</tns:ausgabeTransaktionBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> <tns:tx_abkey>{1,1}</tns:tx_abkey> </tns:TXAMBER> </pre>
Source	<pre> <xs:element name="TXAMBER" type="tns:TXAMBER_Type"> <xs:annotation> <xs:documentation>Element: Ausgabe einer Multiberechtigung</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXEMBER

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Erfassung einer Multiberechtigung
Diagram	<pre> classDiagram class TXEMBER_Type { txbase fahrttransaktion tx_abkey } class TXEMBER_Type { txbase fahrttransaktion tx_abkey } class TXEMBER_Type { txbase fahrttransaktion tx_abkey } TXEMBER_Type -- TXEMBER_Type : txbase TXEMBER_Type -- TXEMBER_Type : fahrttransaktion TXEMBER_Type -- TXEMBER_Type : tx_abkey </pre>

Type	tns:TXEMBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXEBER_Type tns:TXEMBER_Type
Properties	content: complex
Model	txbase , tns:fahrttransaktion , tns:berNmTransaktionMAC , tns:tx_abkey
Children	tns:berNmTransaktionMAC, tns:fahrttransaktion, tns:tx_abkey, txbase
Instance	<pre><tns:TXEMBER xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:fahrttransaktion>{1,1}</tns:fahrttransaktion> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> <tns:tx_abkey>{1,1}</tns:tx_abkey> </tns:TXEMBER></pre>
Source	<pre><xs:element name="TXEMBER" type="tns:TXEMBER_Type"> <xs:annotation> <xs:documentation>Element: Erfassung einer Multiberechtigung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXRMBER

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Ruecknahme einer Multiberechtigung
Diagram	
Type	tns:TXRMBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXRBER_Type tns:TXRMBER_Type
Properties	content: complex
Model	txbase , tns:ruecknahmeTransaktionBerechtigung , tns:berNmTransaktionMAC , tns:tx_abkey
Children	tns:berNmTransaktionMAC, tns:ruecknahmeTransaktionBerechtigung, tns:tx_abkey, txbase
Instance	<pre><tns:TXRMBER xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:ruecknahmeTransaktionBerechtigung>{1,1}</tns:ruecknahmeTransaktionBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> <tns:tx_abkey>{1,1}</tns:tx_abkey> </tns:TXRMBER></pre>
Source	<pre><xs:element name="TXRMBER" type="tns:TXRMBER_Type"> <xs:annotation> <xs:documentation>Element: Ruecknahme einer Multiberechtigung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type(s)

Complex Type tns:TXAEBER_Type_1_3_0

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Aenderung einer Berechtigung
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAEBER_Type_1_3_0
Used by	Element tns:TXAEBER_1_3_0
Model	txbase , tns:tx_ber , tns:berechtigungTarifbereichDaten , tns:berBerechtigung_ID , tns:prodProdukt_ID
Children	tns:berBerechtigung_ID, tns:berechtigungTarifbereichDaten, tns:prodProdukt_ID, tns:tx_ber, txbase
Source	<pre> <xs:complexType name="TXAEBER_Type_1_3_0"> <xs:annotation> <xs:documentation>Typ: Aenderung einer Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="tx_ber" type="ion:TX_BER_Type"/> <xs:element name="berechtigungTarifbereichDaten" type="xs:hexBinary"/> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/> <xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/ext/1.3.0/XML-Schema_KVP_DL_PV_ext-1.3.0.xsd

Complex Type tns:NmTransaktion_ID_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Datenstruktur Nm_Transaktion_ID
Diagram	
Used by	Element tns:AllgemeineTransaktionsdaten/tns:logNmTransaktion_ID
Model	tns:samSequenznummer , tns:SAM_ID.samNummer
Children	tns:SAM_ID.samNummer, tns:samSequenznummer
Source	<pre> <xs:complexType name="NmTransaktion_ID_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur Nm_Transaktion_ID</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="samSequenznummer" type="ct:SequenceNumberFour"/> <xs:element name="SAM_ID.samNummer" type="ion:SAM_ID_Type"/> </xs:sequence> </xs:complexType> </pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---

Complex Type tns:Mitnahme_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Datenstruktur Ort_ID
Diagram	
Used by	Elements tns:TX_AFBLOG_Type/tns:afbLogMitnahme, tns:TX_EFSLOG_Type/tns:efsLogMitnahme
Model	tns:mitnahmeTyp , tns:mitnahmeAnzahl
Children	tns:mitnahmeAnzahl, tns:mitnahmeTyp
Source	<pre><xs:complexType name="Mitnahme_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur Ort_ID</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="mitnahmeTyp" type="tns:Profil_CODE_Type"/> <xs:element name="mitnahmeAnzahl" type="ct:INT1"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:Linie_ID_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Die Linie_ID kennzeichnet eine Linie eindeutig im gesamten Geltungsbereich der Kernapplikation
Diagram	
Used by	Element tns:LinieVariante_ID_Type/tns:linie_ID
Model	tns:linienNummer , tns:linieDomaene_ID
Children	tns:linieDomaene_ID, tns:linienNummer
Source	<pre><xs:complexType name="Linie_ID_Type"> <xs:annotation> <xs:documentation>Typ: Die Linie_ID kennzeichnet eine Linie eindeutig im gesamten Geltungsbereich der Kernapplikation</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="linienNummer" type="ct:ReferenceNumberTwo"/> <xs:element name="linieDomaene_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:LinieVariante_ID_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Die LinieVariante_ID kennzeichnet eine Linienvariante eindeutig im gesamten Geltungsbereich der Kernapplikation
Diagram	
Used by	Element tns:TX_BERLOG_Type/tns:berLogLinieVariante_ID
Model	tns:variantenNummer , tns:linie_ID
Children	tns:linie_ID, tns:variantenNummer

Source	<pre><xs:complexType name="LinieVariante_ID_Type"> <xs:annotation> <xs:documentation>Typ: Die LinieVariante_ID kennzeichnet eine Linienvariante eindeutig im gesamten Geltungsbereich der Kernapplikation</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="variantenNummer" type="ct:ReferenceNumberOne"/> <xs:element name="linie_ID" type="tns:Linie_ID_Type"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:Fahrt_ID_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Die Fahrt_ID kennzeichnet eine Fahrt eindeutig im gesamten Geltungsbereich der Kernapplikation
Diagram	<pre> classDiagram class Fahrt_ID_Type { fahrtNummer fahrtBetreiber_ID } class fahrtNummer class fahrtBetreiber_ID Fahrt_ID_Type --> fahrtNummer Fahrt_ID_Type --> fahrtBetreiber_ID </pre>
Used by	Element tns:TX_BERLOG_Type/tns:berLogFahrt_ID
Model	tns:fahrtNummer, tns:fahrtBetreiber_ID
Children	tns:fahrtBetreiber_ID, tns:fahrtNummer
Source	<pre><xs:complexType name="Fahrt_ID_Type"> <xs:annotation> <xs:documentation>Typ: Die Fahrt_ID kennzeichnet eine Fahrt eindeutig im gesamten Geltungsbereich der Kernapplikation</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="fahrtNummer" type="ct:ReferenceNumberThree"/> <xs:element name="fahrtBetreiber_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:EFSViaOrtsListe_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Liste der Orte, die bei einer Fahrt durchfahren werden
Diagram	<pre> classDiagram class EFSViaOrtsListe_Type { efsViaort_ID } class efsViaort_ID EFSViaOrtsListe_Type --> efsViaort_ID </pre>
Used by	Element tns:TX_EFSLOG_Type/tns:efsViaOrte_IDs
Model	tns:efsViaort_ID {0,3}
Children	tns:efsViaort_ID
Source	<pre><xs:complexType name="EFSViaOrtsListe_Type"> <xs:annotation> <xs:documentation>Typ: Liste der Orte, die bei einer Fahrt durchfahren werden</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="efsViaort_ID" type="ion:Ort_ID_Type" minOccurs="0" maxOccurs="3"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TX_PP_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Basisdaten fuer Preise
Diagram	<pre> classDiagram class TX_PP_Type { ppLeistungsPreis ppMehrwertsteuer } class ppLeistungsPreis class ppMehrwertsteuer TX_PP_Type --> ppLeistungsPreis TX_PP_Type --> ppMehrwertsteuer </pre>

Used by	Elements tns:TXANLN_Type/tns:txpp, tns:TXAUSEFS_Type/tns:txpp, tns:TXBEKODL_Type/tns:txpp
Model	tns:ppLeistungsPreis , tns:ppMehrwertsteuer
Children	tns:ppLeistungsPreis, tns:ppMehrwertsteuer
Source	<pre><xs:complexType name="TX_PP_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Preise</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="ppLeistungsPreis" type="tns:Amount65535"/> <xs:element name="ppMehrwertsteuer" type="ct:INT2"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TX_BERLOG_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ:Basisdatensatz zur Anzeige von Log-Informationen einer Berechtigung
Diagram	
Used by	Elements tns:TX_AFBLOG_Type/tns:txberlog, tns:TX_EFSLOG_Type/tns:txberlog
Model	tns:berLogLinieVariante_ID , tns:berLogFahrt_ID
Children	tns:berLogFahrt_ID, tns:berLogLinieVariante_ID
Source	<pre><xs:complexType name="TX_BERLOG_Type"> <xs:annotation> <xs:documentation>Typ:Basisdatensatz zur Anzeige von Log-Informationen einer Berechtigung</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berLogLinieVariante_ID" type="tns:LinieVariante_ID_Type"/> <xs:element name="berLogFahrt_ID" type="tns:Fahrt_ID_Type"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TX_LOG_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ:Basisdatensatz zur Anzeige von Log-Informationen einer Transaktion
Diagram	
Used by	Elements tns:TX_AFBLOG_Type/tns:txlog, tns:TX_EFSLOG_Type/tns:txlog
Model	tns:logTransaktionsoperator_ID , tns:logTransaktionsZeitpunkt_ID , tns:logTransaktionsort_ID , tns:logTransaktionsTyp_ID
Children	tns:logTransaktionsTyp_ID, tns:logTransaktionsZeitpunkt_ID, tns:logTransaktionsoperator_ID, tns:logTransaktionsort_ID
Source	<pre><xs:complexType name="TX_LOG_Type"> <xs:annotation> <xs:documentation>Typ:Basisdatensatz zur Anzeige von Log-Informationen einer Transaktion</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="logTransaktionsoperator_ID" type="ka:Organisation_ID"/> <xs:element name="logTransaktionsZeitpunkt_ID" type="ct:DateTimeCompact"/> <xs:element name="logTransaktionsort_ID" type="ion:Ort_ID_Type"/> <xs:element name="logTransaktionsTyp_ID" type="ion:NmTransaktionsTyp_CODE"/> </xs:sequence> </xs:complexType></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---

Complex Type tns:TX_AFBLOG_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ:Basisdatensatz zur Anzeige von Log-Informationen einer AFB
Diagram	
Used by	Element tns:TXANLN_Type/tns:txafblog
Model	tns:afbLogFahrgastTyp, tns:afbLogVerkehrsmittelart, tns:afbLogServiceKlasse, tns:afbLogDynamischerRabattParameter, tns:afbLogMitnahme+, tns:txberlog, tns:txlog
Children	tns:afbLogDynamischerRabattParameter, tns:afbLogFahrgastTyp, tns:afbLogMitnahme, tns:afbLogServiceKlasse, tns:afbLogVerkehrsmittelart, tns:txberlog, tns:txlog
Source	<pre> <xs:complexType name="TX_AFBLOG_Type"> <xs:annotation> <xs:documentation>Typ:Basisdatensatz zur Anzeige von Log-Informationen einer AFB</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="afbLogFahrgastTyp" type="tns:Kundentyp_CODE_Type"/> <xs:element name="afbLogVerkehrsmittelart" type="tns:Transportserviceart_CODE_Type"/> <xs:element name="afbLogServiceKlasse" type="tns:ServiceKlasse_CODE_Type"/> <xs:element name="afbLogDynamischerRabattParameter" type="ct:OctetString4"/> <!-- SST 1107 "List of: Mitnahme" 6.5 Tabelle 6-87 --> <xs:element name="afbLogMitnahme" type="tns:Mitnahme_Type" minOccurs="1" maxOccurs="unbounded"/> <xs:element name="txberlog" type="tns:TX_BERLOG_Type"/> <xs:element name="txlog" type="tns:TX_LOG_Type"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TX_EFSLOG_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ:Basisdatensatz zur Anzeige von Log-Informationen eines EFS
Diagram	
Used by	Element tns:TXAUSEFS_Type/tns:txefslog

Model	tns:efsFahrgastTyp, tns:efsVerkehrsmittelKategorie, tns:efsLogServiceKlasse, tns:efsServiceKlasseExtra, tns:efsStartort_ID, tns:efsZielort_ID, tns:efsViaOrte_IDs, tns:efsLogMitnahme+, tns:txberlog, tns:txlog
Children	tns:efsFahrgastTyp, tns:efsLogMitnahme, tns:efsLogServiceKlasse, tns:efsServiceKlasseExtra, tns:efsStartort_ID, tns:efsVerkehrsmittelKategorie, tns:efsViaOrte_IDs, tns:efsZielort_ID, tns:txberlog, tns:txlog
Source	<pre> <xs:complexType name="TX_EFSLOG_Type"> <xs:annotation> <xs:documentation>Typ:Basisdatensatz zur Anzeige von Log-Informationen eines EFS</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="efsFahrgastTyp" type="tns:Kundentyp_CODE_Type" /> <xs:element name="efsVerkehrsmittelKategorie" type="tns:TransportmittelKategorie_CODE_Type" /> <xs:element name="efsLogServiceKlasse" type="tns:ServiceKlasse_CODE_Type" /> <xs:element name="efsServiceKlasseExtra" type="tns:ServiceKlasseExtra_CODE_Type" /> <xs:element name="efsStartort_ID" type="ion:Ort_ID_Type" /> <xs:element name="efsZielort_ID" type="ion:Ort_ID_Type" /> <xs:element name="efsViaOrte_IDs" type="tns:EFSSViaOrtsListe_Type" /> <!-- SST 1107 "List of: Mitnahme" 6.5 Tabelle 6-87 --> <xs:element name="efsLogMitnahme" type="tns:Mitnahme_Type" minOccurs="1" maxOccurs="unbounded" /> <xs:element name="txberlog" type="tns:TX_BERLOG_Type" /> <xs:element name="txlog" type="tns:TX_LOG_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TX_ABKEY_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Ableitungsdaten fuer eine Multiberechtigung
Diagram	
Used by	Elements tns:TXAMBER_Type/tns:tx_abkey, tns:TXEMBER_Type/tns:tx_abkey, tns:TXRM-BER_Type/tns:tx_abkey
Model	tns:berAbleitungsdaten
Children	tns:berAbleitungsdaten
Source	<pre> <xs:complexType name="TX_ABKEY_Type"> <xs:annotation> <xs:documentation>Typ: Ableitungsdaten fuer eine Multiberechtigung</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berAbleitungsdaten" type="ct:OctetString10" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXASBER_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ:Anzeige Leistungsnachweise einer Berechtigung
Diagram	
Type	extension of tns:TXAS_Type

Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXAS_Type • tns:TXASBER_Type
Used by	Elements tns:TXASBERAFB, tns:TXASBEREFS
Model	txbase , transSendeAuftrag , transSendeAuftragstyp , tns:prodProdukt_ID , tns:berBerechtigung_ID , tns:transSelektionKriterien
Children	tns:berBerechtigung_ID , tns:prodProdukt_ID , tns:transSelektionKriterien , transSendeAuftrag , transSendeAuftragstyp , txbase
Source	<pre> <xs:complexType name="TXASBER_Type"> <xs:annotation> <xs:documentation>Typ:Anzeige Leistungsnachweise einer Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TXAS_Type"> <xs:sequence> <xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type"/> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/> <xs:element name="transSelektionKriterien" type="tns:SelektionKriterien_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXANLN_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ:Anzeige Leistungsnachweise einer Berechtigung
Diagram	<pre> classDiagram class ionTX_BASE_Type["ion:TX_BASE_Type (extension base)"] class TXANLN_Type class txbase class prodAbrechnungsVerfahren class berBezahlArt class prodProdukt_ID class berBerechtigung_ID class transSelektionKriterien class txpp class txafblog["1..∞ txafblog"] ionTX_BASE_Type --> TXANLN_Type ionTX_BASE_Type --> txbase TXANLN_Type --> prodAbrechnungsVerfahren TXANLN_Type --> berBezahlArt TXANLN_Type --> prodProdukt_ID TXANLN_Type --> berBerechtigung_ID TXANLN_Type --> transSelektionKriterien TXANLN_Type --> txpp TXANLN_Type --> txafblog </pre>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXANLN_Type
Used by	Element tns:TXANLN
Model	txbase , tns:prodAbrechnungsVerfahren , tns:berBezahlArt , tns:prodProdukt_ID , tns:berBerechtigung_ID , tns:transSelektionKriterien , tns:txpp , tns:txafblog+
Children	tns:berBerechtigung_ID , tns:berBezahlArt , tns:prodAbrechnungsVerfahren , tns:prodProdukt_ID , tns:transSelektionKriterien , tns:txafblog , tns:txpp , txbase
Source	<pre> <xs:complexType name="TXANLN_Type"> <xs:annotation> <xs:documentation>Typ:Anzeige Leistungsnachweise einer Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="prodAbrechnungsVerfahren" type="ion:Abrechnungsverfahren_CODE_Type"/> <xs:element name="berBezahlArt" type="ion:Bezahlart_CODE_Type"/> <xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type"/> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/> <xs:element name="transSelektionKriterien" type="tns:SelektionKriterien_Type"/> <xs:element name="txpp" type="tns:TX_PP_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>

	<pre> <xs:element name="txafbolog" type="tns:TX_AFBLOG_Type" minOccurs="1" maxOccurs="unbounded" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXAUSEFS_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ:Stellt dem kontofuehrenden KVP alle zu einer EFS-Berechtigung bei einem PV erfassten Daten zur Anzeige fuer Servicezwecke zur Verfuegung
Diagram	<pre> classDiagram class TXAUSEFS_Type class ion_TX_BASE_Type["ion:TX_BASE_Type (extension base)"] class txbase class prodAbrechnungsVerfahren class berBezahlMittel class berBezahlArt class prodProdukt_ID class berBerechtigung_ID class transSelektionKriterien class txpp class txefslog TXAUSEFS_Type --> ion_TX_BASE_Type : extension base TXAUSEFS_Type --> txbase TXAUSEFS_Type --> prodAbrechnungsVerfahren TXAUSEFS_Type --> berBezahlMittel TXAUSEFS_Type --> berBezahlArt TXAUSEFS_Type --> prodProdukt_ID TXAUSEFS_Type --> berBerechtigung_ID TXAUSEFS_Type --> transSelektionKriterien TXAUSEFS_Type --> txpp TXAUSEFS_Type --> txefslog : 1..∞ </pre>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAUSEFS_Type
Used by	Element tns:TXAUSEFS
Model	txbase , tns:prodAbrechnungsVerfahren , tns:berBezahlMittel , tns:berBezahlArt , tns:prodProdukt_ID , tns:berBerechtigung_ID , tns:transSelektionKriterien , tns:txpp , tns:txefslog+
Children	tns:berBerechtigung_ID, tns:berBezahlArt, tns:berBezahlMittel, tns:prodAbrechnungsVerfahren, tns:prodProdukt_ID, tns:transSelektionKriterien, tns:txefslog, tns:txpp, txbase
Source	<pre> <xs:complexType name="TXAUSEFS_Type"> <xs:annotation> <xs:documentation>Typ:Stellt dem kontofuehrenden KVP alle zu einer EFS-Berechtigung bei einem PV erfassten Daten zur Anzeige fuer Servicezwecke zur Verfuegung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="prodAbrechnungsVerfahren" type="ion:Abrechnungsverfahren_CODE_Type" /> <xs:element name="berBezahlMittel" type="ct:OctetString10" /> <xs:element name="berBezahlArt" type="ion:Bezahlart_CODE_Type" /> <xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type" /> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type" /> <xs:element name="transSelektionKriterien" type="tns:SelektionKriterien_Type" /> <xs:element name="txpp" type="tns:TX_PP_Type" /> <xs:element name="txefslog" type="tns:TX_EFSLOG_Type" minOccurs="1" maxOccurs="unbounded" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXADM_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Annotations	Typ: Antwort auf Anfrage wegen Defektem Medium
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXADM_Type
Used by	Element tns:TXADM
Model	txbase , tns:transMediennummer , tns:transappInstanz_ID
Children	tns:transMediennummer, tns:transappInstanz_ID, txbase
Source	<pre> <xs:complexType name="TXADM_Type"> <xs:annotation> <xs:documentation>Typ: Antwort auf Anfrage wegen Defektem Medium</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="transMediennummer" type="ct:OctetString10"/> <xs:element name="transappInstanz_ID" type="ion:NmApplikationInstanz_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXABER_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Ausgabe einer Berechtigung
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXABER_Type
Used by	Complex Type tns:TXAMBER_Type Element tns:TXABER
Model	txbase , tns:tx_ber , tns:berechtigungTarifbereich , tns:berechtigungTarifbereichZusatz{0,1} , tns:ausgabeTransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:ausgabeTransaktionBerechtigung, tns:berNmTransaktionMAC, tns:berechtigungTarifbereich, tns:berechtigungTarifbereichZusatz, tns:tx_ber, txbase
Source	<pre> <xs:complexType name="TXABER_Type"> <xs:annotation> <xs:documentation>Typ: Ausgabe einer Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> </pre>

	<pre> <xs:sequence> <xs:element name="tx_ber" type="ion:TX_BER_Type"/> <xs:element name="berechtigungTarifbereich" type="xs:hexBinary"/> <!-- Wegen TXABER in TXANTWORT in PE-Spez ist dieses Element optional --> <xs:element name="berechtigungTarifbereichZusatz" type="xs:hexBinary" minOccurs="0"/> <xs:element name="ausgabeTransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type"/> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXEBER_Type

Namespace	http://vdv/ka/kvp-dl-pv/2				
Annotations	Typ: Erfassung einer Berechtigungstransaktion				
Diagram					
Type	extension of tns:TX_BASE_Type				
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXEBER_Type 				
Used by	<table> <tr> <td>Complex Type</td><td>tns:TXEMBER_Type</td></tr> <tr> <td>Element</td><td>tns:TXEBER</td></tr> </table>	Complex Type	tns:TXEMBER_Type	Element	tns:TXEBER
Complex Type	tns:TXEMBER_Type				
Element	tns:TXEBER				
Model	txbase , tns:fahrttransaktion , tns:berNmTransaktionMAC				
Children	tns:berNmTransaktionMAC, tns:fahrttransaktion, txbase				
Source	<pre> <xs:complexType name="TXEBER_Type"> <xs:annotation> <xs:documentation>Typ: Erfassung einer Berechtigungstransaktion</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="fahrttransaktion" type="ion:Transaktionsdatensatz_Type"/> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Complex Type tns:TXAEBER_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Aenderung einer Berechtigung
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAEBER_Type

Used by	Element tns:TXAEBER
Model	txbase , tns:tx_ber , tns:berechtigungTarifbereich
Children	tns:berechtigungTarifbereich, tns:tx_ber, txbase
Source	<pre> <xs:complexType name="TXAEBER_Type"> <xs:annotation> <xs:documentation>Typ: Aenderung einer Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="tx_ber" type="ion:TX_BER_Type"/> <xs:element name="berechtigungTarifbereich" type="xs:hexBinary"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXAENBER_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Aenderung der Nutzertarifparameter einer Berechtigung
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAENBER_Type
Used by	Element tns:TXAENBER
Model	txbase , tns:fahrttransaktion , tns:berNmTransaktionMAC
Children	tns:berNmTransaktionMAC, tns:fahrttransaktion, txbase
Source	<pre> <xs:complexType name="TXAENBER_Type"> <xs:annotation> <xs:documentation>Typ: Aenderung der Nutzertarifparameter einer Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="fahrttransaktion" type="ion:Transaktionsdatensatz_Type"/> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXRBER_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Ruecknahme einer Berechtigung
Diagram	

Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXRBER_Type
Used by	<div>Complex Type tns:TXRMBER_Type</div> <div>Element tns:TXRBER</div>
Model	txbase , tns:ruecknahmeTransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:berNmTransaktionMAC, tns:ruecknahmeTransaktionBerechtigung, txbase
Source	<pre> <xs:complexType name="TXRBER_Type"> <xs:annotation> <xs:documentation>Typ: Ruecknahme einer Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="ruecknahmeTransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type"/> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXAMBER_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Ausgabemeldung einer Multiberechtigung
Diagram	
Type	extension of tns:TXABER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXABER_Type tns:TXAMBER_Type
Used by	Element tns:TXAMBER
Model	txbase , tns:tx_ber , tns:berechtigungTarifbereich , tns:berechtigungTarifbereichZusatz{0,1} , tns:ausgabeTransaktionBerechtigung , tns:berNmTransaktionMAC , tns:tx_abkey
Children	tns:ausgabeTransaktionBerechtigung, tns:berNmTransaktionMAC, tns:berechtigungTarifbereich, tns:berechtigungTarifbereichZusatz, tns:tx_abkey, tns:tx_ber, txbase
Source	<pre> <xs:complexType name="TXAMBER_Type"> <xs:annotation> <xs:documentation>Typ: Ausgabemeldung einer Multiberechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXABER_Type"> <xs:sequence> <xs:element name="tx_abkey" type="tns:TX_ABKEY_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>

	<code></xs:complexContent></code> <code></xs:complexType></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type **tns:TXEMBER_Type**

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Erfassung einer Multiberechtigung
Diagram	
Type	extension of tns:TXEBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXEBER_Type tns:TXEMBER_Type
Used by	Element tns:TXEMBER
Model	txbase , tns:fahrttransaktion , tns:berNmTransaktionMAC , tns:tx_abkey
Children	tns:berNmTransaktionMAC, tns:fahrttransaktion, tns:tx_abkey, txbase
Source	<pre> <xs:complexType name="TXEMBER_Type"> <xs:annotation> <xs:documentation>Typ: Erfassung einer Multiberechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXEBER_Type"> <xs:sequence> <xs:element name="tx_abkey" type="tns:TX_ABKEY_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type **tns:TXRMBER_Type**

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Ruecknahme einer Multiberechtigung
Diagram	
Type	extension of tns:TXRBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type

	<ul style="list-style-type: none"> • tns:TXRBER_Type • tns:TXRMBER_Type
Used by	Element tns:TXRMBER
Model	txbase , tns:ruecknahmeTransaktionBerechtigung , tns:berNmTransaktionMAC , tns:tx_abkey
Children	tns:berNmTransaktionMAC, tns:ruecknahmeTransaktionBerechtigung, tns:tx_abkey, txbase
Source	<pre><xs:complexType name="TXRMBER_Type"> <xs:annotation> <xs:documentation>Typ: Ruecknahme einer Multiberechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXRBER_Type"> <xs:sequence> <xs:element name="tx_abkey" type="tns:TX_ABKEY_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXASKON_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Anforderung eines neuen Kontingentes fuer einen PV-Schluessel im SAM
Diagram	<pre> classDiagram class ionTXAS_Type["ion:TXAS_Type (extension base)"] class tnsTX_BASE_Type["tns:TX_BASE_Type (extension base)"] class tnsTXASKON_Type["tns:TXASKON_Type"] class txbase class transSendeAuftrag class transSendeAuftragstyp class samSAM_ID class samSchluessel_ID class samLoadKeyZaehler class samNutzungsLimitNeu ionTXAS_Type -- > tnsTX_BASE_Type tnsTXASKON_Type -- > ionTXAS_Type tnsTX_BASE_Type -- txbase tnsTXASKON_Type -- transSendeAuftrag tnsTXASKON_Type -- transSendeAuftragstyp tnsTXASKON_Type -- samSAM_ID tnsTXASKON_Type -- samSchluessel_ID tnsTXASKON_Type -- samLoadKeyZaehler tnsTXASKON_Type -- samNutzungsLimitNeu </pre>
Type	extension of tns:TXAS_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXAS_Type • tns:TXASKON_Type
Used by	Element tns:TXASKON
Model	txbase , transSendeAuftrag , transSendeAuftragstyp , tns:samSAM_ID , tns:samSchluessel_ID , tns:samLoadKeyZaehler , tns:samNutzungsLimitNeu
Children	tns:samLoadKeyZaehler, tns:samNutzungsLimitNeu, tns:samSAM_ID, tns:samSchluessel_ID, transSendeAuftrag, transSendeAuftragstyp, txbase
Source	<pre><xs:complexType name="TXASKON_Type"> <xs:annotation> <xs:documentation>Typ: Anforderung eines neuen Kontingentes fuer einen PV-Schluessel im SAM</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TXAS_Type"> <xs:sequence> <xs:element name="samSAM_ID" type="ion:SAM_ID_Type" /> <xs:element name="samSchluessel_ID" type="ion:SymSchluessel_ID_Type" /> <xs:element name="samLoadKeyZaehler" type="ct:INT4" /> <xs:element name="samNutzungsLimitNeu" type="ct:INT4" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>

	<pre> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXUEBERKON_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Genehmigung eines neuen Kontingentes fuer einen PV-Schlüssel im SAM
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXUEBERKON_Type
Used by	Element tns:TXUEBERKON
Model	txbase , tns:samSAM_ID , tns:samSchlüssel_ID , tns:samLoadKeyZaehler , tns:samNutzungsLimitGen
Children	tns:samLoadKeyZaehler, tns:samNutzungsLimitGen, tns:samSAM_ID, tns:samSchlüssel_ID, txbase
Source	<pre> <xs:complexType name="TXUEBERKON_Type"> <xs:annotation> <xs:documentation>Typ: Genehmigung eines neuen Kontingentes fuer einen PV-Schlüssel im SAM</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="samSAM_ID" type="ion:SAM_ID_Type"/> <xs:element name="samSchlüssel_ID" type="ion:SymSchlüssel_ID_Type"/> <xs:element name="samLoadKeyZaehler" type="ct:INT4"/> <xs:element name="samNutzungsLimitGen" type="ct:INT4"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXBEKODL_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Transaktionsdatensatz (vom PV an den KVP) fuer eine Belastung des Kundenkontos nach Berechnung des Leistungspreises beim PV (aufgrund uebermittelter Fahrttransaktionen vom DL).
Diagram	

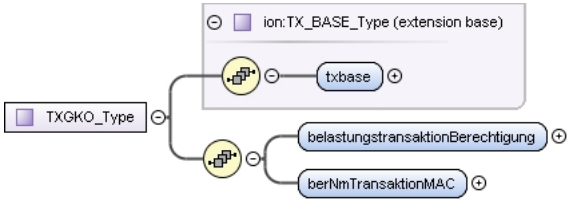
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXBEKODL_Type
Used by	Element tns:TXBEKODL
Model	txbase , tns:berBerechtigung_ID , tns:txpp , tns:fahrttransaktion+ , tns:berNmTransaktionMAC
Children	tns:berBerechtigung_ID, tns:berNmTransaktionMAC, tns:fahrttransaktion, tns:txpp, txbase
Source	<pre> <xs:complexType name="TXBEKODL_Type"> <xs:annotation> <xs:documentation>Typ: Transaktionsdatensatz (vom PV an den KVP) fuer eine Belastung des Kundenkontos nach Berechnung des Leistungspreises beim PV (aufgrund uebermittelter Fahrttransaktionen vom DL).</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type" /> <xs:element name="txpp" type="tns:TX_PP_Type" /> <xs:element name="fahrttransaktion" type="ion:Transaktionsdatensatz_Type" maxOccurs="unbounded" /> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXBEWEBKOKVP_Type

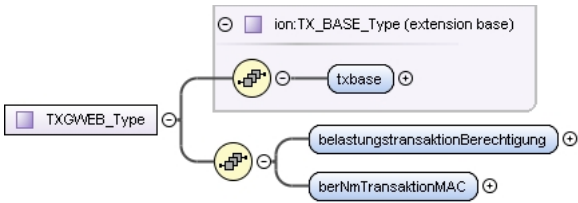
Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Gemeinsamer Typ: Belastung POB/PEB/WEB
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXBEWEBKOKVP_Type
Used by	Elements tns:TXBEKOKVP, tns:TXBEWEBKVP
Model	txbase , tns:belastungstransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:belastungstransaktionBerechtigung, tns:berNmTransaktionMAC, txbase
Source	<pre> <xs:complexType name="TXBEWEBKOKVP_Type"> <xs:annotation> <xs:documentation>Gemeinsamer Typ: Belastung POB/PEB/WEB</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="belastungstransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type" /> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXGKO_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Gutschrift POB/PEB

Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXGKO_Type
Used by	Element tns:TXGKO
Model	txbase , tns:belastungstransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:belastungstransaktionBerechtigung, tns:berNmTransaktionMAC, txbase
Source	<pre> <xs:complexType name="TXGKO_Type"> <xs:annotation> <xs:documentation>Typ: Gutschrift POB/PEB</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="belastungstransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type" /> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXGWEB_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Gutschrift WEB
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXGWEB_Type
Used by	Element tns:TXGWEB
Model	txbase , tns:belastungstransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:belastungstransaktionBerechtigung, tns:berNmTransaktionMAC, txbase
Source	<pre> <xs:complexType name="TXGWEB_Type"> <xs:annotation> <xs:documentation>Typ: Gutschrift WEB</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="belastungstransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type" /> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXKNAWA_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Transaktionsdatensatz zum Nachweis der Kontrolle einer gesperrten oder ungueltigen Applikation
Diagram	<pre> classDiagram class TXKNAWA_Type { txbase logTransaktionsOperator_ID logTerminal_ID logTransaktionsZeitpunkt logTransaktionsOrt_ID logValidationCode applInstanz_ID } class TX_BASE_Type { txbase } TXKNAWA_Type -- > TX_BASE_Type TXKNAWA_Type -- txbase TXKNAWA_Type -- logTransaktionsOperator_ID TXKNAWA_Type -- logTerminal_ID TXKNAWA_Type -- logTransaktionsZeitpunkt TXKNAWA_Type -- logTransaktionsOrt_ID TXKNAWA_Type -- logValidationCode TXKNAWA_Type -- applInstanz_ID </pre>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXKNAWA_Type
Used by	Element tns:TXKNAWA
Model	txbase , tns:logTransaktionsOperator_ID , tns:logTerminal_ID , tns:logTransaktionsZeitpunkt , tns:logTransaktionsOrt_ID , tns:log-ValidationCode , tns:applInstanz_ID
Children	tns:applInstanz_ID, tns:logTerminal_ID, tns:logTransaktionsOperator_ID, tns:logTransaktionsOrt_ID, tns:logTransaktionsZeitpunkt, tns:logValidationCode, txbase
Source	<pre> <xs:complexType name="TXKNAWA_Type"> <xs:annotation> <xs:documentation>Typ: Transaktionsdatensatz zum Nachweis der Kontrolle einer gesperrten oder ungueltigen Applikation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="logTransaktionsOperator_ID" type="ct:ReferenceNumberTwo"/> <xs:element name="logTerminal_ID" type="ion:Terminal_ID_Type"/> <xs:element name="logTransaktionsZeitpunkt" type="ct:DateTimeCompact"/> <xs:element name="logTransaktionsOrt_ID" type="ion:Ort_ID_Type"/> <xs:element name="logValidationCode" type="tns:Validation_CODE_Type"/> <xs:element name="applInstanz_ID" type="ion:NmApplikationInstanz_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXKNAWB_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Transaktionsdatensatz zum Nachweis der Kontrolle einer gesperrten oder ungueltigen Berechtigung oder einer gueltigen statischen Berechtigung (z.B. Barcode)

Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXKNAWB_Type
Used by	Element tns:TXKNAWB
Model	txbase , tns:logTransaktionsOperator_ID , tns:logTerminal_ID , tns:logTransaktionsZeitpunkt , tns:logTransaktionsOrt_ID , tns:logValidationCode , tns:berBerechtigung_ID
Children	tns:berBerechtigung_ID, tns:logTerminal_ID, tns:logTransaktionsOperator_ID, tns:logTransaktionsOrt_ID, tns:logTransaktionsZeitpunkt, tns:logValidationCode, txbase
Source	<pre> <xs:complexType name="TXKNAWB_Type"> <xs:annotation> <xs:documentation>Typ: Transaktionsdatensatz zum Nachweis der Kontrolle einer gesperrten oder ungultigen Berechtigung oder einer gueltigen statischen Berechtigung (z.B. Barcode)</ xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="logTransaktionsOperator_ID" type="ct:ReferenceNumberTwo"/> <xs:element name="logTerminal_ID" type="ion:Terminal_ID_Type"/> <xs:element name="logTransaktionsZeitpunkt" type="ct:DateTimeCompact"/> <xs:element name="logTransaktionsOrt_ID" type="ion:Ort_ID_Type"/> <xs:element name="logValidationCode" type="tns:Validation_CODE_Type"/> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXLPEB_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Laden eines PEB-Kontos
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXLPEB_Type
Used by	Element tns:TXLPEB
Model	txbase , tns:ezahlungsbelegBerechtigung , tns:berNmTransaktionMAC
Children	tns:berNmTransaktionMAC, tns:ezahlungsbelegBerechtigung, txbase
Source	<pre> <xs:complexType name="TXLPEB_Type"> </pre>

	<pre> <xs:annotation> <xs:documentation>Typ: Laden eines PEB-Kontos</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="einzahlungsbelegBerechtigung" type="ion:Transaktionsdatensatz_Type" /> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSANFB_Type

Namespace	http://vdv/ka/kvp-dl-pv/2				
Annotations	Typ: Sperranforderung fuer eine Berechtigung				
Diagram					
Type	extension of tns:TX_SANF_Type				
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFB_Type 				
Used by	<table> <tr> <td>Complex Type</td><td>tns:TXSAANFB_Type</td></tr> <tr> <td>Element</td><td>tns:TXSANFB</td></tr> </table>	Complex Type	tns:TXSAANFB_Type	Element	tns:TXSANFB
Complex Type	tns:TXSAANFB_Type				
Element	tns:TXSANFB				
Model	txbase , sperrSperrgrund , tns:berBerechtigung_ID , tns:prodProdukt_ID				
Children	sperrSperrgrund, tns:berBerechtigung_ID, tns:prodProdukt_ID, txbase				
Source	<pre> <xs:complexType name="TXSANFB_Type"> <xs:annotation> <xs:documentation>Typ: Sperranforderung fuer eine Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SANF_Type"> <xs:sequence> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type" /> <xs:element name="prodProdukt_ID" type="ion:EFMPProdukt_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Complex Type tns:TXSANFA_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Sperranforderung fuer eine Applikation

Diagram					
Type	extension of tns:TX_SANF_Type				
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SANF_Type • tns:TXSANFA_Type 				
Used by	<table> <tr> <td>Complex Type</td><td>tns:TXSAANFA_Type</td></tr> <tr> <td>Element</td><td>tns:TXSANFA</td></tr> </table>	Complex Type	tns:TXSAANFA_Type	Element	tns:TXSANFA
Complex Type	tns:TXSAANFA_Type				
Element	tns:TXSANFA				
Model	txbase , sperrSperrgrund , tns:applInstanz_ID				
Children	sperrSperrgrund, tns:applInstanz_ID, txbase				
Source	<pre> <xs:complexType name="TXSANFA_Type"> <xs:annotation> <xs:documentation>Typ: Sperranforderung fuer eine Applikation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SANF_Type"> <xs:sequence> <xs:element name="applInstanz_ID" type="ion:NmApplikationInstanz_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Complex Type tns:TXSAANFA_Type

Namespace	http://vdv/ka/kvp-dl-pv/2		
Annotations	Typ: Sperraufhebungsanforderung fuer eine Applikation		
Diagram			
Type	extension of tns:TXSANFA_Type		
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SANF_Type • tns:TXSANFA_Type • tns:TXSAANFA_Type 		
Used by	<table> <tr> <td>Element</td><td>tns:TXSAANFA</td></tr> </table>	Element	tns:TXSAANFA
Element	tns:TXSAANFA		
Model	txbase , sperrSperrgrund , tns:applInstanz_ID		
Children	sperrSperrgrund, tns:applInstanz_ID, txbase		
Source	<pre> <xs:complexType name="TXSAANFA_Type"> </pre>		

	<pre> <xs:annotation> <xs:documentation>Typ: Sperraufhebungsanforderung fuer eine Applikation</xs:documentation> </xs:annotation> <xs:complexType> <xs:extension base="tns:TXSANFA_Type" /> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSAANFB_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Sperraufhebungsanforderung fuer eine Berechtigung
Diagram	
Type	extension of tns:TXSANFB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFB_Type tns:TXSAANFB_Type
Used by	Element tns:TXSAANFB
Model	txbase , sperrSperrgrund , tns:berBerechtigung_ID , tns:prodProdukt_ID
Children	sperrSperrgrund, tns:berBerechtigung_ID, tns:prodProdukt_ID, txbase
Source	<pre> <xs:complexType name="TXSAANFB_Type"> <xs:annotation> <xs:documentation>Typ: Sperraufhebungsanforderung fuer eine Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXSANFB_Type" /> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSMITB_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Sperrmitteilung Berechtigung
Diagram	

Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITB_Type
Used by	Element tns:TXSMITB
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:berSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:berSperrkandidat, txbase
Source	<pre><xs:complexType name="TXSMITB_Type"> <xs:annotation> <xs:documentation>Typ: Sperrmitteilung Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SMIT_Type"> <xs:sequence> <xs:element name="berSperrkandidat" type="ion:Berechtigung_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSMITO_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Sperrmitteilung Organisation
Diagram	
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITO_Type
Used by	Element tns:TXSMITO
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:orgSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:orgSperrkandidat, txbase
Source	<pre><xs:complexType name="TXSMITO_Type"> <xs:annotation> <xs:documentation>Typ: Sperrmitteilung Organisation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SMIT_Type"> <xs:sequence> <xs:element name="orgSperrkandidat" type="ka:Organisation_ID"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSMITS_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Annotations	Typ: Sperrmitteilung SAM
Diagram	
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITS_Type
Used by	Element tns:TXSMITS
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:samSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:samSperrkandidat, txbase
Source	<pre> <xs:complexType name="TXSMITS_Type"> <xs:annotation> <xs:documentation>Typ: Sperrmitteilung SAM</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SMIT_Type"> <xs:sequence> <xs:element name="samSperrkandidat" type="ion:SAM_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSFREIMITB_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Sperrfreigabemitteilung Berechtigung
Diagram	
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITB_Type
Used by	Element tns:TXSFREIMITB
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:berSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:berSperrkandidat, txbase
Source	<pre> <xs:complexType name="TXSFREIMITB_Type"> <xs:annotation> </pre>

	<pre> <xs:documentation>Typ: Sperrfreigabemitteilung Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SMIT_Type"> <xs:sequence> <xs:element name="berSperrkandidat" type="ion:Berechtigung_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSFREIMITO_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Sperrfreigabemitteilung Organisation
Diagram	
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITO_Type
Used by	Element tns:TXSFREIMITO
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:orgSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:orgSperrkandidat, txbase
Source	<pre> <xs:complexType name="TXSFREIMITO_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung Organisation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SMIT_Type"> <xs:sequence> <xs:element name="orgSperrkandidat" type="ka:Organisation_ID"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSFREIMITS_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Sperrfreigabemitteilung SAM

Diagram	
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITS_Type
Used by	Element tns:TXSFREIMITS
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:samSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:samSperrkandidat, txbase
Source	<pre> <xs:complexType name="TXSFREIMITS_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung SAM</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SMIT_Type"> <xs:sequence> <xs:element name="samSperrkandidat" type="ion:SAM_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXTRANSABBRUCH_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Daten fuer unvollstaendig ausgefuehrte NM-Transaktion
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXTRANSABBRUCH_Type
Used by	Element tns:TXTRANSABBRUCH
Model	txbase , tns:AllgemeineTransaktionsdaten , tns:MKAH-PV-NM-MAC_ID{0,1} , tns:MKAH-PV-Nutzungszaehler{0,1} , tns:MKKVP--NM-MAC_ID{0,1} , tns:MKKVP-Nutzungszaehler{0,1}
Children	tns:AllgemeineTransaktionsdaten, tns:MKAH-PV-NM-MAC_ID, tns:MKAH-PV-Nutzungszaehler, tns:MKKVP--NM-MAC_ID, tns:MKKVP-Nutzungszaehler, txbase
Source	<pre> <xs:complexType name="TXTRANSABBRUCH_Type"> <xs:annotation> <xs:documentation>Typ: Daten fuer unvollstaendig ausgefuehrte NM-Transaktion</xs:documentation> </xs:annotation> </pre>

	<pre> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element ref="tns:AllgemeineTransaktionsdaten"/> <xs:element name="MKAH-PV-NM-MAC_ID" type="ion:SymSchluessel_ID_Type" minOccurs="0" maxOccurs="1"/> <xs:element name="MKAH-PV-Nutzungszaehler" type="ct:ReferenceNumberFour" minOccurs="0" maxOccurs="1"/> <xs:element name="MKKVP--NM-MAC_ID" type="ion:SymSchluessel_ID_Type" minOccurs="0" maxOccurs="1"/> <xs:element name="MKKVP-Nutzungszaehler" type="ct:ReferenceNumberFour" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Simple Type(s)

Simple Type tns:Validation_CODE_Type

Namespace	http://vdv/ka/kvp-dl-pv/2																																															
Annotations	BOM 6-62 Der Validation_CODE klassifiziert den Grund der Erstellung eines Kontrollnachweises ohne Transaktionsausfuehrung mit dem Nutzermedium																																															
Diagram																																																
Type	restriction of tns:INT1																																															
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:Validation_CODE_Type																																															
Facets	<table><tr><td>maxInclusive</td><td>255</td><td></td></tr><tr><td>minInclusive</td><td>0</td><td></td></tr><tr><td>enumeration</td><td>0</td><td>Keine Angabe</td></tr><tr><td>enumeration</td><td>1</td><td>Daten nicht authentisch</td></tr><tr><td>enumeration</td><td>2</td><td>Zeitlich ungueltig</td></tr><tr><td>enumeration</td><td>3</td><td>Raeumlich ungueltig</td></tr><tr><td>enumeration</td><td>4</td><td>Persoendlich ungueltig (fuer personengebundene Objekte)</td></tr><tr><td>enumeration</td><td>5</td><td>gesperrter SAM (nur Statische Berechtigung)</td></tr><tr><td>enumeration</td><td>6</td><td>gesperrte ORG (nur Statische Berechtigung)</td></tr><tr><td>enumeration</td><td>7</td><td>sym. Schluessel gesperrt oder nicht vorhanden</td></tr><tr><td>enumeration</td><td>8</td><td>asym. Schuessel gesperrt oder nicht vorhanden</td></tr><tr><td>enumeration</td><td>9</td><td>Status im App. Verzeichnis nicht gesetzt</td></tr><tr><td>enumeration</td><td>10</td><td>Ausgabetransaktionskennung fehlt</td></tr><tr><td>enumeration</td><td>11</td><td>Transportmittelkategorie abweichend vom aktuellen Verkehrsmittel</td></tr><tr><td>enumeration</td><td>19</td><td>gesperrt (EN 1545-1 blocked (19))</td></tr></table>			maxInclusive	255		minInclusive	0		enumeration	0	Keine Angabe	enumeration	1	Daten nicht authentisch	enumeration	2	Zeitlich ungueltig	enumeration	3	Raeumlich ungueltig	enumeration	4	Persoendlich ungueltig (fuer personengebundene Objekte)	enumeration	5	gesperrter SAM (nur Statische Berechtigung)	enumeration	6	gesperrte ORG (nur Statische Berechtigung)	enumeration	7	sym. Schluessel gesperrt oder nicht vorhanden	enumeration	8	asym. Schuessel gesperrt oder nicht vorhanden	enumeration	9	Status im App. Verzeichnis nicht gesetzt	enumeration	10	Ausgabetransaktionskennung fehlt	enumeration	11	Transportmittelkategorie abweichend vom aktuellen Verkehrsmittel	enumeration	19	gesperrt (EN 1545-1 blocked (19))
maxInclusive	255																																															
minInclusive	0																																															
enumeration	0	Keine Angabe																																														
enumeration	1	Daten nicht authentisch																																														
enumeration	2	Zeitlich ungueltig																																														
enumeration	3	Raeumlich ungueltig																																														
enumeration	4	Persoendlich ungueltig (fuer personengebundene Objekte)																																														
enumeration	5	gesperrter SAM (nur Statische Berechtigung)																																														
enumeration	6	gesperrte ORG (nur Statische Berechtigung)																																														
enumeration	7	sym. Schluessel gesperrt oder nicht vorhanden																																														
enumeration	8	asym. Schuessel gesperrt oder nicht vorhanden																																														
enumeration	9	Status im App. Verzeichnis nicht gesetzt																																														
enumeration	10	Ausgabetransaktionskennung fehlt																																														
enumeration	11	Transportmittelkategorie abweichend vom aktuellen Verkehrsmittel																																														
enumeration	19	gesperrt (EN 1545-1 blocked (19))																																														
Used by	Elements	tns:TXKNAWA_Type/tns:logValidationCode, tns:TXKNAWB_Type/tns:logValidationCode																																														
Source	<pre><xs:simpleType name="Validation_CODE_Type"> <xs:annotation> <xs:documentation>BOM 6-62 Der Validation_CODE klassifiziert den Grund der Erstellung eines Kontrollnachweises ohne Transaktionsausfuehrung mit dem Nutzermedium</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Keine Angabe</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>																																															

	<pre> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Daten nicht authentisch</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Zeitlich ungueltig</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Raeumlich ungueltig</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation>Persoenlich ungueltig (fuer personengebundene Objekte)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>gesperrter SAM (nur Statische Berechtigung)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="6"> <xs:annotation> <xs:documentation>gesperrte ORG (nur Statische Berechtigung)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="7"> <xs:annotation> <xs:documentation>sym. Schluessel gesperrt oder nicht vorhanden</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="8"> <xs:annotation> <xs:documentation>asym. Schuessel gesperrt oder nicht vorhanden</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="9"> <xs:annotation> <xs:documentation>Status im App. Verzeichnis nicht gesetzt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="10"> <xs:annotation> <xs:documentation>Ausgabetransaktionskennung fehlt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="11"> <xs:annotation> <xs:documentation>Transportmittelkategorie abweichend vom aktuellen Verkehrsmittel</ xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="19"> <xs:annotation> <xs:documentation>gesperrt (EN 1545-1 blocked (19))</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Simple Type `tns:Amount65535`

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram	<pre> classDiagram class Amount65535 class ctINT2["ct:INT2"] Amount65535 -- > ctINT2 </pre>		
Type	tns:INT2		
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT2 <ul style="list-style-type: none"> tns:Amount65535 		
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> </table>	maxInclusive	65535
maxInclusive	65535		

	minInclusive	0
Used by	Element	tns:TX_PP_Type/tns:ppLeistungsPreis
Source	<pre><xs:simpleType name="Amount65535"> <xs:restriction base="ct:INT2"/> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd	

Simple Type tns:Profil_CODE_Type

Namespace	http://vdv/ka/kvp-dl-pv/2	
Annotations	Typ: klassifiziert Kunden, Objekte, etc. bzgl. tarifrelevanter Gruppen des OePV BOM 6_45	
Diagram		
Type	restriction of tns:INT1	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:Profil_CODE_Type 	
Facets	maxInclusive	255
	minInclusive	0
	enumeration	0 nicht spezifiziert/unbestimmt
	enumeration	1 Erwachsener
	enumeration	2 Kind
	enumeration	3 Student
	enumeration	5 Behinderter
	enumeration	6 Sehbehinderter
	enumeration	7 Hoergeschaedigter
	enumeration	8 Arbeitsloser/Sozialhilfeempfaenger
	enumeration	9 Personal
	enumeration	10 Militaeranhoeeriger
	enumeration	19 Schueler
	enumeration	20 Azubi
	enumeration	25 Senior
Used by	Element	tns:Mitnahme_Type/tns:mitnahmeTyp
Source	<pre><xs:simpleType name="Profil_CODE_Type"> <xs:annotation> <xs:documentation>Typ: klassifiziert Kunden, Objekte, etc. bzgl. tarifrelevanter Gruppen des OePV BOM 6_45</xs:documentation> </xs:annotation> <!-- TODO: Fehler in BOM: Personal 7 Rechtschreibung + doppelt ?? Im anderen ist es richtig, Personal = 9, habe ich so uebernommen --> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>nicht spezifiziert/unbestimmt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Erwachsener</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Kind</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>	

	<pre> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Student</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>Behinderter</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="6"> <xs:annotation> <xs:documentation>Sehbehinderter</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="7"> <xs:annotation> <xs:documentation>Hoergeschaedigter</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="8"> <xs:annotation> <xs:documentation>Arbeitsloser/Sozialhilfeempfaenger</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="9"> <xs:annotation> <xs:documentation>Personal</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="10"> <xs:annotation> <xs:documentation>Militaeranhehoeriger</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="19"> <xs:annotation> <xs:documentation>Schueler</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="20"> <xs:annotation> <xs:documentation>Azubi</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="25"> <xs:annotation> <xs:documentation>Senior</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Simple Type tns:SelektionKriterien_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Selektionskriterion in XML Datumform. BOM 1107 Tabelle 6-18, heisst dort 'XML'
Diagram	<pre> classDiagram class SelektionKriterien_Type["tns:SelektionKriterien_Type"] class ctDateTime["ct:dateTime"] SelektionKriterien_Type -- > ctDateTime </pre>
Type	tns:DateTime
Type hierarchy	<ul style="list-style-type: none"> xs:dateTime tns:DateTime tns:SelektionKriterien_Type
Used by	Elements tns:TXANLN_Type/tns:transSelektionKriterien, tns:TXASBER_Type/tns:transSelektionKriterien, tns:TXAUSEFS_Type/tns:transSelektionKriterien
Source	<pre> <xs:simpleType name="SelektionKriterien_Type"> <xs:annotation> <xs:documentation>Typ: Selektionskriterion in XML Datumform. BOM 1107 Tabelle 6-18, heisst dort 'XML' </xs:documentation> </xs:annotation> </pre>

	<pre><xs:restriction base="ct:DateTime"/> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Simple Type `tns:Kundentyp_CODE_Type`

Namespace	http://vdv/ka/kvp-dl-pv/2																																															
Annotations	Der Kundentyp_CODE klassifiziert Kunden bzgl. typischer tarifrelevanter Kundengruppen des OePV. BOM 6-38																																															
Diagram																																																
Type	restriction of tns:INT1																																															
Type hierarchy	<ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:Kundentyp_CODE_Type																																															
Facets	<table><tr><td>maxInclusive</td><td>255</td><td></td></tr><tr><td>minInclusive</td><td>0</td><td></td></tr><tr><td>enumeration</td><td>0</td><td>nicht spezifiziert/unbestimmt</td></tr><tr><td>enumeration</td><td>1</td><td>Erwachsener</td></tr><tr><td>enumeration</td><td>2</td><td>Kind</td></tr><tr><td>enumeration</td><td>3</td><td>Student</td></tr><tr><td>enumeration</td><td>5</td><td>Behinderter</td></tr><tr><td>enumeration</td><td>6</td><td>Sehbehinderter</td></tr><tr><td>enumeration</td><td>7</td><td>Hoergeschaedigter</td></tr><tr><td>enumeration</td><td>8</td><td>Arbeitsloser/Sozialhilfeempfaenger</td></tr><tr><td>enumeration</td><td>9</td><td>Personal</td></tr><tr><td>enumeration</td><td>10</td><td>Militaeranhehoeriger</td></tr><tr><td>enumeration</td><td>19</td><td>Schueler</td></tr><tr><td>enumeration</td><td>20</td><td>Azubi</td></tr><tr><td>enumeration</td><td>25</td><td>Senior</td></tr></table>			maxInclusive	255		minInclusive	0		enumeration	0	nicht spezifiziert/unbestimmt	enumeration	1	Erwachsener	enumeration	2	Kind	enumeration	3	Student	enumeration	5	Behinderter	enumeration	6	Sehbehinderter	enumeration	7	Hoergeschaedigter	enumeration	8	Arbeitsloser/Sozialhilfeempfaenger	enumeration	9	Personal	enumeration	10	Militaeranhehoeriger	enumeration	19	Schueler	enumeration	20	Azubi	enumeration	25	Senior
maxInclusive	255																																															
minInclusive	0																																															
enumeration	0	nicht spezifiziert/unbestimmt																																														
enumeration	1	Erwachsener																																														
enumeration	2	Kind																																														
enumeration	3	Student																																														
enumeration	5	Behinderter																																														
enumeration	6	Sehbehinderter																																														
enumeration	7	Hoergeschaedigter																																														
enumeration	8	Arbeitsloser/Sozialhilfeempfaenger																																														
enumeration	9	Personal																																														
enumeration	10	Militaeranhehoeriger																																														
enumeration	19	Schueler																																														
enumeration	20	Azubi																																														
enumeration	25	Senior																																														
Used by	Elements	tns:TX_AFBLOG_Type/tns:afbLogFahrgastTyp, tns:TX_EFSLOG_Type/tns:efsFahrgastTyp																																														
Source	<pre><xs:simpleType name="Kundentyp_CODE_Type"> <xs:annotation> <xs:documentation>Der Kundentyp_CODE klassifiziert Kunden bzgl. typischer tarifrelevanter Kundengruppen des OePV. BOM 6-38</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>nicht spezifiziert/unbestimmt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Erwachsener</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Kind</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Student</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>Behinderter</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>																																															

	<pre> </xs:enumeration> <xs:enumeration value="6"> <xs:annotation> <xs:documentation>Sehbehinderter</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="7"> <xs:annotation> <xs:documentation>Hoergeschaedigter</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="8"> <xs:annotation> <xs:documentation>Arbeitsloser/Sozialhilfeempfaenger</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="9"> <xs:annotation> <xs:documentation>Personal</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="10"> <xs:annotation> <xs:documentation>Militaeranhehoeriger</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="19"> <xs:annotation> <xs:documentation>Schueler</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="20"> <xs:annotation> <xs:documentation>Azubi</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="25"> <xs:annotation> <xs:documentation>Senior</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Simple Type tns:ServiceKlasse_CODE_Type

Namespace	http://vdv/ka/kvp-dl-pv/2																	
Annotations	Der ServiceKlasse_CODE klassifiziert Servicequalitaeten der Transportdienstleistung. Haeufigstes Beispiel ist die Unterscheidung in 1. und 2. Klasse. BOM 6-49																	
Diagram																		
Type	restriction of tns:INT1																	
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:ServiceKlasse_CODE_Type																	
Facets	<table><tr><td>maxInclusive</td><td>255</td><td></td></tr><tr><td>minInclusive</td><td>0</td><td></td></tr><tr><td>enumeration</td><td>0</td><td>nicht spezifiziert/unbestimmt</td></tr><tr><td>enumeration</td><td>1</td><td>1. Klasse</td></tr><tr><td>enumeration</td><td>2</td><td>2. Klasse</td></tr></table>			maxInclusive	255		minInclusive	0		enumeration	0	nicht spezifiziert/unbestimmt	enumeration	1	1. Klasse	enumeration	2	2. Klasse
maxInclusive	255																	
minInclusive	0																	
enumeration	0	nicht spezifiziert/unbestimmt																
enumeration	1	1. Klasse																
enumeration	2	2. Klasse																
Used by	Elements tns:TX_AFBLOG_Type/tns:afbLogServiceKlasse, tns:TX_EFSLOG_Type/tns:efsLogServiceKlasse																	
Source	<pre><xs:simpleType name="ServiceKlasse_CODE_Type"> <xs:annotation> <xs:documentation>Der ServiceKlasse_CODE klassifiziert Servicequalitaeten der Transportdienstleistung. Haeufigstes Beispiel ist die Unterscheidung in 1. und 2. Klasse. BOM 6-49</xs:documentation></pre>																	

	<pre> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>nicht spezifiziert/unbestimmt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>1. Klasse</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>2. Klasse</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Simple Type tns:ServiceKlasseExtra_CODE_Type

Namespace	http://vdv/ka/kvp-dl-pv/2		
Annotations	Der ServiceKlasseExtra_CODE klassifiziert zusaetzliche Services/Servicequalitaeten im Zusammenhang mit der Transportdienstleistung. BOM 6-50		
Diagram			
Type	restriction of tns:INT1		
Type hierarchy	<ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:ServiceKlasseExtra_CODE_Type		
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	nicht spezifiziert/unbestimmt
	enumeration	1	Fruehstueck
	enumeration	2	Mittagessen
	enumeration	3	Abendessen
	enumeration	4	Buffet
	enumeration	5	Imbiss
Used by	Element	tns:TX_EFSLOG_Type/tns:efsServiceKlasseExtra	
Source	<pre><xs:simpleType name="ServiceKlasseExtra_CODE_Type"> <xs:annotation> <xs:documentation>Der ServiceKlasseExtra_CODE klassifiziert zusaetzliche Services/ Servicequalitaeten im Zusammenhang mit der Transportdienstleistung. BOM 6-50</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>nicht spezifiziert/unbestimmt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Fruehstueck</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Mittagessen</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Abendessen</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>		

	<pre> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation>Buffet</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>Imbiss</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Simple Type `tns:TransportTypeCode_Type`

Namespace	http://vdv/ka/kvp-dl-pv/2				
Annotations	<p>Der TransportTypeCode_Type oder TransportmittelKategorie_CODE bzw. Transportserviceart_CODE_Type (Spez BOM) klassifiziert Arten von Transportdienstleistungen im Sinne einer Qualitaetsklasse, z.B. "IC/EC", "ICE" bei der Deutschen Bahn. Diese Kategorien sind "marketinggetrieben" mit Auswirkungen auf den Preis und daher produktspezifisch. Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung TransportTypeEnum_Type im entsprechenden Schema (XML-Schema_KVP_DL_PV_Enums_ext-1.x.x.xsd) umgesetzt werden. Enumeration: Classifies types of transport services concerning quality. EN 1545: TransportTypeCode. See also Spec BOM table 6-86 and TransportTypeEnum_Type.</p>				
Diagram	<pre> graph LR TransportTypeCode_Type --> ct_INT1[ct:INT1] </pre>				
Type	tns:INT1				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:TransportTypeCode_Type 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	Simple Types tns:TransportmittelKategorie_CODE_Type, tns:Transportserviceart_CODE_Type				
Source	<pre> <xs:simpleType name="TransportTypeCode_Type"> <xs:annotation> <xs:documentation>Der TransportTypeCode_Type oder TransportmittelKategorie_CODE bzw. Transportserviceart_CODE_Type (Spez BOM) klassifiziert Arten von Transportdienstleistungen im Sinne einer Qualitaetsklasse, z.B. "IC/EC", "ICE" bei der Deutschen Bahn. Diese Kategorien sind "marketinggetrieben" mit Auswirkungen auf den Preis und daher produktspezifisch. Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung TransportTypeEnum_Type im entsprechenden Schema (XML-Schema_KVP_DL_PV_Enums_ext-1.x.x.xsd) umgesetzt werden. Enumeration: Classifies types of transport services concerning quality. EN 1545: TransportTypeCode. See also Spec BOM table 6-86 and TransportTypeEnum_Type.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"/> </xs:simpleType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Simple Type `tns:TransportmittelKategorie_CODE_Type`

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ, der die Kompatibilitaet zur BOM Spez. herstellt. Siehe TransportTypeCode_Type. Entfaellt demnaechst.
Diagram	<pre> graph LR TransportmittelKategorie_CODE_Type --> tns_TransportTypeCode_Type[tns:TransportTypeCode_Type] </pre>

Type	tns:TransportTypeCode_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:TransportTypeCode_Type tns:TransportmittelKategorie_CODE_Type 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	Element tns:TX_EFSLOG_Type/tns:efsVerkehrsmittelKategorie				
Source	<pre><xs:simpleType name="TransportmittelKategorie_CODE_Type"> <xs:annotation> <xs:documentation>Typ, der die Kompatibilitaet zur BOM Spez. herstellt. Siehe TransportTypeCode_Type. Entfaellt demnaechst.</xs:documentation> </xs:annotation> <xs:restriction base="tns:TransportTypeCode_Type" /> </xs:simpleType></pre>				
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Simple Type tns:Transportserviceart_CODE_Type

Namespace	http://vdv/ka/kvp-dl-pv/2				
Annotations	Typ, der die Kompatibilitaet zur BOM Spez. herstellt. Siehe TransportTypeCode_Type. Entfaellt demnaechst.				
Diagram					
Type	tns:TransportTypeCode_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:TransportTypeCode_Type tns:Transportserviceart_CODE_Type 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	Element tns:TX_AFBLOG_Type/tns:afbLogVerkehrsmittelart				
Source	<pre><xs:simpleType name="Transportserviceart_CODE_Type"> <xs:annotation> <xs:documentation>Typ, der die Kompatibilitaet zur BOM Spez. herstellt. Siehe TransportTypeCode_Type. Entfaellt demnaechst.</xs:documentation> </xs:annotation> <xs:restriction base="tns:TransportTypeCode_Type" /> </xs:simpleType></pre>				
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Namespace: "http://vdv/ka/ion/2"

Schema(s)

Imported schema XML-Schema_ION.xsd

Namespace	http://vdv/ka/ion/2						
Properties	<table> <tr> <td>attribute form default:</td><td>unqualified</td></tr> <tr> <td>element form default:</td><td>unqualified</td></tr> <tr> <td>version:</td><td>1.11.1</td></tr> </table>	attribute form default:	unqualified	element form default:	unqualified	version:	1.11.1
attribute form default:	unqualified						
element form default:	unqualified						
version:	1.11.1						
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element(s)

Element tns:TXB

Namespace	http://vdv/ka/ion/2
Annotations	Element: Bestaetigung einer ION-Transaktion
Diagram	
Type	tns:TXB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type tns:TXB_Type
Properties	content: complex
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit
Children	transOrigID, transOrigSignatur, transOriginalZeit, txbase
Instance	<pre><tns:TXB xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> </tns:TXB></pre>
Source	<pre><xs:element name="TXB" type="tns:TXB_Type"> <xs:annotation> <xs:documentation>Element: Bestaetigung einer ION-Transaktion</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXA

Namespace	http://vdv/ka/ion/2
Annotations	Element: Ablehnung einer ION-Transaktion
Diagram	
Type	tns:TXA_Type

Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_RET_Type • tns:TXA_Type
Properties	content: complex
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit , transAblehnungGrund
Children	transAblehnungGrund, transOrigID, transOrigSignatur, transOriginalZeit, txbase
Instance	<pre><tns:TXA xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> <transAblehnungGrund>{1,1}</transAblehnungGrund> </tns:TXA></pre>
Source	<pre><xs:element name="TXA" type="tns:TXA_Type"> <xs:annotation> <xs:documentation>Element: Ablehnung einer ION-Transaktion</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXBRequest

Namespace	http://vdv/ka/ion/2
Annotations	Element: Mitteilung eines Verarbeitungsstatus (OK)
Diagram	<pre> classDiagram class tnsTXB_Type class tnsTX_RET_Type["tns:TX_RET_Type (extension base)"] class tnsTX_BASE_Type["tns:TX_BASE_Type (extension base)"] class txbase class transOrigID class transOrigSignatur class transOriginalZeit tnsTXB_Type -- > tnsTX_RET_Type tnsTX_RET_Type -- > tnsTX_BASE_Type tnsTXB_Type -- txbase tnsTXB_Type -- transOrigID tnsTXB_Type -- transOrigSignatur tnsTXB_Type -- transOriginalZeit </pre>
Type	tns:TXB_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_RET_Type • tns:TXB_Type
Properties	content: complex
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit
Children	transOrigID, transOrigSignatur, transOriginalZeit, txbase
Instance	<pre><tns:TXBRequest xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> </tns:TXBRequest></pre>
Source	<pre><xs:element name="TXBRequest" type="tns:TXB_Type"> <xs:annotation> <xs:documentation>Element: Mitteilung eines Verarbeitungsstatus (OK)</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXARequest

Namespace	http://vdv/ka/ion/2
Annotations	Element: Mitteilung eines Verarbeitungsstatus (Fehlerhaft im Drittsystem)
Diagram	
Type	tns:TXA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type tns:TXA_Type
Properties	content: complex
Model	txbase, transOrigID, transOrigSignatur{0,1}, transOriginalZeit, transAblehnungGrund
Children	transAblehnungGrund, transOrigID, transOrigSignatur, transOriginalZeit, txbase
Instance	<pre><tns:TXARequest xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> <transAblehnungGrund>{1,1}</transAblehnungGrund> </tns:TXARequest></pre>
Source	<pre><xs:element name="TXARequest" type="tns:TXA_Type"> <xs:annotation> <xs:documentation>Element: Mitteilung eines Verarbeitungsstatus (Fehlerhaft im Drittsystem)</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXDEABER

Namespace	http://vdv/ka/ion/2
Annotations	Element: Dienstanfrage: "Loeschen einer Produkt-Akzeptanz von allen akzeptierenden Organisationen"
Diagram	
Type	tns:TXDEABER_Req_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXDEABER_Req_Type

Properties	content: complex
Model	txbase , prodAkzeptanzEnde , prodProdukt_ID
Children	prodAkzeptanzEnde, prodProdukt_ID, txbase
Instance	<pre><tns:TXDEABER xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <prodAkzeptanzEnde>{1,1}</prodAkzeptanzEnde> <prodProdukt_ID>{1,1}</prodProdukt_ID> </tns:TXDEABER></pre>
Source	<pre><xs:element name="TXDEABER" type="tns:TXDEABER_Req_Type"> <xs:annotation> <xs:documentation>Element: Dienstanfrage: "Loeschen einer Produkt-Akzeptanz von allen akzeptierenden Organisationen"</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSMITA

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrmitteilung Applikation
Diagram	
Type	tns:TXSMITA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITA_Type
Properties	content: complex nillable: false
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , appSperrkandidat
Children	appSperrkandidat, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSMITA xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <appSperrkandidat>{1,1}</appSperrkandidat> </tns:TXSMITA></pre>
Source	<pre><xs:element name="TXSMITA" type="tns:TXSMITA_Type" nillable="false"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung Applikation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSFREIMITA

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrfreigabemitteilung Applikation

Diagram	
Type	tns:TXSFREIMITA_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SMIT_Type • tns:TXSMITA_Type • tns:TXSFREIMITA_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , appSperrkandidat
Children	appSperrkandidat, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSFREIMITA xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <appSperrkandidat>{1,1}</appSperrkandidat> </tns:TXSFREIMITA></pre>
Source	<pre><xs:element name="TXSFREIMITA" type="tns:TXSFREIMITA_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung Applikation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSANFSYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperranforderung fuer einen symmetrischen Schluessel
Diagram	
Type	tns:TXSANFSYMK_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SANF_Type • tns:TXSANFSYMK_Type

Properties	content: complex
Model	txbase , sperrSperrgrund , keySperrkandidatsym
Children	keySperrkandidatsym, sperrSperrgrund, txbase
Instance	<pre><tns:TXSANFSYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSANFSYMK></pre>
Source	<pre><xs:element name="TXSANFSYMK" type="tns:TXSANFSYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperranforderung fuer einen symmetrischen Schluessel</ xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSANFASYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperranforderung fuer einen asymmetrischen Schluessel
Diagram	
Type	tns:TXSANFASYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFASYMK_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , keySperrkandidatasym
Children	keySperrkandidatasym, sperrSperrgrund, txbase
Instance	<pre><tns:TXSANFASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <keySperrkandidatasym>{1,1}</keySperrkandidatasym> </tns:TXSANFASYMK></pre>
Source	<pre><xs:element name="TXSANFASYMK" type="tns:TXSANFASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperranforderung fuer einen asymmetrischen Schluessel</ xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSAANFSYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperraufhebungsanforderung fuer einen symmetrischen Schluessel

Diagram	<p>The diagram illustrates the structure of the <code>tns:TXSAANFSYMK_Type</code>. It is a complex type that extends <code>tns:TX_BASE_Type</code> (which in turn extends <code>tns:TX_SANF_Type</code>, which extends <code>tns:TXSAANFSYMK_Type</code> (extension base)). The <code>tns:TXSAANFSYMK_Type</code> contains three child elements: <code>txbase</code>, <code>sperrSperrgrund</code>, and <code>keySperrkandidatsym</code>.</p>
Type	<code>tns:TXSAANFSYMK_Type</code>
Type hierarchy	<ul style="list-style-type: none"> • <code>tns:TX_BASE_Type</code> • <code>tns:TX_SANF_Type</code> • <code>tns:TXSAANFSYMK_Type</code> • <code>tns:TXSAANFSYMK_Type</code>
Properties	content: complex
Model	<code>txbase</code> , <code>sperrSperrgrund</code> , <code>keySperrkandidatsym</code>
Children	<code>keySperrkandidatsym</code> , <code>sperrSperrgrund</code> , <code>txbase</code>
Instance	<pre><tns:TXSAANFSYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSAANFSYMK></pre>
Source	<pre><xs:element name="TXSAANFSYMK" type="tns:TXSAANFSYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperraufhebungsanforderung fuer einen symmetrischen Schluessel</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element `tns:TXSAANFASYMK`

Namespace	<code>http://vdv/ka/ion/2</code>
Annotations	Element: Sperraufhebungsanforderung fuer einen asymmetrischen Schluessel
Diagram	<p>The diagram illustrates the structure of the <code>tns:TXSAANFASYMK_Type</code>. It is a complex type that extends <code>tns:TX_BASE_Type</code> (which in turn extends <code>tns:TX_SANF_Type</code>, which extends <code>tns:TXSAANFASYMK_Type</code> (extension base)). The <code>tns:TXSAANFASYMK_Type</code> contains three child elements: <code>txbase</code>, <code>sperrSperrgrund</code>, and <code>keySperrkandidatsym</code>.</p>
Type	<code>tns:TXSAANFASYMK_Type</code>
Type hierarchy	<ul style="list-style-type: none"> • <code>tns:TX_BASE_Type</code> • <code>tns:TX_SANF_Type</code> • <code>tns:TXSAANFASYMK_Type</code>

	<ul style="list-style-type: none"> • tns:TXSAANFASYMK_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , keySperrkandidatasymp
Children	keySperrkandidatasymp, sperrSperrgrund, txbase
Instance	<pre><tns:TXSAANFASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <keySperrkandidatasymp>{1,1}</keySperrkandidatasymp> </tns:TXSAANFASYMK></pre>
Source	<pre><xs:element name="TXSAANFASYMK" type="tns:TXSAANFASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperraufhebungsanforderung fuer einen asymmetrischen Schluessel</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSFREIMITSYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrfreigabemitteilung symmetrischer Key
Diagram	
Type	tns:TXSFREIMITSYMK_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SFMIT_Type • tns:TXSFREIMITSYMK_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym
Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSFREIMITSYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSFREIMITSYMK></pre>
Source	<pre><xs:element name="TXSFREIMITSYMK" type="tns:TXSFREIMITSYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung symmetrischer Key</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSFREIMITASYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrfreigabemitteilung asymmetrischer Key

Diagram	
Type	tns:TXSFREIMITASYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITASYMK_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym
Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSFREIMITASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSFREIMITASYMK></pre>
Source	<pre><xs:element name="TXSFREIMITASYMK" type="tns:TXSFREIMITASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung asymmetrischer Key</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSMITSYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrmitteilung symmetrischer Schluesel
Diagram	
Type	tns:TXSMITSYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITSYMK_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym

Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSMITSYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSMITSYMK></pre>
Source	<pre><xs:element name="TXSMITSYMK" type="tns:TXSMITSYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung symmetrischer Schluessel</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSMITASYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrmitteilung asymmetrischer Schluessel
Diagram	<pre> classDiagram class tnsTXSMITASYMK_Type { txbase sperrAnforderungBezug sperrEntscheidung keySperrkandidatsym } class tnsTX_SMIT_Type { txbase sperrAnforderungBezug sperrEntscheidung } class tnsTX_BASE_Type { txbase } tnsTXSMITASYMK_Type -- > tnsTX_SMIT_Type tnsTX_SMIT_Type -- > tnsTX_BASE_Type </pre>
Type	tns:TXSMITASYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITASYMK_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym
Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSMITASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSMITASYMK></pre>
Source	<pre><xs:element name="TXSMITASYMK" type="tns:TXSMITASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung asymmetrischer Schluessel</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSNAWA

Namespace	http://vdv/ka/ion/2
Annotations	Element: Dienstanfrage "Sperrnachweis Applikation"

Diagram	
Type	tns:TXSNAWA_Req_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXSNAWA_Req_Type
Properties	content: complex
Model	txbase , (samSperrkandidat orgSperrkandidat) , zyklusNummer , sperrrtransaktionApplikation , appNmTransaktionMAC
Children	appNmTransaktionMAC, orgSperrkandidat, samSperrkandidat, sperrrtransaktionApplikation, txbase, zyklusNummer
Instance	<pre><tns:TXSNAWA xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <samSperrkandidat>{1,1}</samSperrkandidat> <orgSperrkandidat>{1,1}</orgSperrkandidat> <zyklusNummer>{1,1}</zyklusNummer> <sperrrtransaktionApplikation>{1,1}</sperrrtransaktionApplikation> <appNmTransaktionMAC>{1,1}</appNmTransaktionMAC> </tns:TXSNAWA></pre>
Source	<pre><xs:element name="TXSNAWA" type="tns:TXSNAWA_Req_Type"> <xs:annotation> <xs:documentation>Element: Dienstanfrage "Sperrnachweis Applikation"</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSNAWB

Namespace	http://vdv/ka/ion/2
Annotations	Element: Dienstanfrage "Sperrnachweis Berechtigung"
Diagram	
Type	tns:TXSNAWB_Req_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXSNAWB_Req_Type
Properties	content: complex
Model	txbase , (samSperrkandidat orgSperrkandidat) , zyklusNummer , sperrrtransaktionBerechtigung , berNmTransaktionMAC

Children	berNmTransaktionMAC, orgSperrkandidat, samSperrkandidat, sperrtransaktionBerechtigung, txbase, zyklusNummer
Instance	<pre><tns:TXSNAWB xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <samSperrkandidat>{1,1}</samSperrkandidat> <orgSperrkandidat>{1,1}</orgSperrkandidat> <zyklusNummer>{1,1}</zyklusNummer> <sperrtransaktionBerechtigung>{1,1}</sperrtransaktionBerechtigung> <berNmTransaktionMAC>{1,1}</berNmTransaktionMAC> </tns:TXSNAWB></pre>
Source	<pre><xs:element name="TXSNAWB" type="tns:TXSNAWB_Req_Type"> <xs:annotation> <xs:documentation>Element: Dienstanfrage "Sperrnachweis Berechtigung"</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type(s)

Complex Type tns:TX_BASE_Type

Namespace	http://vdv/ka/ion/2
Annotations	Basisdaten fuer alle Transaktionen
Diagram	<pre> classDiagram class TX_BASE_Type class txbase TX_BASE_Type -- txbase </pre>
Used by	<p>Complex Types</p> <p>tns:TXABER_Type, tns:TXADM_Type, tns:TXAEBER_Type, tns:TXAEBER_Type_1_3_0, tns:TX-AENBER_Type, tns:TXANLN_Type, tns:TXAS_Type, tns:TXAUSEFS_Type, tns:TXBEKODL_Type, tns:TXBEWEBKOKVP_Type, tns:TXDEABER_Req_Type, tns:TXEBER_Type, tns:TXGKO_Type, tns:TXGWEB_Type, tns:TXKNAWA_Type, tns:TXKNAWB_Type, tns:TXLPEB_Type, tns:TXRBER_Type, tns:TXSNAWA_Req_Type, tns:TXSNAWB_Req_Type, tns:TXTRANSABBRUCH_Type, tns:TXUEBERKON_Type, tns:TX_RET_Type, tns:TX_SANF_Type, tns:TX_SMIT_Type</p>
Model	txbase
Children	txbase
Source	<pre><xs:complexType name="TX_BASE_Type"> <xs:annotation> <xs:documentation>Basisdaten fuer alle Transaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="txbase" type="tns:ION_TX_HEADER_Type"> <xs:annotation> <xs:documentation>Fachliche Daten ueber die in der Transaktion involvierten Systeme</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:ION_TX_HEADER_Type

Namespace	http://vdv/ka/ion/2
Annotations	Routing relevante Daten des Nachrichtenkopfs von VDV KA Transaktionen

Diagram	
Used by	Element tns:TX_BASE_Type/txbase
Model	transAuftrag{0,1} , transEmpfaenger_ID , transEmpfaengerRolle , transStatus{0,1} , transTransaktion_ID , transTransaktionsTyp{0,1} , transTransaktionsZeitpunkt , transVersion{0,1} , transWiederholungsZaehler{0,1} , transSignaturTyp{0,1} , transSignaturZertifikat{0,1} , transSignatur{0,1}
Children	transAuftrag, transEmpfaengerRolle, transEmpfaenger_ID, transSignatur, transSignaturTyp, transSignaturZertifikat, transStatus, transTransaktion_ID, transTransaktionsTyp, transTransaktionsZeitpunkt, transVersion, transWiederholungsZaehler
Source	<pre> <xs:complexType name="ION_TX_HEADER_Type"> <xs:annotation> <xs:documentation>Routing relevante Daten des Nachrichtenkopfs von VDV KA Transaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="transAuftrag" type="xs:string" minOccurs="0" maxOccurs="1"/> <xs:element name="transEmpfaenger_ID" type="ka:Organisation_ID"> <xs:annotation> <xs:documentation>Eindeutige OrganisationsId des Nachrichtempfaengers</xs:documentation> </xs:annotation> </xs:element> <xs:element name="transEmpfaengerRolle" type="ka:KommunikationsParterRolle"> <xs:annotation> <xs:documentation>Rolle des Nachrichtempfaengers</xs:documentation> </xs:annotation> </xs:element> <xs:element name="transStatus" type="ct:INT1" minOccurs="0" maxOccurs="1"/> <xs:element name="transTransaktion_ID" type="tns:IONTransaktion_ID_Type"/> <xs:element name="transTransaktionsTyp" type="ct:INT1" minOccurs="0" maxOccurs="1"/> <xs:element name="transTransaktionsZeitpunkt" type="ct:DateTime"> <xs:annotation> <xs:documentation>Zeitpunkt der Dienstanfrage gemaess den Angaben der Dienstauftrufers. Achtung: Aufgrund von potentiell unsynchronisierten, lokalen Uhren der Kommunikationspartnern ist moeglicherweise die Aussagekraft dieses Feldes sehr gering.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="transVersion" type="ct:BitString16" minOccurs="0" maxOccurs="1"/> <xs:element name="transWiederholungsZaehler" type="ct:INT1" minOccurs="0" maxOccurs="1"/> <xs:element name="transSignaturTyp" type="ct:INT1" minOccurs="0" maxOccurs="1"/> <xs:element name="transSignaturZertifikat" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:hexBinary"> <xs:length value="378" fixed="true"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:element name="transSignatur" minOccurs="0" maxOccurs="1" type="tns:TransSignatur_Type"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:IONTransaktion_ID_Type

Namespace	http://vdv/ka/ion/2
-----------	---------------------

Annotations	Typ: ID fuer Transaktionen, die ueber das ION (Interoperables Netzwerk) durchgefuehrt werden. Aufgabe dieses Elements ist es, eine Korrelation zwischen der Dienstantwort und der ursprunglichen Dienstanfrage herzustellen. transSequenznummer wird initial vom Dienstafrufer vergeben und wird unveraendert fuer die Dauer der Kommunikation genutzt.
Diagram	
Used by	Elements tns:ION_TX_HEADER_Type/transTransaktion_ID, tns:TX_RET_Type/transOrigID, tns:TX_SMIT_Type/sperrAnforderungBezug
Model	transSequenznummer , transSenderRolle , transSender_ID
Children	transSenderRolle, transSender_ID, transSequenznummer
Source	<pre><xs:complexType name="IONTransaktion_ID_Type"> <xs:annotation> <xs:documentation>Typ: ID fuer Transaktionen, die ueber das ION (Interoperables Netzwerk) durchgefuehrt werden. Aufgabe dieses Elements ist es, eine Korrelation zwischen der Dienstantwort und der ursprunglichen Dienstanfrage herzustellen. transSequenznummer wird initial vom Dienstafrufer vergeben und wird unveraendert fuer die Dauer der Kommunikation genutzt.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="transSequenznummer" type="ct:SequenceNumberFour"/> <xs:element name="transSenderRolle" type="ka:KommunikationsParterRolle"/> <xs:element name="transSender_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TX_BER_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Basisdaten fuer Berechtigungstransaktionen
Diagram	
Used by	Elements tns:TXABER_Type/tns:tx_ber, tns:TXAEBER_Type/tns:tx_ber, tns:TXAEBER_Type_1_3_0/tns:tx_ber
Model	berGueltigkeitsbeginn , berGueltigkeitsende , prodAbrechnungsVerfahren , berBezahlArt , berBezahlMittel
Children	berBezahlArt, berBezahlMittel, berGueltigkeitsbeginn, berGueltigkeitsende, prodAbrechnungsVerfahren
Source	<pre><xs:complexType name="TX_BER_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Berechtigungstransaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berGueltigkeitsbeginn" type="ct:DateTimeCompact"/> <xs:element name="berGueltigkeitsende" type="ct:DateTimeCompact"/> <!-- Wilk Hoffmann: korrigiert --> <xs:element name="prodAbrechnungsVerfahren" type="tns:Abrechnungsverfahren_CODE_Type"/> <!-- Wilk Hoffmann: korrigiert --> <xs:element name="berBezahlArt" type="tns:Bezahlart_CODE_Type"/> <xs:element name="berBezahlMittel" type="ct:OctetString10"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:Berechtigung_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: ID einer Berechtigung
Diagram	
Used by	Elements tns:TXAEBER_Type_1_3_0/tns:berBerechtigung_ID, tns:TXANLN_Type/tns:berBerechtigung_ID, tns:TXASBER_Type/tns:berBerechtigung_ID, tns:TXAUSEFS_Type/tns:berBerechtigung_ID, tns:TXBEKODL_Type/tns:berBerechtigung_ID, tns:TXKNAWB_Type/tns:berBerechtigung_ID, tns:TXSANFB_Type/tns:berBerechtigung_ID, tns:TXSFREIMITB_Type/tns:berSperrkandidat, tns:TXSMITB_Type/tns:berSperrkandidat
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Source	<pre><xs:complexType name="Berechtigung_ID_Type"> <xs:annotation> <xs:documentation>Typ: ID einer Berechtigung</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berechtigungNummer" type="ct:ReferenceNumberFour" /> <xs:element name="kvp_ID" type="ka:Organisation_ID" /> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:EFMProdukt_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Datenstruktur EFMProdukt_ID, bestehend aus Produktverantwortlichen und Produktnummer (zusammen eindeutig)
Diagram	
Used by	Elements tns:TXAEBER_Type_1_3_0/tns:prodProdukt_ID, tns:TXANLN_Type/tns:prodProdukt_ID, tns:TXASBER_Type/tns:prodProdukt_ID, tns:TXAUSEFS_Type/tns:prodProdukt_ID, tns:TXDEABER_Type/tns:prodProdukt_ID, tns:TXSANFB_Type/tns:prodProdukt_ID
Model	produktNummer{0,1} , organisationID
Children	organisationID, produktNummer
Source	<pre><xs:complexType name="EFMProdukt_ID_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur EFMProdukt_ID, bestehend aus Produktverantwortlichen und Produktnummer (zusammen eindeutig)</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="produktNummer" type="ct:ReferenceNumberTwo" minOccurs="0" maxOccurs="1" /> <xs:element name="organisationID" type="ka:Organisation_ID" /> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:Ort_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Datenstruktur Ort_ID
Diagram	
Used by	Elements tns:AllgemeineTransaktionsdaten/tns:logTransaktionsOrt_ID, tns:EFSViaOrtsListe_Type/tns:efsViaort_ID, tns:TXKNAWA_Type/tns:logTransaktionsOrt_ID, tns:TXK-

	NAWB_Type/tns:logTransaktionsOrt_ID, tns:TX_EFSLOG_Type/tns:efsStartort_ID, tns:TX_EFSLOG_Type/tns:efsZielort_ID, tns:TX_LOG_Type/tns:logTransaktionsort_ID
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Source	<pre> <xs:complexType name="Ort_ID_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur Ort_ID</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="ortTyp" type="tns:OrtsTyp_CODE_Type" /> <xs:element name="ortNummer" type="ct:ReferenceNumberThree" /> <!-- Wilk Hoffmann: korrigiert --> <xs:element name="ortDomaene_ID" type="ka:Organisation_ID" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:Terminal_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Datenstruktur Terminal_ID
Diagram	
Used by	Elements tns:AllgemeineTransaktionsdaten/tns:logTerminal_ID, tns:TXKNAWA_Type/tns:logTerminal_ID, tns:TXKNAWB_Type/tns:logTerminal_ID
Model	terminalTyp , terminalNummer , terminalOwner_ID
Children	terminalNummer, terminalOwner_ID, terminalTyp
Source	<pre> <xs:complexType name="Terminal_ID_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur Terminal_ID</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="terminalTyp" type="tns:TerminalTyp_CODE_Type" /> <xs:element name="terminalNummer" type="ct:ReferenceNumberTwo" /> <xs:element name="terminalOwner_ID" type="ka:Organisation_ID" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:NmApplikationInstanz_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: ID einer Applikationsinstanz auf dem Nutzermedium
Diagram	
Used by	Elements tns:TXADM_Type/tns:transappInstanz_ID, tns:TXKNAWA_Type/tns:appInstanz_ID, tns:TXSAN-FA_Type/tns:appInstanz_ID, tns:TXSMITA_Type/appSperrkandidat
Model	NmAppInstanznummer , kvp_ID
Children	NmAppInstanznummer, kvp_ID
Source	<pre> <xs:complexType name="NmApplikationInstanz_ID_Type"> <xs:annotation> <xs:documentation>Typ: ID einer Applikationsinstanz auf dem Nutzermedium</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="NmAppInstanznummer" type="ct:ReferenceNumberFour" /> <xs:element name="kvp_ID" type="ka:Organisation_ID" /> </xs:sequence> </xs:complexType> </pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd
-----------------	---

Complex Type tns:Transaktionsdatensatz_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Transaktionsdatensatz
Diagram	
Used by	Elements tns:TXABER_Type/tns:ausgabeTransaktionBerechtigung, tns:TXAENBER_Type/tns:fahrttransaktion, tns:TXBEKODL_Type/tns:fahrttransaktion, tns:TXBEWEBKOKVP_Type/tns:belastungstransaktionBerechtigung, tns:TXEBER_Type/tns:fahrttransaktion, tns:TXGKO_Type/tns:belastungstransaktionBerechtigung, tns:TXGWEB_Type/tns:belastungstransaktionBerechtigung, tns:TXLPEB_Type/tns:einzahlungsbelegBerechtigung, tns:TXRBER_Type/tns:ruecknahmeTransaktionBerechtigung, tns:TXSNAWA_Req_Type/sperrtransaktionApplikation, tns:TXSNAWB_Req_Type/sperrtransaktionBerechtigung
Model	Transaktionsdaten
Children	Transaktionsdaten
Source	<pre><xs:complexType name="Transaktionsdatensatz_Type"> <xs:annotation> <xs:documentation>Typ: Transaktionsdatensatz</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="Transaktionsdaten" type="xs:hexBinary" /> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:SymSchluessel_ID_Type

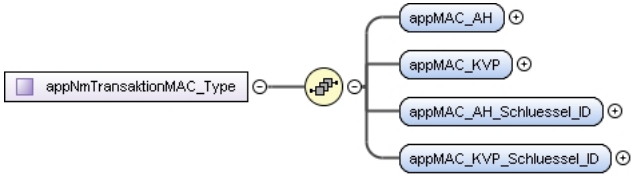
Namespace	http://vdv/ka/ion/2
Annotations	Typ: Schluessel ID
Diagram	
Used by	Elements tns:TXASKON_Type/tns:samSchluessel_ID, tns:TXSANFSYMK_Type/keySperrkandidatsym, tns:TXSFREIMITSYMK_Type/keySperrkandidatsym, tns:TXSMITSYMK_Type/keySperrkandidatsym, tns:TXTRANSABBRUCH_Type/tns:MKAH-PV-NM-MAC_ID, tns:TXTRANSABBRUCH_Type/tns:MKKVP--NM-MAC_ID, tns:TXUEBERKON_Type/tns:samSchluessel_ID, tns:appNmTransaktionMAC_Type/appMAC_AH_Schluessel_ID, tns:appNmTransaktionMAC_Type/appMAC_KVP_Schluessel_ID, tns:berNmTransaktionMAC_Type/berMAC_KVP_Schluessel_ID, tns:berNmTransaktionMAC_Type/berMAC_PV_Schluessel_ID
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Source	<pre><xs:complexType name="SymSchluessel_ID_Type"> <xs:annotation> <xs:documentation>Typ: Schluessel ID</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="schluesselNummer" type="ct:INT1" /> <xs:element name="schluesselVersion" type="ct:INT1" /> <xs:element name="schluesselInhaber_ID" type="ct:ReferenceNumberTwo" /> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:ASymSchluessel_ID_Type

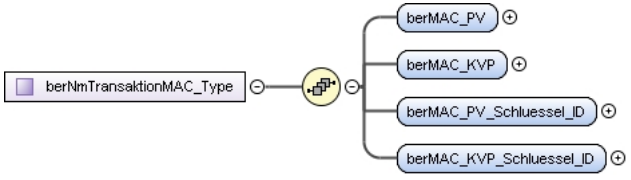
Namespace	http://vdv/ka/ion/2
-----------	---------------------

Annotations	Type: Identifizierungsmerkmal, das den Schlüssel eindeutig bestimmt.
Diagram	
Used by	Elements tns:TXSANFASYMK_Type/keySperrkandidatasy, tns:TXSFREIMITASYMK_Type/keySperrkandidatasy, tns:TXSMITASYMK_Type/keySperrkandidatasy
Model	signaturSchlüssel
Children	signaturSchlüssel
Source	<pre> <xs:complexType name="ASymSchlüssel_ID_Type"> <xs:annotation> <xs:documentation>Type: Identifizierungsmerkmal, das den Schlüssel eindeutig bestimmt.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="signaturSchlüssel" type="ct:OctetString12"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:appNmTransaktionMAC_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: MAC-Sicherung fuer Applikations-Transaktionen
Diagram	
Used by	Element tns:TXSNAWA_Req_Type/appNmTransaktionMAC
Model	appMAC_AH , appMAC_KVP , appMAC_AH_Schlüssel_ID , appMAC_KVP_Schlüssel_ID
Children	appMAC_AH, appMAC_AH_Schlüssel_ID, appMAC_KVP, appMAC_KVP_Schlüssel_ID
Source	<pre> <xs:complexType name="appNmTransaktionMAC_Type"> <xs:annotation> <xs:documentation>Typ: MAC-Sicherung fuer Applikations-Transaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="appMAC_AH" type="ct:OctetString8"/> <xs:element name="appMAC_KVP" type="ct:OctetString8"/> <xs:element name="appMAC_AH_Schlüssel_ID" type="tns:SymSchlüssel_ID_Type"/> <xs:element name="appMAC_KVP_Schlüssel_ID" type="tns:SymSchlüssel_ID_Type"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:berNmTransaktionMAC_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: MAC-Sicherung fuer Berechtigungs-Transaktionen
Diagram	
Used by	Elements tns:TXABER_Type/tns:berNmTransaktionMAC, tns:TXAENBER_Type/tns:berNmTransaktionMAC, tns:TXBEKODL_Type/tns:berNmTransaktionMAC, tns:TXBEWEBKOKVP_Type/tns:berNmTransaktionMAC, tns:TXEBER_Type/tns:berNmTransaktionMAC, tns:TXGKO_Type/tns:berNmTransaktionMAC, tns:TXGWEB_Type/tns:berNmTransaktionMAC, tns:TXLPEB_Type/tns:berNmTransaktionMAC, tns:TXRBER_Type/tns:berNmTransaktionMAC, tns:TXSNAWB_Req_Type/berNmTransaktionMAC

Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schlüssel_ID , berMAC_KVP_Schlüssel_ID
Children	berMAC_KVP, berMAC_KVP_Schlüssel_ID, berMAC_PV, berMAC_PV_Schlüssel_ID
Source	<pre> <xs:complexType name="berNmTransaktionMAC_Type"> <xs:annotation> <xs:documentation>Typ: MAC-Sicherung fuer Berechtigungs-Transaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berMAC_PV" type="ct:OctetString8"/> <xs:element name="berMAC_KVP" type="ct:OctetString8"/> <xs:element name="berMAC_PV_Schlüssel_ID" type="tns:SymSchlüssel_ID_Type"/> <xs:element name="berMAC_KVP_Schlüssel_ID" type="tns:SymSchlüssel_ID_Type"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TX_RET_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Basisdaten fuer Antworttransaktion
Diagram	<pre> classDiagram class tns_TX_BASE_Type["tns:TX_BASE_Type (extension base)"] class tns_TX_RET_Type["tns:TX_RET_Type"] tns_TX_RET_Type -- > tns_TX_BASE_Type tns_TX_RET_Type -- transOrigID : tns:IONTransaktion_ID_Type tns_TX_RET_Type -- transOrigSignatur : tns:TransSignatur_Type tns_TX_RET_Type -- transOriginalZeit : xs:dateTime </pre>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type
Used by	Complex Types tns:TXA_Type, tns:TXB_Type
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit
Children	transOrigID, transOrigSignatur, transOriginalZeit, txbase
Source	<pre> <xs:complexType name="TX_RET_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Antworttransaktion</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:element name="transOrigID" type="tns:IONTransaktion_ID_Type"/> <xs:element name="transOrigSignatur" minOccurs="0" maxOccurs="1" type="tns:TransSignatur_Type"/> <xs:element name="transOriginalZeit" type="xs:dateTime"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TX_SMIT_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Basisdaten fuer Sperrmitteilungen
Diagram	<pre> classDiagram class tns_TX_BASE_Type["tns:TX_BASE_Type (extension base)"] class tns_TX_SMIT_Type["tns:TX_SMIT_Type"] tns_TX_SMIT_Type -- > tns_TX_BASE_Type tns_TX_SMIT_Type -- txbase tns_TX_SMIT_Type -- sperrAnforderungBezug tns_TX_SMIT_Type -- sperrEntscheidung </pre>

Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type
Used by	Complex Types tns:TXSFREIMITASYMK_Type, tns:TXSFREIMITB_Type, tns:TXSFREIMITO_Type, tns:TXSFREIMITSYMK_Type, tns:TXSFREIMITS_Type, tns:TXSMITASYMK_Type, tns:TXSMITTA_Type, tns:TXSMITB_Type, tns:TXSMITO_Type, tns:TXSMITSYMK_Type, tns:TXSMITS_Type
Model	txbase , sperrAnforderungBezug , sperrEntscheidung
Children	sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre><xs:complexType name="TX_SMIT_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Sperrmitteilungen</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:element name="sperrAnforderungBezug" type="tns:IONTransaktion_ID_Type"/> <xs:element name="sperrEntscheidung" type="tns:Mitteilung_CODE_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TX_SANF_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Basisdaten fuer Sperranforderungen
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type
Used by	Complex Types tns:TXSANFASYMK_Type, tns:TXSANFA_Type, tns:TXSANFB_Type, tns:TXSANFSYMK_Type
Model	txbase , sperrSperrgrund
Children	sperrSperrgrund, txbase
Source	<pre><xs:complexType name="TX_SANF_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Sperranforderungen</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <!-- Wilk Hoffmann: muss spaeter aus Aufzaehlung kommen --> <xs:element name="sperrSperrgrund" type="ct:INT1"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXA_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Ablehnung einer ION-Transaktion

Diagram	
Type	extension of tns:TX_RET_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type tns:TXA_Type
Used by	Elements tns:TXA, tns:TXARequest
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit , transAblehnungGrund
Children	transAblehnungGrund, transOrigID, transOrigSignatur, transOriginalZeit, txbase
Source	<pre> <xs:complexType name="TXA_Type"> <xs:annotation> <xs:documentation>Typ: Ablehnung einer ION-Transaktion</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_RET_Type"> <xs:sequence> <xs:element name="transAblehnungGrund" type="ct:INT1"> <xs:annotation> <xs:documentation>WICHTIG: Aus Historischen Gruenden ist TXA_Type ein allgemeiner Typ, der von allen teilnehmenden Systemen genutzt wird. Das fuehrt dazu, dass sich alle Systeme dieselben 'transAblehnungGrund' Fehlercodes teilen. Dies ist suboptimal, da, wann immer sich einer der 'transAblehnungGrund' Fehlercodes veraendert, alle teilnehmenden Systeme angepasst, getestet und in einer neuen Version zur Verfuegung gestellt werden muessten. Um TXA wie bisher weiterverwenden zu koennen, und um das beschriebene Abhaengigkeitsproblem zu vermeiden, wurde dieses Feld nicht mit expliziter Aufzaehlung der moeglichen Fehlercodes, sondern mit einem simplen numerischen Typen versehen. Die genauen Fehlercodes sind der Schnittstelle des jeweiligen konkreten teilnehmenden Systems zu entnehmen. Die Codes 0 bis 9 (einschliesslich) sind fuer allgemeine Fehler reserviert und duerfen von den teilnehmenden Systemen nur fuer die vorgesehene Semantik verwendet werden (siehe Typ 'CommonServiceResultCode'). Es wird empfohlen, fuer die vollstaendigkeit der Schnittstelle, in den XSDs des jeweiligen Systems einen Aufzaehlungstypen vom Basistypen 'ct:INT1' mit den jeweiligen Fehlercodes des Systems zu definieren.</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXB_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Bestaetigung einer ION-Transaktion
Diagram	

Type	extension of tns:TX_RET_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type tns:TXB_Type
Used by	Elements tns:TXB, tns:TXBRequest
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit
Children	transOrigID, transOrigSignatur, transOriginalZeit, txbase
Source	<pre><xs:complexType name="TXB_Type"> <xs:annotation> <xs:documentation>Typ: Bestaetigung einer ION-Transaktion</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_RET_Type" /> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXAS_Type

Namespace	http://vdv/ka/ion/2				
Annotations	Typ: Aufforderung zum Senden				
Diagram					
Type	extension of tns:TX_BASE_Type				
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAS_Type 				
Used by	<table> <tr> <td>Complex Types</td><td>tns:TXASBER_Type, tns:TXASKON_Type</td></tr> <tr> <td>Element</td><td>tns:TXAS</td></tr> </table>	Complex Types	tns:TXASBER_Type, tns:TXASKON_Type	Element	tns:TXAS
Complex Types	tns:TXASBER_Type, tns:TXASKON_Type				
Element	tns:TXAS				
Model	txbase , transSendeAuftrag , transSendeAuftragstyp				
Children	transSendeAuftrag, transSendeAuftragstyp, txbase				
Source	<pre><xs:complexType name="TXAS_Type"> <xs:annotation> <xs:documentation>Typ: Aufforderung zum Senden</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:element name="transSendeAuftrag"> <xs:simpleType> <xs:restriction base="tns:PrintableString"> <xs:minLength value="0" /> <xs:maxLength value="10" /> </xs:restriction> </xs:simpleType> </xs:element> <!-- TODO Wilk Hoffmann: Wenn dann bitte mit Aufzaehlung (verschoben bis stabil)--> <xs:element name="transSendeAuftragstyp" type="tns:AuftragsTyp_CODE" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Complex Type tns:TXDEABER_Req_Type

Namespace	http://vdv/ka/ion/2
-----------	---------------------

Annotations	Typ: Dienstanfrage "Entfernen einer Produkt Akzeptanz fuer alle Organisationen"
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXDEABER_Req_Type
Used by	Element tns:TXDEABER
Model	txbase , prodAkzeptanzEnde , prodProdukt_ID
Children	prodAkzeptanzEnde, prodProdukt_ID, txbase
Source	<pre> <xs:complexType name="TXDEABER_Req_Type"> <xs:annotation> <xs:documentation>Typ: Dienstanfrage "Entfernen einer Produkt Akzeptanz fuer alle Organisationen"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:element name="prodAkzeptanzEnde" type="ct:Date"/> <xs:element name="prodProdukt_ID" type="tns:EFMPprodukt_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSMITA_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperrmitteilung Applikation
Diagram	
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SMIT_Type • tns:TXSMITA_Type
Used by	Complex Type tns:TXSFREIMITA_Type Element tns:TXSMITA
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , appSperrkandidat
Children	appSperrkandidat, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre> <xs:complexType name="TXSMITA_Type"> <xs:annotation> <xs:documentation>Typ: Sperrmitteilung Applikation</xs:documentation> </xs:annotation> <xs:complexContent> </pre>

	<pre> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="appSperrkandidat" type="tns:NmApplikationInstanz_ID_Type" nillable="false" /> </xs:sequence> </xs:extension> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSFREIMITA_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperrfreigabemitteilung Applikation
Diagram	
Type	extension of tns:TXSMITA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITA_Type tns:TXSFREIMITA_Type
Used by	Element tns:TXSFREIMITA
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , appSperrkandidat
Children	appSperrkandidat, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre> <xs:complexType name="TXSFREIMITA_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung Applikation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXSMITA_Type" /> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSANFSYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperranforderung fuer einen symmetrischen Schluessel
Diagram	

Type	extension of tns:TX_SANF_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFSYMK_Type
Used by	Complex Type tns:TXSAANFSYMK_Type
	Element tns:TXSANFSYMK
Model	txbase , sperrSperrgrund , keySperrkandidatsym
Children	keySperrkandidatsym, sperrSperrgrund, txbase
Source	<pre><xs:complexType name="TXSANFSYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperranforderung fuer einen symmetrischen Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SANF_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSANFASYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperranforderung fuer einen asymmetrischen Schluessel
Diagram	
Type	extension of tns:TX_SANF_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFASYMK_Type
Used by	Complex Type tns:TXSAANFASYMK_Type
	Element tns:TXSANFASYMK
Model	txbase , sperrSperrgrund , keySperrkandidatasym
Children	keySperrkandidatasym, sperrSperrgrund, txbase
Source	<pre><xs:complexType name="TXSANFASYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperranforderung fuer einen asymmetrischen Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SANF_Type"> <xs:sequence> <xs:element name="keySperrkandidatasym" type="tns:ASymSchluessel_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSAANFSYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperraufhebungsanforderung fuer einen symmetrischen Schluessel
Diagram	
Type	extension of tns:TXSANFSYMK_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SANF_Type • tns:TXSANFSYMK_Type • tns:TXSAANFSYMK_Type
Used by	Element tns:TXSAANFSYMK
Model	txbase , sperrSperrgrund , keySperrkandidatsym
Children	keySperrkandidatsym, sperrSperrgrund, txbase
Source	<pre> <xs:complexType name="TXSAANFSYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperraufhebungsanforderung fuer einen symmetrischen Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXSANFSYMK_Type" /> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSAANFASYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperraufhebungsanforderung fuer einen asymmetrischen Schluessel
Diagram	
Type	extension of tns:TXSANFASYMK_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SANF_Type • tns:TXSANFASYMK_Type • tns:TXSAANFASYMK_Type

Used by	Element tns:TXSAANFASYMK
Model	txbase , sperrSperrgrund , keySperrkandidatsym
Children	keySperrkandidatsym, sperrSperrgrund, txbase
Source	<pre><xs:complexType name="TXSAANFASYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperraufhebungsanforderung fuer einen asymmetrischen Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXSANFASYMK_Type"/> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSFREIMITSYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperrfreigabemitteilung symmetrischer Schluessel
Diagram	
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITSYMK_Type
Used by	Element tns:TXSFREIMITSYMK
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym
Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre><xs:complexType name="TXSFREIMITSYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung symmetrischer Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSFREIMITASYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperrfreigabemitteilung asymmetrischer Schluessel

Diagram	
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SMIT_Type • tns:TXSFREIMITASYMK_Type
Used by	Element tns:TXSFREIMITASYMK
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatasy
Children	keySperrkandidatasy, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre> <xs:complexType name="TXSFREIMITASYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung asymmetrischer Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="keySperrkandidatasy" type="tns:ASymSchluessel_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSMITSYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperrmitteilung symmetrischer Schuessel
Diagram	
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SMIT_Type • tns:TXSMITSYMK_Type
Used by	Element tns:TXSMITSYMK
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatasy
Children	keySperrkandidatasy, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre> <xs:complexType name="TXSMITSYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperrmitteilung symmetrischer Schuessel</xs:documentation> </xs:annotation> </pre>

	<pre> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSMITASYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperrmitteilung asymmetrischer Schuessel
Diagram	
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITASYMK_Type
Used by	Element tns:TXSMITASYMK
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym
Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre> <xs:complexType name="TXSMITASYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperrmitteilung asymmetrischer Schuessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:ASymSchluessel_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSNAWA_Req_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Dienstanfrage "Sperrnachweis Applikation"

Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXSNAWA_Req_Type
Used by	Element tns:TXSNAWA
Model	txbase , (samSperrkandidat orgSperrkandidat) , zyklusNummer , sperrrtransaktionApplikation , appNmTransaktionMAC
Children	appNmTransaktionMAC, orgSperrkandidat, samSperrkandidat, sperrrtransaktionApplikation, txbase, zyklusNummer
Source	<pre> <xs:complexType name="TXSNAWA_Req_Type"> <xs:annotation> <xs:documentation>Typ: Dienstanfrage "Sperrnachweis Applikation"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:choice minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Wurde eine Applikation Aufgrund einer SAM bzw. Organisationssperre durchgefuehrt, so ist die SAM bzw. Org ID in dem jeweiligen Element zu uebermitteln.</ xs:documentation> </xs:annotation> <xs:element name="samSperrkandidat" type="tns:SAM_ID_Type" /> <xs:element name="orgSperrkandidat" type="ka:Organisation_ID" /> </xs:choice> <xs:element name="zyklusNummer" type="tns:SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="sperrrtransaktionApplikation" type="tns:Transaktionsdatensatz_Type" /> <xs:element name="appNmTransaktionMAC" type="tns:appNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSNAWB_Req_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Dienstanfrage "Sperrnachweis Berechtigung"

Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXSNAWB_Req_Type
Used by	Element tns:TXSNAWB
Model	txbase , (samSperrkandidat orgSperrkandidat) , zyklusNummer , sperrtransaktionBerechtigung , berNmTransaktionMAC
Children	berNmTransaktionMAC, orgSperrkandidat, samSperrkandidat, sperrtransaktionBerechtigung, txbase, zyklusNummer
Source	<pre> <xs:complexType name="TXSNAWB_Req_Type"> <xs:annotation> <xs:documentation>Typ: Dienstanfrage "Sperrnachweis Berechtigung"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:choice minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Wurde eine Applikation Aufgrund einer SAM bzw. Organisationssperre durchgefuehrt, so ist die SAM bzw. Org ID in dem jeweiligen Element zu uebermitteln.</xs:documentation> </xs:annotation> <xs:element name="samSperrkandidat" type="tns:SAM_ID_Type" /> <xs:element name="orgSperrkandidat" type="ka:Organisation_ID" /> </xs:choice> <xs:element name="zyklusNummer" type="tns:SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="sperrtransaktionBerechtigung" type="tns:Transaktionsdatensatz_Type" /> <xs:element name="berNmTransaktionMAC" type="tns:berNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Simple Type(s)

Simple Type tns:TransSignatur_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ fuer die Signatur auf der Transaktion (altes Verfahren)
Diagram	
Type	restriction of xs:hexBinary
Facets	length 128
Used by	Elements tns:ION_TX_HEADER_Type/transSignatur, tns:TX_RET_Type/transOrigSignatur
Source	<pre> <xs:simpleType name="TransSignatur_Type"> <xs:annotation> <xs:documentation>Typ fuer die Signatur auf der Transaktion (altes Verfahren)</xs:documentation> </xs:annotation> </pre>


	<pre><xs:restriction base="xs:hexBinary"> <xs:length value="128" fixed="true"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Simple Type tns:Abrechnungsverfahren_CODE_Type


Namespace	http://vdv/ka/ion/2		
Annotations	Der Abrechnungsverfahren_CODE klassifiziert das Verfahren der Fahrpreisabrechnung.		
Diagram			
Type	restriction of tns:INT1		
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:Abrechnungsverfahren_CODE_Type		
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Keine Angabe
	enumeration	1	Pre-Paid
	enumeration	2	Post-Paid
	enumeration	3	Trip-Paid
Used by	Elements	tns:TXANLN_Type/tns:prodAbrechnungsverfahren, tns:TXAUSEFS_Type/tns:prodAbrechnungsverfahren, tns:TX_BER_Type/prodAbrechnungsverfahren	
Source	<pre><xs:simpleType name="Abrechnungsverfahren_CODE_Type"> <xs:annotation> <xs:documentation>Der Abrechnungsverfahren_CODE klassifiziert das Verfahren der Fahrpreisabrechnung.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Keine Angabe</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Pre-Paid</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Post-Paid</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Trip-Paid</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd		

Simple Type tns:Bezahlart_CODE_Type


Namespace	http://vdv/ka/ion/2
Annotations	<p>Der Bezahlart_CODE klassifiziert Arten der Bezahlung (von Wertobjekten der Kernapplikation).</p> <p>Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschränkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software</p>

	mit Hilfe der Aufzaehlung BezahlartEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden.					
Diagram						
Type	tns:INT1					
Type hierarchy	<ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:Bezahlart_CODE_Type					
Facets	<table><tr><td>maxInclusive</td><td>255</td></tr><tr><td>minInclusive</td><td>0</td></tr></table>		maxInclusive	255	minInclusive	0
maxInclusive	255					
minInclusive	0					
Used by	Elements	tns:TXANLN_Type/tns:berBezahlArt, tns:TXAUSEFS_Type/tns:berBezahlArt, tns:TX_BER_Type/berBezahlArt				
Source	<pre><xs:simpleType name="Bezahlart_CODE_Type"> <xs:annotation> <xs:documentation>Der BezahlArt_CODE klassifiziert Arten der Bezahlung (von Wertobjekten der Kernapplikation). Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung BezahlartEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1" /> </xs:simpleType></pre>					
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd					

Simple Type tns:PrintableString

Namespace	http://vdv/ka/ion/2	
Diagram		
Type	restriction of xs:string	
Facets	pattern	[-p] *
Used by	Element	tns:TXAS_Type/transSendeAuftrag
Source	<pre><xs:simpleType name="PrintableString"> <xs:restriction base="xs:string"> <xs:pattern value="[-p]*" /> </xs:restriction> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd	

Simple Type tns:CommonServiceResultCode

Namespace	http://vdv/ka/ion/2	
Annotations	Dienstuebergreifende Ergebniscodes. In BOM Ablehnungstyp_Code bis auf Fall "0". Dieser Typ ist nicht direkt eingebunden und dient der Vollstaendigkeit der Schnittstelle.	
Diagram		
Type	restriction of tns:INT1	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:CommonServiceResultCode 	
Facets	maxInclusive	255
	minInclusive	0
	enumeration	2 Daten des SOAP Headers stimmen nicht mit den Transaktionsdaten der fachlichen Nachricht ueberein.
	enumeration	3 Falsche Senderrolle

	enumeration	4	Organisations-ID des Senders ist unbekannt
	enumeration	5	Die Organisation wurde durch den AH gesperrt
	enumeration	8	Transaktion betrifft gesperrtes Objekt
	enumeration	9	Falsche Referenz
	enumeration	254	Service/Transaktion wird nicht unterstuetzt
Source	<pre> <xs:simpleType name="CommonServiceResultCode"> <xs:annotation> <xs:documentation>Dienstuebergreifende ErgebnisCodes. In BOM Ablehnungstype_Code bis auf Fall "0". Dieser Typ ist nicht direkt eingebunden und dient der Vollstaendigkeit der Schnittstelle.</ </xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <!-- <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Erfolgreich</ </xs:documentation> </xs:annotation> </xs:enumeration> --> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Daten des SOAP Headers stimmen nicht mit den Transaktionsdaten der fachlichen Nachricht ueberein.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Falsche Senderrolle</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation>Organisations-ID des Senders ist unbekannt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>Die Organisation wurde durch den AH gesperrt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="8"> <xs:annotation> <xs:documentation>Transaktion betrifft gesperrtes Objekt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="9"> <xs:annotation> <xs:documentation>Falsche Referenz</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="254"> <xs:annotation> <xs:documentation>Service/Transaktion wird nicht unterstuetzt</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>		
Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ ion/2/XML-Schema_ION.xsd		

Simple Type tns:NmTransaktionsTyp_CODE

Namespace	http://vdv/ka/ion/2				
Annotations	Der NmTransaktionstyp_CODE klassifiziert Arten von Transaktionen, die mit Wertobjekten auf dem Nutzermedium auftreten				
Diagram					
Type	restriction of tns:INT1				
Type hierar- chy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:NmTransaktionsTyp_CODE 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				

	enumeration	0	Keine Angabe
	enumeration	1	Ausgabetransaktion - Applikation oder Berechtigung
	enumeration	2	Entwertung
	enumeration	11	CI
	enumeration	12	CO
	enumeration	15	Einzahlung - Berechtigung
	enumeration	16	CI nach Fahrtfortsetzung
	enumeration	18	NTP Aendern
	enumeration	20	Sperrtransaktion Applikation oder Berechtigung
	enumeration	21	Entsperrtransaktion Applikation oder Berechtigung
	enumeration	22	BI
	enumeration	23	BO
	enumeration	24	INOUT
	enumeration	25	Rueckgabetransaktion - Applikation oder Berechtigung
	enumeration	27	Kontrolle
	enumeration	28	Belastungstransaktion - Berechtigung und Gutschriften bei Rueckzahlung (POB/PEB/WEB)
	enumeration	29	Belastungstransaktion WEB mit Autoload
	enumeration	30	WEB Buchung(Laden/Entladen)
	enumeration	31	WEB-CI mit Autoload
	enumeration	32	WEB-CO mit Autoload
	enumeration	33	Kontrolle nach CI; BIBO oder Entwertung
	enumeration	34	Check personal (CPKontrolldatensatz fuer Kontrollterminal)
	enumeration	35	Auto CO
	enumeration	36	manuelles CO (nachtraeglich durch den Nutzer)
	enumeration	37	Ausgabe EFS ueber Aktionsliste
	enumeration	38	Entsperrtransaktion EFS ueber Aktionsliste
	enumeration	39	Rückgabetransaktion EFS ueber Aktionsliste
Used by	Element	tns:TX_LOG_Type/tns:logTransaktionsTyp_ID	
Source	<pre><xs:simpleType name="NmTransaktionsTyp_CODE"> <xs:annotation> <xs:documentation>Der NmTransaktionstyp_CODE klassifiziert Arten von Transaktionen, die mit Wertobjekten auf dem Nutzermedium auftreten</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Keine Angabe</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Ausgabetransaktion - Applikation oder Berechtigung</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Entwertung</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="11"> <xs:annotation> <xs:documentation>CI</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="12"> <xs:annotation> <xs:documentation>CO</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>		

```
<xs:enumeration value="15">
  <xs:annotation>
    <xs:documentation>Einzahlung - Berechtigung</xs:documentation>
  </xs:annotation>
</xs:enumeration>
<xs:enumeration value="16">
  <xs:annotation>
    <xs:documentation>CI nach Fahrtfortsetzung</xs:documentation>
  </xs:annotation>
</xs:enumeration>
<xs:enumeration value="18">
  <xs:annotation>
    <xs:documentation>NTP Aendern</xs:documentation>
  </xs:annotation>
</xs:enumeration>
<xs:enumeration value="20">
  <xs:annotation>
    <xs:documentation>Sperctransaktion Applikation oder Berechtigung</xs:documentation>
  </xs:annotation>
</xs:enumeration>
<xs:enumeration value="21">
  <xs:annotation>
    <xs:documentation>Entsperctransaktion Applikation oder Berechtigung</xs:documentation>
  </xs:annotation>
</xs:enumeration>
<xs:enumeration value="22">
  <xs:annotation>
    <xs:documentation>BI</xs:documentation>
  </xs:annotation>
</xs:enumeration>
<xs:enumeration value="23">
  <xs:annotation>
    <xs:documentation>BO</xs:documentation>
  </xs:annotation>
</xs:enumeration>
<xs:enumeration value="24">
  <xs:annotation>
    <xs:documentation>INOUT</xs:documentation>
  </xs:annotation>
</xs:enumeration>
<xs:enumeration value="25">
  <xs:annotation>
    <xs:documentation>Rueckgabetransaktion - Applikation oder Berechtigung</xs:documentation>
  </xs:annotation>
</xs:enumeration>
<xs:enumeration value="27">
  <xs:annotation>
    <xs:documentation>Kontrolle</xs:documentation>
  </xs:annotation>
</xs:enumeration>
<xs:enumeration value="28">
  <xs:annotation>
    <xs:documentation>Belastungstransaktion - Berechtigung und Gutschriften bei Rueckzahlung
(POB/PEB/WEB)</xs:documentation>
  </xs:annotation>
</xs:enumeration>
<xs:enumeration value="29">
  <xs:annotation>
    <xs:documentation>Belastungstransaktion WEB mit Autoload</xs:documentation>
  </xs:annotation>
</xs:enumeration>
<xs:enumeration value="30">
  <xs:annotation>
    <xs:documentation>WEB Buchung(Laden/Entladen)</xs:documentation>
  </xs:annotation>
</xs:enumeration>
<xs:enumeration value="31">
  <xs:annotation>
    <xs:documentation>WEB-CI mit Autoload</xs:documentation>
  </xs:annotation>
</xs:enumeration>
<xs:enumeration value="32">
  <xs:annotation>
    <xs:documentation>WEB-CO mit Autoload</xs:documentation>
  </xs:annotation>
</xs:enumeration>
<xs:enumeration value="33">
  <xs:annotation>
    <xs:documentation>Kontrolle nach CI; BIBO oder Entwertung</xs:documentation>
  </xs:annotation>
</xs:enumeration>
<xs:enumeration value="34">
  <xs:annotation>
```



	<pre> <xs:documentation>Check personal (CPKontrolldatensatz fuer Kontrollterminal)</ xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="35"> <xs:annotation> <xs:documentation>Auto CO</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="36"> <xs:annotation> <xs:documentation>manuelles CO (nachtraeglich durch den Nutzer)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="37"> <xs:annotation> <xs:documentation>Ausgabe EFS ueber Aktionsliste</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="38"> <xs:annotation> <xs:documentation>Entsperrtransaktion EFS ueber Aktionsliste</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="39"> <xs:annotation> <xs:documentation>Rückgabetransaktion EFS ueber Aktionsliste</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Simple Type `tns:OrtsTyp_CODE_Type`


Namespace	http://vdv/ka/ion/2				
Annotations	Classifies locations, see Spec BOM, table 6-69. Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung OrtsTypeEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden.				
Diagram					
Type	tns:INT1				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:OrtsTyp_CODE_Type 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	Element <code>tns:Ort_ID_Type/ortTyp</code>				
Source	<pre> <xs:simpleType name="OrtsTyp_CODE_Type"> <xs:annotation> <xs:documentation>Classifies locations, see Spec BOM, table 6-69. Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung OrtsTypeEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"/> </xs:simpleType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Simple Type `tns:AuftragsTyp_CODE`


Namespace	http://vdv/ka/ion/2
Annotations	Der Code des Auftrages als Aufzaehlung.

Diagram					
Type	tns:INT1				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:AuftragsTyp_CODE 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	Element tns:TXAS_Type/transSendeAuftragstyp				
Source	<pre><xs:simpleType name="AuftragsTyp_CODE"> <xs:annotation> <xs:documentation>Der Code des Auftrages als Aufzaehlung.</xs:documentation> </xs:annotation> <!-- TODO: bitte als Aufzaehlung!!! --> <xs:restriction base="ct:INT1"/> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Simple Type tns:TerminalTyp_CODE_Type

Namespace	http://vdv/ka/ion/2				
Annotations	<p>Classifies terminals. From EN 1545: DeviceTypeCode. See Spec BOM table 6-85. Der TerminalTyp_CODE klassifiziert Terminals. Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung TerminalTypeEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden.</p>				
Diagram					
Type	tns:INT1				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:TerminalTyp_CODE_Type 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	Element tns:Terminal_ID_Type/terminalTyp				
Source	<pre><xs:simpleType name="TerminalTyp_CODE_Type"> <xs:annotation> <xs:documentation>Classifies terminals. From EN 1545: DeviceTypeCode. See Spec BOM table 6-85. Der TerminalTyp_CODE klassifiziert Terminals. Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung TerminalTypeEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"/> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Simple Type tns:SAM_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Type: Eindeutiger Identifizierer eines Secure Application Module (SAM)
Diagram	
Type	tns:ReferenceNumberThree

Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT3 • tns:ReferenceNumberThree • tns:SAM_ID_Type 				
Facets	<table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Used by	Elements tns:NmTransaktion_ID_Type/tns:SAM_ID.samNummer, tns:TXASKON_Type/tns:samSAM_ID, tns:TXSFREIMITS_Type/tns:samSperrkandidat, tns:TXSMITS_Type/tns:samSperrkandidat, tns:TXSNAWA_Req_Type/samSperrkandidat, tns:TXSNAWB_Req_Type/samSperrkandidat, tns:TXUEBERKON_Type/tns:samSAM_ID				
Source	<pre><xs:simpleType name="SAM_ID_Type"> <xs:annotation> <xs:documentation>Type: Eindeutiger Identifizierer eines Secure Application Module (SAM)</xs:documentation> </xs:annotation> <xs:restriction base="ct:ReferenceNumberThree"/> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Simple Type tns:Mitteilung_CODE_Type

Namespace	http://vdv/ka/ion/2								
Annotations	Typ: Mitteilung Codes BOM 6_40								
Diagram									
Type	restriction of xs:unsignedInt								
Facets	<table> <tr> <td>enumeration</td><td>1</td></tr> <tr> <td>enumeration</td><td>2</td></tr> <tr> <td>enumeration</td><td>3</td></tr> <tr> <td>enumeration</td><td>4</td></tr> </table>	enumeration	1	enumeration	2	enumeration	3	enumeration	4
enumeration	1								
enumeration	2								
enumeration	3								
enumeration	4								
Used by	Element tns:TX_SMIT_Type/sperrEntscheidung								
Source	<pre><xs:simpleType name="Mitteilung_CODE_Type"> <xs:annotation> <xs:documentation>Typ: Mitteilung Codes BOM 6_40</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:enumeration value="1"/> <xs:enumeration value="2"/> <xs:enumeration value="3"/> <xs:enumeration value="4"/> </xs:restriction> </xs:simpleType></pre>								
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd								

Simple Type tns:SperrlistenZyklusNummer_Type

Namespace	http://vdv/ka/ion/2
Annotations	<p>Die sperrlistenZyklusNummer ist eine streng Monoton aufsteigende Sequenznummer.</p> <p>Sie wird in einem festen konfigurierbaren Turnus zu einem bestimmten Zeitpunkt inkrementiert (z.B. 1 mal taeglich um 1:00 Uhr).</p> <p>Zu einer SperrlistenZyklusNummer werden alle Sperrobjektzustaende, die zu diesem Zeitpunkt im Kose System erfasst wurden, assoziiert.</p> <p>Sie gilt Systemweit und ist nicht an Organisationen oder Rollen gebunden.</p> <p>Wird eine Differenzsperrliste unter Angabe der sperrlistenZyklusNummer angefordert, so werden alle Sperrobjektaenderungen zwischen dieser ZyklusNummer und der aktuellen ZyklusNummer uebertragen.</p>
Diagram	

Type	tns:INT4				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SperrlistenZyklusNummer_Type 				
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Used by	Elements tns:TXSNAWA_Req_Type/zyklusNummer, tns:TXSNAWB_Req_Type/zyklusNummer				
Source	<pre><xs:simpleType name="SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die sperrlistenZyklusNummer ist eine streng Monoton aufsteigende Sequenznummer. Sie wird in einem festen konfigurierbaren Turnus zu einem bestimmten Zeitpunkt inkrementiert (z.B. 1 mal taeglich um 1:00 Uhr). Zu einer SperrlistenZyklusNummer werden alle Sperrobjektzustaende, die zu diesem Zeitpunkt im Kose System erfasst wurden, assoziiert. Sie gilt Systemweit und ist nicht an Organisationen oder Rollen gebunden. Wird eine Differenzsperrliste unter Angabe der sperrlistenZyklusNummer angefordert, so werden alle Sperrobjektaenderungen zwischen dieser ZyklusNummer und der aktuellen ZyklusNummer uebertragen.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT4"/> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Namespace: "http://vdv/ka/common/types/2"

Schema(s)

Imported schema XML-Schema_Common_Types.xsd

Namespace	http://vdv/ka/common/types/2						
Properties	<table> <tr> <td>attribute form default:</td><td>unqualified</td></tr> <tr> <td>element form default:</td><td>unqualified</td></tr> <tr> <td>version:</td><td>1.11.1</td></tr> </table>	attribute form default:	unqualified	element form default:	unqualified	version:	1.11.1
attribute form default:	unqualified						
element form default:	unqualified						
version:	1.11.1						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd						

Simple Type(s)

Simple Type tns:ReferenceNumberTwo

Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum von zwei Bytes umfasst				
Diagram					
Type	tns:INT2				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo 				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Used by	<table> <tr> <td>Simple Type</td><td>tns:Organisation_ID</td></tr> <tr> <td>Elements</td><td>tns:AllgemeineTransaktionsdaten/tns:logTransaktionsOperator_ID, tns:EFMProdukt_ID_Type/produktNummer, tns:Linie_ID_Type/tns:linienNummer, tns:SymSchluessel_ID_Type/schluesselInhaber_ID, tns:TXKNAWA_Type/tns:logTransaktionsOperator_ID, tns:TXKNAWB_Type/tns:logTransaktionsOperator_ID, tns:Terminal_ID_Type/terminalNummer</td></tr> </table>	Simple Type	tns:Organisation_ID	Elements	tns:AllgemeineTransaktionsdaten/tns:logTransaktionsOperator_ID, tns:EFMProdukt_ID_Type/produktNummer, tns:Linie_ID_Type/tns:linienNummer, tns:SymSchluessel_ID_Type/schluesselInhaber_ID, tns:TXKNAWA_Type/tns:logTransaktionsOperator_ID, tns:TXKNAWB_Type/tns:logTransaktionsOperator_ID, tns:Terminal_ID_Type/terminalNummer
Simple Type	tns:Organisation_ID				
Elements	tns:AllgemeineTransaktionsdaten/tns:logTransaktionsOperator_ID, tns:EFMProdukt_ID_Type/produktNummer, tns:Linie_ID_Type/tns:linienNummer, tns:SymSchluessel_ID_Type/schluesselInhaber_ID, tns:TXKNAWA_Type/tns:logTransaktionsOperator_ID, tns:TXKNAWB_Type/tns:logTransaktionsOperator_ID, tns:Terminal_ID_Type/terminalNummer				
Source	<pre><xs:simpleType name="ReferenceNumberTwo"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von zwei Bytes umfasst</xs:documentation> </xs:annotation></pre>				

	<pre><xs:restriction base="tns:INT2"/> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type **tns:INT2**


Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum von zwei Bytes umfasst				
Diagram	<pre> graph LR INT2[INT2] --- restriction of unsignedInt[xs:unsignedInt] </pre>				
Type	restriction of xs:unsignedInt				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Used by	<table> <tr> <td>Simple Types</td><td>tns:Amount65535, tns:ReferenceNumberTwo, tns:SequenceNumberTwo</td></tr> <tr> <td>Element</td><td>tns:TX_PP_Type/tns:ppMehrwertsteuer</td></tr> </table>	Simple Types	tns:Amount65535, tns:ReferenceNumberTwo, tns:SequenceNumberTwo	Element	tns:TX_PP_Type/tns:ppMehrwertsteuer
Simple Types	tns:Amount65535, tns:ReferenceNumberTwo, tns:SequenceNumberTwo				
Element	tns:TX_PP_Type/tns:ppMehrwertsteuer				
Source	<pre><xs:simpleType name="INT2"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von zwei Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0"/> <xs:maxInclusive value="65535"/> </xs:restriction> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type **tns:INT1**


Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum eines Bytes umfasst				
Diagram	<pre> graph LR INT1[INT1] --- restriction of unsignedInt[xs:unsignedInt] </pre>				
Type	restriction of xs:unsignedInt				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	<table> <tr> <td>Simple Types</td><td>tns:Abrechnungsverfahren_CODE_Type, tns:AuftragsTyp_CODE, tns:Bezahlart_CODE_Type, tns:CommonServiceResultCode, tns:KommunikationsPartnerRolle, tns:Kundentyp_CODE_Type, tns:NmTransaktionsTyp_CODE, tns:OrtsTyp_CODE_Type, tns:Profil_CODE_Type, tns:ReferenceNumberOne, tns:SequenceNumberOne, tns:ServiceKlasseExtra_CODE_Type, tns:ServiceKlasse_CODE_Type, tns:StatusCode, tns:TerminalTyp_CODE_Type, tns:TransportTypeCode_CODE_Type, tns:Validation_CODE_Type</td></tr> <tr> <td>Elements</td><td>tns:AllgemeineTransaktionsdaten/tns:logTransaktionsTyp.code, tns:ION_TX_HEADER_Type/transSignaturTyp, tns:ION_TX_HEADER_Type/transStatus, tns:ION_TX_HEADER_Type/transTransaktionsTyp, tns:ION_TX_HEADER_Type/transWiederholungsZaehler, tns:Mitnahme_Type/tns:mitnahmeAnzahl, tns:SymSchluessel_ID_Type/schluesselNummer, tns:SymSchluessel_ID_Type/schluesselVersion, tns:TXA_Type/transAblehnungGrund, tns:TX_SANF_Type/sperrSperrgrund</td></tr> </table>	Simple Types	tns:Abrechnungsverfahren_CODE_Type, tns:AuftragsTyp_CODE, tns:Bezahlart_CODE_Type, tns:CommonServiceResultCode, tns:KommunikationsPartnerRolle, tns:Kundentyp_CODE_Type, tns:NmTransaktionsTyp_CODE, tns:OrtsTyp_CODE_Type, tns:Profil_CODE_Type, tns:ReferenceNumberOne, tns:SequenceNumberOne, tns:ServiceKlasseExtra_CODE_Type, tns:ServiceKlasse_CODE_Type, tns:StatusCode, tns:TerminalTyp_CODE_Type, tns:TransportTypeCode_CODE_Type, tns:Validation_CODE_Type	Elements	tns:AllgemeineTransaktionsdaten/tns:logTransaktionsTyp.code, tns:ION_TX_HEADER_Type/transSignaturTyp, tns:ION_TX_HEADER_Type/transStatus, tns:ION_TX_HEADER_Type/transTransaktionsTyp, tns:ION_TX_HEADER_Type/transWiederholungsZaehler, tns:Mitnahme_Type/tns:mitnahmeAnzahl, tns:SymSchluessel_ID_Type/schluesselNummer, tns:SymSchluessel_ID_Type/schluesselVersion, tns:TXA_Type/transAblehnungGrund, tns:TX_SANF_Type/sperrSperrgrund
Simple Types	tns:Abrechnungsverfahren_CODE_Type, tns:AuftragsTyp_CODE, tns:Bezahlart_CODE_Type, tns:CommonServiceResultCode, tns:KommunikationsPartnerRolle, tns:Kundentyp_CODE_Type, tns:NmTransaktionsTyp_CODE, tns:OrtsTyp_CODE_Type, tns:Profil_CODE_Type, tns:ReferenceNumberOne, tns:SequenceNumberOne, tns:ServiceKlasseExtra_CODE_Type, tns:ServiceKlasse_CODE_Type, tns:StatusCode, tns:TerminalTyp_CODE_Type, tns:TransportTypeCode_CODE_Type, tns:Validation_CODE_Type				
Elements	tns:AllgemeineTransaktionsdaten/tns:logTransaktionsTyp.code, tns:ION_TX_HEADER_Type/transSignaturTyp, tns:ION_TX_HEADER_Type/transStatus, tns:ION_TX_HEADER_Type/transTransaktionsTyp, tns:ION_TX_HEADER_Type/transWiederholungsZaehler, tns:Mitnahme_Type/tns:mitnahmeAnzahl, tns:SymSchluessel_ID_Type/schluesselNummer, tns:SymSchluessel_ID_Type/schluesselVersion, tns:TXA_Type/transAblehnungGrund, tns:TX_SANF_Type/sperrSperrgrund				
Source	<pre><xs:simpleType name="INT1"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum eines Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0"/> <xs:maxInclusive value="255"/> </xs:restriction> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type **tns:SequenceNumberFour**

Namespace	http://vdv/ka/common/types/2
-----------	------------------------------

Annotations	Integer der den positiven Zahlenraum von vier Bytes umfasst. Fachlich eine aufsteigende Sequenznummer.				
Diagram					
Type	tns:INT4				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SequenceNumberFour 				
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Used by	Elements tns:IONTransaktion_ID_Type/transSequenznummer, tns:NmTransaktion_ID_Type/tns:samSequenznummer				
Source	<pre><xs:simpleType name="SequenceNumberFour"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von vier Bytes umfasst. Fachlich eine aufsteigende Sequenznummer.</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT4" /> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type tns:INT4


Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum von vier Bytes umfasst				
Diagram					
Type	restriction of xs:unsignedInt				
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Used by	<table> <tr> <td>Simple Types</td><td>tns:ReferenceNumberFour, tns:SequenceNumberFour, tns:SperrlistenZyklusNummer_Type</td></tr> <tr> <td>Elements</td><td>tns:TXASKON_Type/tns:samLoadKeyZaehler, tns:TXASKON_Type/tns:samNutzungsLimitNeu, tns:TXUEBERKON_Type/tns:samLoadKeyZaehler, tns:TXUEBERKON_Type/tns:samNutzungsLimitGen</td></tr> </table>	Simple Types	tns:ReferenceNumberFour, tns:SequenceNumberFour, tns:SperrlistenZyklusNummer_Type	Elements	tns:TXASKON_Type/tns:samLoadKeyZaehler, tns:TXASKON_Type/tns:samNutzungsLimitNeu, tns:TXUEBERKON_Type/tns:samLoadKeyZaehler, tns:TXUEBERKON_Type/tns:samNutzungsLimitGen
Simple Types	tns:ReferenceNumberFour, tns:SequenceNumberFour, tns:SperrlistenZyklusNummer_Type				
Elements	tns:TXASKON_Type/tns:samLoadKeyZaehler, tns:TXASKON_Type/tns:samNutzungsLimitNeu, tns:TXUEBERKON_Type/tns:samLoadKeyZaehler, tns:TXUEBERKON_Type/tns:samNutzungsLimitGen				
Source	<pre><xs:simpleType name="INT4"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von vier Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0" /> <xs:maxInclusive value="4294967295" /> </xs:restriction> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type tns:DateTime


Namespace	http://vdv/ka/common/types/2				
Annotations	Datum mit Uhrzeit (nutzt den Standard)				
Diagram					
Type	xs:dateTime				
Used by	<table> <tr> <td>Element</td><td>tns:ION_TX_HEADER_Type/transTransaktionsZeitpunkt</td></tr> <tr> <td>Simple Type</td><td>tns:SelektionKriterien_Type</td></tr> </table>	Element	tns:ION_TX_HEADER_Type/transTransaktionsZeitpunkt	Simple Type	tns:SelektionKriterien_Type
Element	tns:ION_TX_HEADER_Type/transTransaktionsZeitpunkt				
Simple Type	tns:SelektionKriterien_Type				
Source	<pre><xs:simpleType name="DateTime"> <xs:annotation> <xs:documentation>Datum mit Uhrzeit (nutzt den Standard)</xs:documentation> </xs:annotation></pre>				

	<pre><xs:restriction base="xs:dateTime"/> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type **tns:BitString16**


Namespace	http://vdv/ka/common/types/2				
Annotations	String mit Laenge von 16 Zeichen, die nur "0" oder "1" enthalten duerfen				
Diagram					
Type	restriction of xs:string				
Facets	<table> <tr> <td>length</td><td>16</td></tr> <tr> <td>pattern</td><td> [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1] </td></tr> </table>	length	16	pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]
length	16				
pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]				
Used by	Element tns:ION_TX_HEADER_Type/transVersion				
Source	<pre><xs:simpleType name="BitString16"> <xs:annotation> <xs:documentation>String mit Laenge von 16 Zeichen, die nur "0" oder "1" enthalten duerfen</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="16" fixed="true"/> <xs:pattern value="[0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1]"/> </xs:restriction> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type **tns:DateTimeCompact**


Namespace	http://vdv/ka/common/types/2				
Annotations	<p>Datum mit Uhrzeit, nutzt den ISO Standard in XML, jedoch wird der Wertebereich eingeschaenkt, so dass ueber eine binaere Darstellung im Nutzermedium 4 Byte ausreichend sind.</p> <p>1990-01-01T:00:00:00 entspricht "keiner Angabe".</p> <p>Der erste gueltige Wert ist 1990-01-02T00:00:02, da angenommen wird, dass DateTimeCompact sich aus DateCompact und TimeCompact (siehe BOM Spez.) zusammensetzt.</p> <p>Achtung: es wird lokale Zeit verwendet (keine Zeitzonen) um ungueltige Werte bei Abschneiden einer Zeitzoneninformation zu vermeiden!</p>				
Diagram					
Type	restriction of xs:dateTime				
Facets	<table> <tr> <td>maxInclusive</td><td>2117-12-31T23:59:58</td></tr> <tr> <td>minInclusive</td><td>1990-01-01T00:00:00</td></tr> </table>	maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58				
minInclusive	1990-01-01T00:00:00				
Used by	Elements tns:AllgemeineTransaktionsdaten/tns:logTransaktionsZeitpunkt , tns:TXKNAWA_Type/tns:logTransaktionsZeitpunkt , tns:TXKNAWB_Type/tns:logTransaktionsZeitpunkt , tns:TX_BER_Type/berGueltigkeitsbeginn , tns:TX_BER_Type/berGueltigkeitsende , tns:TX_LOG_Type/tns:logTransaktionsZeitpunkt_ID				
Source	<pre><xs:simpleType name="DateTimeCompact"> <xs:annotation> <xs:documentation>Datum mit Uhrzeit, nutzt den ISO Standard in XML, jedoch wird der Wertebereich eingeschaenkt, so dass ueber eine binaere Darstellung im Nutzermedium 4 Byte ausreichend sind. 1990-01-01T:00:00:00 entspricht "keiner Angabe". Der erste gueltige Wert ist 1990-01-02T00:00:02, da angenommen wird, dass DateTimeCompact sich aus DateCompact und TimeCompact (siehe BOM Spez.) zusammensetzt. Achtung: es wird lokale Zeit verwendet (keine Zeitzonen) um ungueltige Werte bei Abschneiden einer Zeitzoneninformation zu vermeiden!</xs:documentation> </xs:annotation> <xs:restriction base="xs:dateTime"> <xs:minInclusive value="1990-01-01T00:00:00"/> <xs:maxInclusive value="2117-12-31T23:59:58"/> </xs:restriction> </xs:simpleType></pre>				

	<pre></xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd


Simple Type **tns:OctetString10**

Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 10 Byte (20 Zeichen)
Diagram	
Type	restriction of xs:hexBinary
Facets	length 10
Used by	Elements tns:TXADM_Type/tns:transMediennummer, tns:TXAUSEFS_Type/tns:berBezahlMittel, tns:TX_ABKEY_Type/tns:berAbleitungsdaten, tns:TX_BER_Type/berBezahlMittel
Source	<pre><xs:simpleType name="OctetString10"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 10 Byte (20 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="10" fixed="true"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type **tns:ReferenceNumberFour**

Namespace	http://vdv/ka/common/types/2
Annotations	Integer der den positiven Zahlenraum von vier Bytes umfasst
Diagram	
Type	tns:INT4
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:ReferenceNumberFour
Facets	maxInclusive 4294967295 minInclusive 0
Used by	Elements tns:Berechtigung_ID_Type/berechtigungNummer, tns:NmApplikationInstanz_ID_Type/NmAppInstanznummer, tns:TXTRANSABBRUCH_Type/tns:MKAH-PV-Nutzungszaehler, tns:TXTRANSABBRUCH_Type/tns:MKKVP-Nutzungszaehler
Source	<pre><xs:simpleType name="ReferenceNumberFour"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von vier Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT4"/> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type **tns:ReferenceNumberThree**

Namespace	http://vdv/ka/common/types/2
Annotations	Integer der den positiven Zahlenraum von drei Bytes umfasst
Diagram	
Type	tns:INT3
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3

	<ul style="list-style-type: none"> • tns:ReferenceNumberThree
Facets	maxInclusive 16777215
	minInclusive 0
Used by	Elements tns:Fahrt_ID_Type/tns:fahrtNummer, tns:Ort_ID_Type/ortNummer
	Simple Type tns:SAM_ID_Type
Source	<pre><xs:simpleType name="ReferenceNumberThree"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von drei Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT3"/> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type tns:INT3


Namespace	http://vdv/ka/common/types/2
Annotations	Integer der den positiven Zahlenraum von drei Bytes umfasst
Diagram	<pre>graph LR INT3[tns:INT3] --- restriction of unsignedInt[xs:unsignedInt]</pre>
Type	restriction of xs:unsignedInt
Facets	maxInclusive 16777215
	minInclusive 0
Used by	Simple Types tns:ReferenceNumberThree, tns:SequenceNumberThree
Source	<pre><xs:simpleType name="INT3"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von drei Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0"/> <xs:maxInclusive value="16777215"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type tns:OctetString12


Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 12 Byte (24 Zeichen)
Diagram	<pre>graph LR OctetString12[tns:OctetString12] --- restriction of hexBinary[xs:hexBinary]</pre>
Type	restriction of xs:hexBinary
Facets	length 12
Used by	Element tns:ASymSchluessel_ID_Type/signaturSchluessel
Source	<pre><xs:simpleType name="OctetString12"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 12 Byte (24 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="12" fixed="true"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type tns:OctetString8

Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 8 Byte (16 Zeichen)

Diagram	
Type	restriction of xs:hexBinary
Facets	length 8
Used by	Elements tns:appNmTransaktionMAC_Type/appMAC_AH, tns:appNmTransaktionMAC_Type/appMAC_KVP, tns:berNmTransaktionMAC_Type/berMAC_KVP, tns:berNmTransaktionMAC_Type/berMAC_PV
Source	<pre> <xs:simpleType name="OctetString8"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 8 Byte (16 Zeichen)</ </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="8" fixed="true"/> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd


Simple Type tns:Date

Namespace	http://vdv/ka/common/types/2
Annotations	Datum ohne Uhrzeit (nutzt den Standard)
Diagram	
Type	xs:date
Used by	Element tns:TXDEABER_Req_Type/prodAkzeptanzEnde
Source	<pre> <xs:simpleType name="Date"> <xs:annotation> <xs:documentation>Datum ohne Uhrzeit (nutzt den Standard)</xs:documentation> </xs:annotation> <xs:restriction base="xs:date"/> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type tns:BitString1


Namespace	http://vdv/ka/common/types/2
Annotations	String mit Laenge von 1 Zeichen, das nur "0" oder "1" enthalten darf
Diagram	
Type	restriction of xs:string
Facets	length 1 pattern [0-1]
Source	<pre> <xs:simpleType name="BitString1"> <xs:annotation> <xs:documentation>String mit Laenge von 1 Zeichen, das nur "0" oder "1" enthalten darf</ </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="1" fixed="true"/> <xs:pattern value="[0-1]"/> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type tns:BitString8


Namespace	http://vdv/ka/common/types/2
Annotations	String mit Laenge von 8 Zeichen, die nur "0" oder "1" enthalten duerfen
Diagram	

Type	restriction of xs:string
Facets	length 8
	pattern [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1]
Source	<pre><xs:simpleType name="BitString8"> <xs:annotation> <xs:documentation>String mit Laenge von 8 Zeichen, die nur "0" oder "1" enthalten duerfen</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="8" fixed="true"/> <xs:pattern value="[0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1]"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type tns:DateCompact

Namespace	http://vdv/ka/common/types/2
Annotations	Datum ohne Uhrzeit, nutzt den ISO Standard in XML, jedoch wird der Wertebereich eingeschaenkt, so dass ueber eine binaere Darstellung im Nutzermedium 2 Byte ausreichend sind. 1990-01-01 entspricht "keiner Angabe". Der erste gueltige Wert ist 1990-01-02 (siehe BOM Spez.).
Diagram	
Type	restriction of xs:date
Facets	maxInclusive 2117-12-31
	minInclusive 1990-01-01
Source	<pre><xs:simpleType name="DateCompact"> <xs:annotation> <xs:documentation>Datum ohne Uhrzeit, nutzt den ISO Standard in XML, jedoch wird der Wertebereich eingeschaenkt, so dass ueber eine binaere Darstellung im Nutzermedium 2 Byte ausreichend sind. 1990-01-01 entspricht "keiner Angabe". Der erste gueltige Wert ist 1990-01-02 (siehe BOM Spez.).</xs:documentation> </xs:annotation> <xs:restriction base="xs:date"> <xs:minInclusive value="1990-01-01"/> <xs:maxInclusive value="2117-12-31"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type tns:Datef

Namespace	http://vdv/ka/common/types/2
Annotations	BCD codierte Darstellung eines Datums als "Hexstring" in der Form yyyymmdd. "00000000" ist fuer "keine Angabe". Die Einschraenkung von 00010101 bis 99991231 wie in der BOM gefordert wird ueber das Pattern abgebildet.
Diagram	
Type	restriction of xs:string
Facets	length 8
	pattern [0-9][0-9][0-9][0-9][0-1] [0-9][0-3][0-9]
Source	<pre><xs:simpleType name="Datef"> <xs:annotation> <xs:documentation>BCD codierte Darstellung eines Datums als "Hexstring" in der Form yyyymmdd. "00000000" ist fuer "keine Angabe". Die Einschraenkung von 00010101 bis 99991231 wie in der BOM gefordert wird ueber das Pattern abgebildet.</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="8" fixed="true"/> <xs:pattern value="[0-9][0-9][0-9][0-9][0-1][0-9][0-3][0-9]"/> </xs:restriction> </xs:simpleType></pre>

	<pre></xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type `tns:OctetString1`

Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 1 Byte (2 Zeichen)
Diagram	<pre> graph LR OctetString1 -- restriction --> xs_hexBinary[xs:hexBinary] </pre>
Type	restriction of xs:hexBinary
Facets	length 1
Source	<pre><xs:simpleType name="OctetString1"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 1 Byte (2 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="1" fixed="true"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd


Simple Type `tns:OctetString4`

Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 4 Byte (8 Zeichen)
Diagram	<pre> graph LR OctetString4 -- restriction --> xs_hexBinary[xs:hexBinary] </pre>
Type	restriction of xs:hexBinary
Facets	length 4
Used by	Element <code>tns:TX_AFBLOG_Type/tns:afbLogDynamischerRabattParameter</code>
Source	<pre><xs:simpleType name="OctetString4"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 4 Byte (8 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="4" fixed="true"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd


Simple Type `tns:OctetString128`

Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 128 Byte (256 Zeichen)
Diagram	<pre> graph LR OctetString128 -- restriction --> xs_hexBinary[xs:hexBinary] </pre>
Type	restriction of xs:hexBinary
Facets	length 128
Source	<pre><xs:simpleType name="OctetString128"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 128 Byte (256 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="128" fixed="true"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd


Simple Type `tns:OctetString200`

Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 200 Byte (400 Zeichen)
Diagram	
Type	restriction of xs:hexBinary
Facets	length 200
Source	<pre><xs:simpleType name="OctetString200"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 200 Byte (400 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="200" fixed="true"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type `tns:ReferenceNumberOne`


Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum von einem Byte umfasst				
Diagram					
Type	tns:INT1				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:ReferenceNumberOne 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	Element tns:LinieVariante_ID_Type/tns:variantenNummer				
Source	<pre><xs:simpleType name="ReferenceNumberOne"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von einem Byte umfasst</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT1"/> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type `tns:SequenceNumberOne`


Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum von einem Byte umfasst Fachlich eine aufsteigende Sequenznummer.				
Diagram					
Type	tns:INT1				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:SequenceNumberOne 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<pre><xs:simpleType name="SequenceNumberOne"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von einem Byte umfasst Fachlich eine aufsteigende Sequenznummer.</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT1"/> </xs:simpleType></pre>				

	<pre> </xs:annotation> <xs:restriction base="tns:INT1" /> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type **tns:SequenceNumberTwo**

Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum von zwei Bytes umfasst Fachlich eine aufsteigende Sequenznummer.				
Diagram					
Type	tns:INT2				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:SequenceNumberTwo 				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Used by	Element tns:AllgemeineTransaktionsdaten/tns:logApplikationSeqNummer				
Source	<pre> <xs:simpleType name="SequenceNumberTwo"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von zwei Bytes umfasst Fachlich eine aufsteigende Sequenznummer.</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT2" /> </xs:simpleType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type **tns:SequenceNumberThree**

Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum von drei Bytes umfasst Fachlich eine aufsteigende Sequenznummer.				
Diagram					
Type	tns:INT3				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:SequenceNumberThree 				
Facets	<table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Source	<pre> <xs:simpleType name="SequenceNumberThree"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von drei Bytes umfasst Fachlich eine aufsteigende Sequenznummer.</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT3" /> </xs:simpleType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Namespace: "http://vdv/ka/common/2"

Schema(s)


Imported schema XML-Schema_KA_Common.xsd

Namespace	http://vdv/ka/common/2
-----------	------------------------

Properties	attribute form default: unqualified
	element form default: unqualified
	version: 1.11.1
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd


Element(s)

Element tns:VX

Namespace	http://vdv/ka/common/2
Annotations	KA VX Nachricht Eine VX Nachricht wird bei einer asynchronen Anwendungskommunikation als Bestaetigung einer Dienstanfrage gesendet. Durch die VX Nachricht wird dem anfragenden System der Status der iniitalen Datenuebermittlung mitgeteilt.
Diagram	
Type	tns:VX_Message_Type
Properties	content: complex
Model	StatusCode , StatusText
Children	StatusCode, StatusText
Instance	<pre><tns:VX xmlns:tns="http://vdv/ka/common/2"> <StatusCode>{1,1}</StatusCode> <StatusText>{1,1}</StatusText> </tns:VX></pre>
Source	<pre><xs:element name="VX" type="tns:VX_Message_Type"> <xs:annotation> <xs:documentation>KA VX Nachricht Eine VX Nachricht wird bei einer asynchronen Anwendungskommunikation als Bestaetigung einer Dienstanfrage gesendet. Durch die VX Nachricht wird dem anfragenden System der Status der iniitalen Datenuebermittlung mitgeteilt.</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd


Simple Type(s)

Simple Type tns:Organisation_ID

Namespace	http://vdv/ka/common/2
Annotations	Type: Eindeutiger Identifier einer Organisation
Diagram	
Type	tns:ReferenceNumberTwo
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID
Facets	maxInclusive 65535
	minInclusive 0
Used by	<p>Elements</p> <p>tns:Berechtigung_ID_Type/kvp_ID, tns:EFMProdukt_ID_Type/organisationID, tns:Fahrt_ID_Type/tns:fahrtBetreiber_ID, tns:IONTransaktion_ID_Type/transSender_ID, tns:ION_TX_HEAD-ER_Type/transEmpfaenger_ID, tns:Linie_ID_Type/tns:linieDomaene_ID, tns:NmApplikationInstanz_ID_Type/kvp_ID, tns:Ort_ID_Type/ortDomaene_ID, tns:TXSFREIMITO_Type/tns:orgSperrkandidat, tns:TXSMITO_Type/tns:orgSperrkandidat, tns:TXSNAWA_Req_Type/orgSperrkandidat,</p>


	tns:TXSNAWB_Req_Type/orgSperrkandidat, tns:TX_LOG_Type/tns:logTransaktionsoperator_ID, tns:Terminal_ID_Type/terminalOwner_ID
Source	<pre><xs:simpleType name="Organisation_ID"> <xs:annotation> <xs:documentation>Type: Eindeutiger Identifier einer Organisation</xs:documentation> </xs:annotation> <xs:restriction base="ct:ReferenceNumberTwo"/> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd

Simple Type tns:KommunikationsParterRolle

Namespace	http://vdv/ka/common/2																													
Annotations	Rolle des Kommunikationspartners: 1=KVP, 2=DL, 3=PV, 4=AH, 5=KOSES																													
Diagram																														
Type	restriction of tns:INT1																													
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:KommunikationsParterRolle																													
Facets	<table><tr><td>maxInclusive</td><td>255</td><td></td></tr><tr><td>minInclusive</td><td>0</td><td></td></tr><tr><td>enumeration</td><td>0</td><td>Unbekannt</td></tr><tr><td>enumeration</td><td>1</td><td>KVP</td></tr><tr><td>enumeration</td><td>2</td><td>DL</td></tr><tr><td>enumeration</td><td>3</td><td>PV</td></tr><tr><td>enumeration</td><td>4</td><td>AH</td></tr><tr><td>enumeration</td><td>5</td><td>KOSES</td></tr><tr><td>enumeration</td><td>254</td><td>ZVM</td></tr></table>			maxInclusive	255		minInclusive	0		enumeration	0	Unbekannt	enumeration	1	KVP	enumeration	2	DL	enumeration	3	PV	enumeration	4	AH	enumeration	5	KOSES	enumeration	254	ZVM
maxInclusive	255																													
minInclusive	0																													
enumeration	0	Unbekannt																												
enumeration	1	KVP																												
enumeration	2	DL																												
enumeration	3	PV																												
enumeration	4	AH																												
enumeration	5	KOSES																												
enumeration	254	ZVM																												
Used by	Elements	tns:IONTransaktion_ID_Type/transSenderRolle, tns:ION_TX_HEADER_Type/transEmpfaengerRolle																												
Source	<pre><xs:simpleType name="KommunikationsParterRolle"> <xs:annotation> <xs:documentation>Rolle des Kommunikationspartners: 1=KVP, 2=DL, 3=PV, 4=AH, 5=KOSES</ xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Unbekannt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>KVP</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>DL</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>PV</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation>AH</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>KOSES</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>																													


	<pre> <xs:enumeration value="254"> <xs:annotation> <xs:documentation>ZVM</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd

Simple Type tns:StatusCode

Namespace	http://vdv/ka/common/2		
Annotations	Status Codes einer KA VX Nachricht (Bestaetigung der ZVM fuer asynchrone Nachrichten)		
Diagram			
Type	restriction of tns:INT1		
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:StatusCode		
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Die Nachricht wurde erfolgreich entgegengenommen und alle notwendigen Informationen zur Weiterleitung liegen vor.
	enumeration	1	Ungueltige Nachricht. Die Sender ID oder die Routing Information kann nicht aus dem SOAP Header extrahiert werden.
	enumeration	2	Ungleiche Sender ID. Die Sender ID, die im SOAP Header uebertragen wurde passt nicht zu der Sender ID, die in der VM zum Zertifikat des Senders hinterlegt wurde.
	enumeration	3	Unbekannter oder gesperrter Empfaenger oder zu den Routing Informationen ist in der VM keine technische Empfaengeradresse hinterlegt.
	enumeration	4	Verbindungsproblem zum Empfaenger. Es konnte keine Verbindung zum Empfaenger aufgebaut werden.
	enumeration	5	Timeout. Der Empfaenger antwortet nicht in einer vorgegebenen Zeit.
	enumeration	6	Die asynchrone Nachricht kann nicht zwischengespeichert werden.
	enumeration	7	Die Organisations-ID des Senders ist gesperrt oder der Vermittlungsstelle nicht bekannt.
	enumeration	255	Technisches Problem. Es liegt ein technisches Problem vor. Die Nachricht konnte nicht erfolgreich entgegengenommen werden.
Used by	Element	tns:VX_Message_Type/StatusCode	
Source	<pre><xs:simpleType name="StatusCode"> <xs:annotation> <xs:documentation>Status Codes einer KA VX Nachricht (Bestaetigung der ZVM fuer asynchrone Nachrichten)</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Die Nachricht wurde erfolgreich entgegengenommen und alle notwendigen Informationen zur Weiterleitung liegen vor.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Ungueltige Nachricht. Die Sender ID oder die Routing Information kann nicht aus dem SOAP Header extrahiert werden.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation></pre>		

	<pre> <xs:documentation>Ungleiche Sender ID. Die Sender ID, die im SOAP Header uebertragen wurde passt nicht zu der Sender ID, die in der VM zum Zertifikat des Senders hinterlegt wurde.</ xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Unbekannter oder gesperrter Empfaenger oder zu den Routing Informationen ist in der VM keine technische Empfaengeradresse hinterlegt.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation>Verbindungsproblem zum Empfaenger. Es konnte keine Verbindung zum Empfaenger aufgebaut werden.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>Timeout. Der Empfaenger antwortet nicht in einer vorgegebenen Zeit.</ xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="6"> <xs:annotation> <xs:documentation>Die asynchrone Nachricht kann nicht zwischengespeichert werden.</ xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="7"> <xs:annotation> <xs:documentation>Die Organisations-ID des Senders ist gesperrt oder der Vermittlungsstelle nicht bekannt.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="255"> <xs:annotation> <xs:documentation>Technisches Problem. Es liegt ein technisches Problem vor. Die Nachricht konnte nicht erfolgreich entgegengenommen werden.</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ common/2/XML-Schema_KA_Common.xsd


Simple Type **tns:StatusText**

Namespace	http://vdv/ka/common/2
Annotations	Textuelle Beschreibung des "Status Codes" einer KA VX Nachricht
Diagram	
Type	restriction of xs:string
Facets	maxLength 255
Used by	Element tns:VX_Message_Type/StatusText
Source	<pre> <xs:simpleType name="StatusText"> <xs:annotation> <xs:documentation>Textuelle Beschreibung des "Status Codes" einer KA VX Nachricht</ xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </pre>
Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ common/2/XML-Schema_KA_Common.xsd

Complex Type(s)

Complex Type **tns:VX_Message_Type**

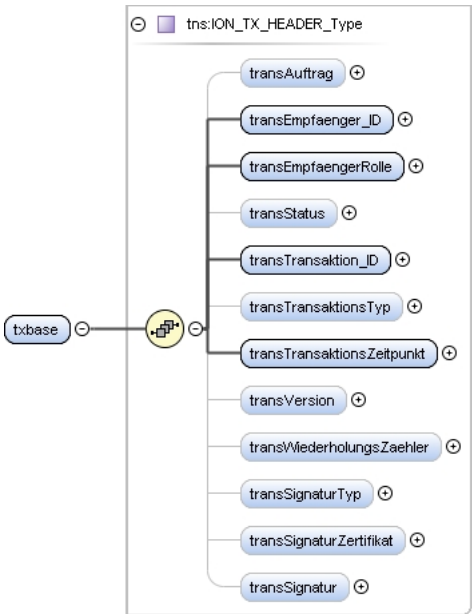
Namespace	http://vdv/ka/common/2
Annotations	Type: Struktur einer KA VX Nachricht (Bestaetigung der ZVM fuer asynchrone Nachrichten)

Diagram	
Used by	Element tns:VX
Model	StatusCode , StatusText
Children	StatusCode, StatusText
Source	<pre> <xs:complexType name="VX_Message_Type"> <xs:annotation> <xs:documentation>Type: Struktur einer KA VX Nachricht (Bestaetigung der ZVM fuer asynchrone Nachrichten)</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="StatusCode" type="tns:StatusCode" /> <xs:element name="StatusText" type="tns:StatusText" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd

Namespace: ""


Element(s)

Element tns:TX_BASE_Type / txbase


Namespace	No namespace
Annotations	Fachliche Daten ueber die in der Transaktion involvierten Systeme
Diagram	
Type	tns:ION_TX_HEADER_Type
Properties	content: complex
Model	transAuftrag{0,1} , transEmpfaenger_ID , transEmpfaengerRolle , transStatus{0,1} , transTransaktion_ID , transTransaktionsTyp{0,1} , transTransaktionsZeitpunkt , transVersion{0,1} , transWiederholungsZaehler{0,1} , transSignaturTyp{0,1} , transSignaturZertifikat{0,1} , transSignatur{0,1}
Children	transAuftrag, transEmpfaengerRolle, transEmpfaenger_ID, transSignatur, transSignaturTyp, transSignaturZertifikat, transStatus, transTransaktion_ID, transTransaktionsTyp, transTransaktionsZeitpunkt, transVersion, transWiederholungsZaehler
Instance	<pre> <txbase> <transAuftrag>{0,1}</transAuftrag> <transEmpfaenger_ID>{1,1}</transEmpfaenger_ID> <transEmpfaengerRolle>{1,1}</transEmpfaengerRolle> <transStatus>{0,1}</transStatus> <transTransaktion_ID>{1,1}</transTransaktion_ID> <transTransaktionsTyp>{0,1}</transTransaktionsTyp> </pre>

	<pre> <transTransaktionsZeitpunkt>{1,1}</transTransaktionsZeitpunkt> <transVersion>{0,1}</transVersion> <transWiederholungsZaehler>{0,1}</transWiederholungsZaehler> <transSignaturTyp>{0,1}</transSignaturTyp> <transSignaturZertifikat>{0,1}</transSignaturZertifikat> <transSignatur>{0,1}</transSignatur> </txbase> </pre>
Source	<pre> <xs:element name="txbase" type="tns:ION_TX_HEADER_Type"> <xs:annotation> <xs:documentation>Fachliche Daten ueber die in der Transaktion involvierten Systeme</ </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element tns:ION_TX_HEADER_Type / transAuftrag

Namespace	No namespace						
Diagram							
Type	xs:string						
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<pre> <xs:element name="transAuftrag" type="xs:string" minOccurs="0" maxOccurs="1"/> </pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element tns:ION_TX_HEADER_Type / transEmpfaenger_ID

Namespace	No namespace				
Annotations	Eindeutige OrganisationsId des Nachrichtenempfaengers				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> </table>	content:	simple		
content:	simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<pre> <xs:element name="transEmpfaenger_ID" type="ka:Organisation_ID"> <xs:annotation> <xs:documentation>Eindeutige OrganisationsId des Nachrichtenempfaengers</xs:documentation> </xs:annotation> </xs:element> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:ION_TX_HEADER_Type / transEmpfaengerRolle

Namespace	No namespace
Annotations	Rolle des Nachrichtenempfaengers
Diagram	
Type	tns:KommunikationsParterRolle
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt

	<ul style="list-style-type: none"> • tns:INT1 • tns:KommunikationsParterRolle
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
	enumeration 0 Unbekannt
	enumeration 1 KVP
	enumeration 2 DL
	enumeration 3 PV
	enumeration 4 AH
	enumeration 5 KOSES
	enumeration 254 ZVM
Source	<pre><xs:element name="transEmpfaengerRolle" type="ka:KommunikationsParterRolle"> <xs:annotation> <xs:documentation>Rolle des Nachrichtempfaengers</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:ION_TX_HEADER_Type / transStatus


Namespace	No namespace
Diagram	
Type	tns:INT1
Properties	content: simple
	minOccurs: 0
	maxOccurs: 1
Facets	maxInclusive 255
	minInclusive 0
Source	<pre><xs:element name="transStatus" type="ct:INT1" minOccurs="0" maxOccurs="1"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:ION_TX_HEADER_Type / transTransaktion_ID


Namespace	No namespace
Diagram	
Type	tns:IONTransaktion_ID_Type
Properties	content: complex
Model	transSequenznummer , transSenderRolle , transSender_ID
Children	transSenderRolle, transSender_ID, transSequenznummer
Instance	<pre><transTransaktion_ID> <transSequenznummer>{1,1}</transSequenznummer> <transSenderRolle>{1,1}</transSenderRolle> <transSender_ID>{1,1}</transSender_ID> </transTransaktion_ID></pre>
Source	<pre><xs:element name="transTransaktion_ID" type="tns:IONTransaktion_ID_Type"/></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd
-----------------	---


Element **tns:IONTransaktion_ID_Type** / **transSequenznummer**

Namespace	No namespace
Diagram	
Type	tns:SequenceNumberFour
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SequenceNumberFour
Properties	content: simple
Facets	maxInclusive 4294967295
	minInclusive 0
Source	<code><xs:element name="transSequenznummer" type="ct:SequenceNumberFour"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:IONTransaktion_ID_Type** / **transSenderRolle**

Namespace	No namespace
Diagram	
Type	tns:KommunikationsParterRolle
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:KommunikationsParterRolle
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
	enumeration 0 Unbekannt
	enumeration 1 KVP
	enumeration 2 DL
	enumeration 3 PV
	enumeration 4 AH
	enumeration 5 KOSES
	enumeration 254 ZVM
Source	<code><xs:element name="transSenderRolle" type="ka:KommunikationsParterRolle"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:IONTransaktion_ID_Type** / **transSender_ID**

Namespace	No namespace
Diagram	
Type	tns:Organisation_ID
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID

Properties	content:	simple
Facets	maxInclusive	65535
	minInclusive	0
Source	<xs:element name="transSender_ID" type="ka:Organisation_ID" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd	

Element tns:ION_TX_HEADER_Type / transTransaktionsTyp

Namespace	No namespace	
Diagram		
Type	tns:INT1	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	maxInclusive	255
	minInclusive	0
Source	<xs:element name="transTransaktionsTyp" type="ct:INT1" minOccurs="0" maxOccurs="1" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd	

Element tns:ION_TX_HEADER_Type / transTransaktionsZeitpunkt

Namespace	No namespace	
Annotations	Zeitpunkt der Dienstanfrage gemaess den Angaben der Dienstaufrufers. Achtung: Aufgrund von potentiell unsynchronisierten, lokalen Uhren der Kommunikationspartnern ist moeglicherweise die Aussagekraft dieses Feldes sehr gering.	
Diagram		
Type	tns:DateTime	
Properties	content:	simple
Source	<pre><xs:element name="transTransaktionsZeitpunkt" type="ct:DateTime"> <xs:annotation> <xs:documentation>Zeitpunkt der Dienstanfrage gemaess den Angaben der Dienstaufrufers. Achtung: Aufgrund von potentiell unsynchronisierten, lokalen Uhren der Kommunikationspartnern ist moeglicherweise die Aussagekraft dieses Feldes sehr gering.</xs:documentation> </xs:annotation> </xs:element></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd	

Element tns:ION_TX_HEADER_Type / transVersion

Namespace	No namespace	
Diagram		
Type	tns:BitString16	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	length	16
	pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]

Source	<code><xs:element name="transVersion" type="ct:BitString16" minOccurs="0" maxOccurs="1" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:ION_TX_HEADER_Type** / **transWiederholungsZaehler**

Namespace	No namespace						
Diagram							
Type	tns:INT1						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>maxInclusive</td><td>255</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0		
maxInclusive	255						
minInclusive	0						
Source	<code><xs:element name="transWiederholungsZaehler" type="ct:INT1" minOccurs="0" maxOccurs="1" /></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element **tns:ION_TX_HEADER_Type** / **transSignaturTyp**


Namespace	No namespace						
Diagram							
Type	tns:INT1						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>maxInclusive</td><td>255</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0		
maxInclusive	255						
minInclusive	0						
Source	<code><xs:element name="transSignaturTyp" type="ct:INT1" minOccurs="0" maxOccurs="1" /></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element **tns:ION_TX_HEADER_Type** / **transSignaturZertifikat**


Namespace	No namespace						
Diagram							
Type	restriction of xs:hexBinary						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>length</td><td>378</td></tr> </table>	length	378				
length	378						
Source	<pre> <xs:element name="transSignaturZertifikat" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:hexBinary"> <xs:length value="378" fixed="true"/> </xs:restriction> </xs:simpleType> </xs:element> </pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element **tns:ION_TX_HEADER_Type** / **transSignatur**


Namespace	No namespace
-----------	--------------

Diagram							
Type	tns:TransSignatur_Type						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>length</td><td>128</td></tr> </table>	length	128				
length	128						
Source	<code><xs:element name="transSignatur" minOccurs="0" maxOccurs="1" type="tns:TransSignatur_Type"/></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						


Element tns:TX_BER_Type / berGueltigkeitsbeginn

Namespace	No namespace				
Diagram					
Type	tns:DateTimeCompact				
Properties	<table> <tr><td>content:</td><td>simple</td></tr> </table>	content:	simple		
content:	simple				
Facets	<table> <tr><td>maxInclusive</td><td>2117-12-31T23:59:58</td></tr> <tr><td>minInclusive</td><td>1990-01-01T00:00:00</td></tr> </table>	maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58				
minInclusive	1990-01-01T00:00:00				
Source	<code><xs:element name="berGueltigkeitsbeginn" type="ct:DateTimeCompact"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TX_BER_Type / berGueltigkeitsende

Namespace	No namespace				
Diagram					
Type	tns:DateTimeCompact				
Properties	<table> <tr><td>content:</td><td>simple</td></tr> </table>	content:	simple		
content:	simple				
Facets	<table> <tr><td>maxInclusive</td><td>2117-12-31T23:59:58</td></tr> <tr><td>minInclusive</td><td>1990-01-01T00:00:00</td></tr> </table>	maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58				
minInclusive	1990-01-01T00:00:00				
Source	<code><xs:element name="berGueltigkeitsende" type="ct:DateTimeCompact"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TX_BER_Type / prodAbrechnungsVerfahren


Namespace	No namespace		
Diagram			
Type	tns:Abrechnungsverfahren_CODE_Type		
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:Abrechnungsverfahren_CODE_Type		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Keine Angabe
	enumeration	1	Pre-Paid
	enumeration	2	Post-Paid

	enumeration	3	Trip-Paid
Source	<xs:element name="prodAbrechnungsverfahren" type="tns:Abrechnungsverfahren_CODE_Type" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd		


Element tns:TX_BER_Type / berBezahlArt

Namespace	No namespace		
Diagram			
Type	tns:Bezahlart_CODE_Type		
Type hierarchy	<ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:Bezahlart_CODE_Type		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
Source	<xs:element name="berBezahlArt" type="tns:Bezahlart_CODE_Type" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd		

Element tns:TX_BER_Type / berBezahlMittel

Namespace	No namespace		
Diagram			
Type	tns:OctetString10		
Properties	content:	simple	
Facets	length	10	
Source	<xs:element name="berBezahlMittel" type="ct:OctetString10"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd		

Element tns:Berechtigung_ID_Type / berechtigungNummer


Namespace	No namespace		
Diagram			
Type	tns:ReferenceNumberFour		
Type hierarchy	<ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT4<ul style="list-style-type: none">• tns:ReferenceNumberFour		
Properties	content:	simple	
Facets	maxInclusive	4294967295	
	minInclusive	0	
Source	<xs:element name="berechtigungNummer" type="ct:ReferenceNumberFour" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd		

Element tns:Berechtigung_ID_Type / kvp_ID

Namespace	No namespace		
Diagram			

Type	tns:Organisation_ID
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID
Properties	content: simple
Facets	maxInclusive 65535
	minInclusive 0
Source	<code><xs:element name="kvp_ID" type="ka:Organisation_ID" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:EFMProdukt_ID_Type / produktNummer


Namespace	No namespace
Diagram	
Type	tns:ReferenceNumberTwo
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo
Properties	content: simple
	minOccurs: 0
	maxOccurs: 1
Facets	maxInclusive 65535
	minInclusive 0
Source	<code><xs:element name="produktNummer" type="ct:ReferenceNumberTwo" minOccurs="0" maxOccurs="1" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:EFMProdukt_ID_Type / organisationID


Namespace	No namespace
Diagram	
Type	tns:Organisation_ID
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID
Properties	content: simple
Facets	maxInclusive 65535
	minInclusive 0
Source	<code><xs:element name="organisationID" type="ka:Organisation_ID" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:Ort_ID_Type / ortTyp


Namespace	No namespace
-----------	--------------

Diagram					
Type	tns:OrtsTyp_CODE_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:OrtsTyp_CODE_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<code><xs:element name="ortTyp" type="tns:OrtsTyp_CODE_Type" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				


Element tns:Ort_ID_Type / ortNummer

Namespace	No namespace				
Diagram					
Type	tns:ReferenceNumberThree				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Source	<code><xs:element name="ortNummer" type="ct:ReferenceNumberThree" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:Ort_ID_Type / ortDomaene_ID


Namespace	No namespace				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="ortDomaene_ID" type="ka:Organisation_ID" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:Terminal_ID_Type / terminalTyp


Namespace	No namespace
Diagram	
Type	tns:TerminalTyp_CODE_Type

Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:TerminalTyp_CODE_Type
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="terminalTyp" type="tns:TerminalTyp_CODE_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element tns:Terminal_ID_Type / terminalNumber

Namespace	No namespace
Diagram	
Type	tns:ReferenceNumberTwo
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo
Properties	content: simple
Facets	maxInclusive 65535
	minInclusive 0
Source	<code><xs:element name="terminalNumber" type="ct:ReferenceNumberTwo" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:Terminal_ID_Type / terminalOwner_ID

Namespace	No namespace
Diagram	
Type	tns:Organisation_ID
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID
Properties	content: simple
Facets	maxInclusive 65535
	minInclusive 0
Source	<code><xs:element name="terminalOwner_ID" type="ka:Organisation_ID" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:NmApplikationInstanz_ID_Type / NmAppInstanznummer

Namespace	No namespace
Diagram	
Type	tns:ReferenceNumberFour
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4

	<ul style="list-style-type: none"> • tns:ReferenceNumberFour
Properties	content: simple
Facets	maxInclusive 4294967295
	minInclusive 0
Source	<code><xs:element name="NmAppInstanznummer" type="ct:ReferenceNumberFour"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:NmApplikationInstanz_ID_Type / kvp_ID

Namespace	No namespace
Diagram	
Type	tns:Organisation_ID
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT2 • tns:ReferenceNumberTwo • tns:Organisation_ID
Properties	content: simple
Facets	maxInclusive 65535
	minInclusive 0
Source	<code><xs:element name="kvp_ID" type="ka:Organisation_ID"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:Transaktionsdatensatz_Type / Transaktionsdaten

Namespace	No namespace
Diagram	
Type	xs:hexBinary
Properties	content: simple
Source	<code><xs:element name="Transaktionsdaten" type="xs:hexBinary"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:SymSchluessel_ID_Type / schluesselNummer


Namespace	No namespace
Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="schluesselNummer" type="ct:INT1"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:SymSchluessel_ID_Type / schluesselVersion


Namespace	No namespace
Diagram	

Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="schluesselVersion" type="ct:INT1"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element **tns:SymSchluessel_ID_Type** / **schluesselInhaber_ID**

Namespace	No namespace
Diagram	
Type	tns:ReferenceNumberTwo
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo
Properties	content: simple
Facets	maxInclusive 65535
	minInclusive 0
Source	<code><xs:element name="schluesselInhaber_ID" type="ct:ReferenceNumberTwo"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element **tns:ASymSchluessel_ID_Type** / **signaturSchluessel**

Namespace	No namespace
Diagram	
Type	tns:OctetString12
Properties	content: simple
Facets	length 12
Source	<code><xs:element name="signaturSchluessel" type="ct:OctetString12"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:appNmTransaktionMAC_Type** / **appMAC_AH**

Namespace	No namespace
Diagram	
Type	tns:OctetString8
Properties	content: simple
Facets	length 8
Source	<code><xs:element name="appMAC_AH" type="ct:OctetString8"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:appNmTransaktionMAC_Type** / **appMAC_KVP**

Namespace	No namespace
Diagram	

Type	tns:OctetString8
Properties	content: simple
Facets	length 8
Source	<code><xs:element name="appMAC_KVP" type="ct:OctetString8" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:appNmTransaktionMAC_Type / appMAC_AH_Schluessel_ID

Namespace	No namespace
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><appMAC_AH_Schluessel_ID> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </appMAC_AH_Schluessel_ID></pre>
Source	<code><xs:element name="appMAC_AH_Schluessel_ID" type="tns:SymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:appNmTransaktionMAC_Type / appMAC_KVP_Schluessel_ID

Namespace	No namespace
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><appMAC_KVP_Schluessel_ID> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </appMAC_KVP_Schluessel_ID></pre>
Source	<code><xs:element name="appMAC_KVP_Schluessel_ID" type="tns:SymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:berNmTransaktionMAC_Type / berMAC_PV

Namespace	No namespace
Diagram	
Type	tns:OctetString8

Properties	content: simple
Facets	length 8
Source	<code><xs:element name="berMAC_PV" type="ct:OctetString8"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element `tns:berNmTransaktionMAC_Type / berMAC_KVP`

Namespace	No namespace
Diagram	
Type	tns:OctetString8
Properties	content: simple
Facets	length 8
Source	<code><xs:element name="berMAC_KVP" type="ct:OctetString8"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element `tns:berNmTransaktionMAC_Type / berMAC_PV_Schluessel_ID`

Namespace	No namespace
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><berMAC_PV_Schluessel_ID> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </berMAC_PV_Schluessel_ID></pre>
Source	<code><xs:element name="berMAC_PV_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element `tns:berNmTransaktionMAC_Type / berMAC_KVP_Schluessel_ID`

Namespace	No namespace
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><berMAC_KVP_Schluessel_ID> <schluesselNummer>{1,1}</schluesselNummer></pre>

	<pre><schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </berMAC_KVP_Schluessel_ID></pre>
Source	<code><xs:element name="berMAC_KVP_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TX_RET_Type** / **transOrigID**

Namespace	No namespace
Diagram	<pre> graph LR transOrigID((transOrigID)) --- container(()) container --- transSequenznummer((transSequenznummer)) container --- transSenderRolle((transSenderRolle)) container --- transSender_ID((transSender_ID)) </pre>
Type	tns:IONTransaktion_ID_Type
Properties	content: complex
Model	transSequenznummer , transSenderRolle , transSender_ID
Children	transSenderRolle, transSender_ID, transSequenznummer
Instance	<pre><transOrigID> <transSequenznummer>{1,1}</transSequenznummer> <transSenderRolle>{1,1}</transSenderRolle> <transSender_ID>{1,1}</transSender_ID> </transOrigID></pre>
Source	<code><xs:element name="transOrigID" type="tns:IONTransaktion_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TX_RET_Type** / **transOrigSignatur**

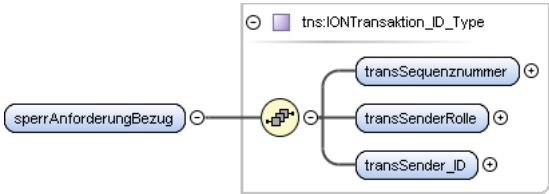
Namespace	No namespace
Diagram	<pre> graph LR transOrigSignatur((transOrigSignatur)) --- tnsTransSignatur_Type(tns:TransSignatur_Type) </pre>
Type	tns:TransSignatur_Type
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	length 128
Source	<code><xs:element name="transOrigSignatur" minOccurs="0" maxOccurs="1" type="tns:TransSignatur_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TX_RET_Type** / **transOriginalZeit**


Namespace	No namespace
Diagram	<pre> graph LR transOriginalZeit((transOriginalZeit)) --- xsdateTime(xs:dateTime) </pre>
Type	xs:dateTime
Properties	content: simple
Source	<code><xs:element name="transOriginalZeit" type="xs:dateTime"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TX_SMIT_Type** / **sperrAnforderungBezug**


Namespace	No namespace
-----------	--------------

Diagram	
Type	tns:IONTransaktion_ID_Type
Properties	content: complex
Model	transSequenznummer , transSenderRolle , transSender_ID
Children	transSenderRolle, transSender_ID, transSequenznummer
Instance	<pre><sperrAnforderungBezug> <transSequenznummer>{1,1}</transSequenznummer> <transSenderRolle>{1,1}</transSenderRolle> <transSender_ID>{1,1}</transSender_ID> </sperrAnforderungBezug></pre>
Source	<pre><xs:element name="sperrAnforderungBezug" type="tns:IONTransaktion_ID_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TX_SMIT_Type / sperrEntscheidung

Namespace	No namespace								
Diagram									
Type	tns:Mitteilung_CODE_Type								
Properties	content: simple								
Facets	<table border="1"> <tr><td>enumeration</td><td>1</td></tr> <tr><td>enumeration</td><td>2</td></tr> <tr><td>enumeration</td><td>3</td></tr> <tr><td>enumeration</td><td>4</td></tr> </table>	enumeration	1	enumeration	2	enumeration	3	enumeration	4
enumeration	1								
enumeration	2								
enumeration	3								
enumeration	4								
Source	<pre><xs:element name="sperrEntscheidung" type="tns:Mitteilung_CODE_Type" /></pre>								
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd								

Element tns:TX_SANF_Type / sperrSperrgrund

Namespace	No namespace				
Diagram					
Type	tns:INT1				
Properties	content: simple				
Facets	<table border="1"> <tr><td>maxInclusive</td><td>255</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<pre><xs:element name="sperrSperrgrund" type="ct:INT1" /></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TXA_Type / transAblehnungGrund

Namespace	No namespace
Annotations	<p>WICHTIG: Aus Historischen Gruenden ist TXA_Type ein allgemeiner Typ, der von allen teilnehmenden Systemen genutzt wird. Das fuehrt dazu, dass sich alle Systeme dieselben 'transAblehnungGrund' Fehlercodes teilen. Dies ist suboptimal, da, wann immer sich einer der 'transAblehnungGrund' Fehlercodes veraendert, alle teilnehmenden Systeme angepasst, getestet und in einer neuen Version zur Verfuegung gestellt werden muessten. Um TXA wie bisher weiterverwenden zu koennen, und um das beschriebene</p>

	<p>Abhaengigkeitsproblem zu vermeiden, wurde dieses Feld nicht mit expliziter Aufzaehlung der moeglichen Fehlercodes, sondern mit einem simplen numerischen Typen versehen. Die genauen Fehlercodes sind der Schnittstelle des jeweiligen konkreten teilnehmenden Systems zu entnehmen. Die Codes 0 bis 9 (einschliesslich) sind fuer allgemeine Fehler reserviert und duerfen von den teilnehmenden Systemen nur fuer die vorgesehene Semantik verwendet werden (siehe Typ 'CommonServiceResultCode'). Es wird empfohlen, fuer die vollstaendigkeit der Schnittstelle, in den XSDs des jeweiligen Systems einen Aufzaehlungstypen vom Basistypen 'ct:INT1' mit den jeweiligen Fehlercodes des Systems zu definieren.</p>				
Diagram					
Type	tns:INT1				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<pre><xs:element name="transAblehnungGrund" type="ct:INT1"> <xs:annotation> <xs:documentation>WICHTIG: Aus Historischen Gruenden ist TXA_Type ein allgemeiner Typ, der von allen teilnehmenden Systemen genutzt wird. Das fuehrt dazu, dass sich alle Systeme dieselben 'transAblehnungGrund' Fehlercodes teilen. Dies ist suboptimal, da, wann immer sich einer der 'transAblehnungGrund' Fehlercodes veraendert, alle teilnehmenden Systeme angepasst, getestet und in einer neuen Version zur Verfuegung gestellt werden muessten. Um TXA wie bisher weiterverwenden zu koennen, und um das beschriebene Abhaengigkeitsproblem zu vermeiden, wurde dieses Feld nicht mit expliziter Aufzaehlung der moeglichen Fehlercodes, sondern mit einem simplen numerischen Typen versehen. Die genauen Fehlercodes sind der Schnittstelle des jeweiligen konkreten teilnehmenden Systems zu entnehmen. Die Codes 0 bis 9 (einschliesslich) sind fuer allgemeine Fehler reserviert und duerfen von den teilnehmenden Systemen nur fuer die vorgesehene Semantik verwendet werden (siehe Typ 'CommonServiceResultCode'). Es wird empfohlen, fuer die vollstaendigkeit der Schnittstelle, in den XSDs des jeweiligen Systems einen Aufzaehlungstypen vom Basistypen 'ct:INT1' mit den jeweiligen Fehlercodes des Systems zu definieren.</xs:documentation> </xs:annotation> </xs:element> </xs:element></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TXAS_Type / transSendeAuftrag

Namespace	No namespace						
Diagram							
Type	restriction of tns:PrintableString						
Type hierarchy	<ul style="list-style-type: none"> xs:string tns:PrintableString 						
Properties	content: simple						
Facets	<table> <tr> <td>minLength</td><td>0</td></tr> <tr> <td>maxLength</td><td>10</td></tr> <tr> <td>pattern</td><td>[-p]*</td></tr> </table>	minLength	0	maxLength	10	pattern	[-p]*
minLength	0						
maxLength	10						
pattern	[-p]*						
Source	<pre><xs:element name="transSendeAuftrag"> <xs:simpleType> <xs:restriction base="tns:PrintableString"> <xs:minLength value="0"/> <xs:maxLength value="10"/> </xs:restriction> </xs:simpleType> </xs:element></pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element tns:TXAS_Type / transSendeAuftragstyp

Namespace	No namespace
Diagram	
Type	tns:AuftragsTyp_CODE

Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:AuftragsTyp_CODE
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="transSendeAuftragstyp" type="tns:AuftragsTyp_CODE" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXDEABER_Req_Type / prodAkzeptanzEnde

Namespace	No namespace
Diagram	
Type	tns:Date
Properties	content: simple
Source	<code><xs:element name="prodAkzeptanzEnde" type="ct:Date" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXDEABER_Req_Type / prodProdukt_ID

Namespace	No namespace
Diagram	
Type	tns:EFMProdukt_ID_Type
Properties	content: complex
Model	produktNummer{0,1} , organisationID
Children	organisationID, produktNummer
Instance	<pre><prodProdukt_ID> <produktNummer>{0,1}</produktNummer> <organisationID>{1,1}</organisationID> </prodProdukt_ID></pre>
Source	<code><xs:element name="prodProdukt_ID" type="tns:EFMProdukt_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSMITA_Type / appSperrkandidat

Namespace	No namespace
Diagram	
Type	tns:NmApplikationInstanz_ID_Type
Properties	content: complex nillable: false
Model	NmAppInstanznummer , kvp_ID
Children	NmAppInstanznummer, kvp_ID
Instance	<code><appSperrkandidat></code>

	<pre> <NmAppInstanznummer>{1,1}</NmAppInstanznummer> <kvp_ID>{1,1}</kvp_ID> </appSperrkandidat> </pre>
Source	<code><xs:element name="appSperrkandidat" type="tns:NmApplikationInstanz_ID_Type" nillable="false"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TXSANFSYMK_Type** / **keySperrkandidatsym**

Namespace	No namespace
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre> <keySperrkandidatsym> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </keySperrkandidatsym> </pre>
Source	<code><xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TXSANFASYMK_Type** / **keySperrkandidatasym**

Namespace	No namespace
Diagram	
Type	tns:ASymSchluessel_ID_Type
Properties	content: complex
Model	signaturSchluessel
Children	signaturSchluessel
Instance	<pre> <keySperrkandidatasym> <signaturSchluessel>{1,1}</signaturSchluessel> </keySperrkandidatasym> </pre>
Source	<code><xs:element name="keySperrkandidatasym" type="tns:ASymSchluessel_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TXSFREIMITSYMK_Type** / **keySperrkandidatsym**

Namespace	No namespace
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex

Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><keySperrkandidatsym> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </keySperrkandidatsym></pre>
Source	<code><xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TXSFREIMITASYMK_Type** / **keySperrkandidatsym**

Namespace	No namespace
Diagram	
Type	tns:ASymSchluessel_ID_Type
Properties	content: complex
Model	signaturSchluessel
Children	signaturSchluessel
Instance	<pre><keySperrkandidatsym> <signaturSchluessel>{1,1}</signaturSchluessel> </keySperrkandidatsym></pre>
Source	<code><xs:element name="keySperrkandidatsym" type="tns:ASymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TXSMITSYMK_Type** / **keySperrkandidatsym**

Namespace	No namespace
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><keySperrkandidatsym> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </keySperrkandidatsym></pre>
Source	<code><xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TXSMITASYMK_Type** / **keySperrkandidatsym**

Namespace	No namespace
Diagram	

Type	tns:ASymSchluessel_ID_Type
Properties	content: complex
Model	signaturSchluessel
Children	signaturSchluessel
Instance	<pre><keySperrkandidat asym> <signaturSchluessel>{1,1}</signaturSchluessel> </keySperrkandidat asym></pre>
Source	<code><xs:element name="keySperrkandidat asym" type="tns:ASymSchluessel_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSNAWA_Req_Type / samSperrkandidat

Namespace	No namespace				
Diagram					
Type	tns:SAM_ID_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT3 <ul style="list-style-type: none"> tns:ReferenceNumberThree <ul style="list-style-type: none"> tns:SAM_ID_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Source	<code><xs:element name="samSperrkandidat" type="tns:SAM_ID_Type"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TXSNAWA_Req_Type / orgSperrkandidat


Namespace	No namespace				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT2 <ul style="list-style-type: none"> tns:ReferenceNumberTwo <ul style="list-style-type: none"> tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="orgSperrkandidat" type="ka:Organisation_ID"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TXSNAWA_Req_Type / zyklusNummer

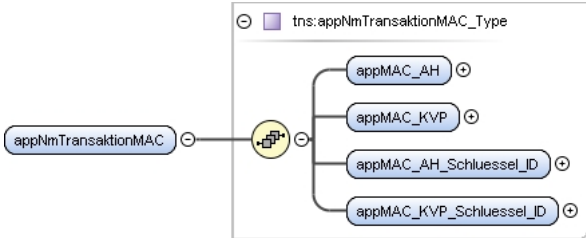
Namespace	No namespace
Annotations	<p>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</p>

Diagram					
Type	tns:SperrlistenZyklusNummer_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SperrlistenZyklusNummer_Type 				
Properties	content: simple				
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>4294967295</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Source	<pre><xs:element name="zyklusNummer" type="tns:SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</xs:documentation> </xs:annotation> </xs:element></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TXSNAWA_Req_Type / sperrtransaktionApplikation


Namespace	No namespace
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><sperctransaktionApplikation> <Transaktionsdaten>{1,1}</Transaktionsdaten> </sperctransaktionApplikation></pre>
Source	<pre><xs:element name="sperctransaktionApplikation" type="tns:Transaktionsdatensatz_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSNAWA_Req_Type / appNmTransaktionMAC


Namespace	No namespace
Diagram	
Type	tns:appNmTransaktionMAC_Type
Properties	content: complex
Model	appMAC_AH , appMAC_KVP , appMAC_AH_Schluesel_ID , appMAC_KVP_Schluesel_ID
Children	appMAC_AH, appMAC_AH_Schluesel_ID, appMAC_KVP, appMAC_KVP_Schluesel_ID
Instance	<pre><appNmTransaktionMAC> <appMAC_AH>{1,1}</appMAC_AH> <appMAC_KVP>{1,1}</appMAC_KVP> <appMAC_AH_Schluesel_ID>{1,1}</appMAC_AH_Schluesel_ID></pre>

	<code><appMAC_KVP_Schluesssel_ID>{1,1}</appMAC_KVP_Schluesssel_ID> </appNmTransaktionMAC></code>
Source	<code><xs:element name="appNmTransaktionMAC" type="tns:appNmTransaktionMAC_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element tns:TXSNAWB_Req_Type / samSperrkandidat

Namespace	No namespace				
Diagram					
Type	tns:SAM_ID_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree tns:SAM_ID_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Source	<code><xs:element name="samSperrkandidat" type="tns:SAM_ID_Type" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TXSNAWB_Req_Type / orgSperrkandidat

Namespace	No namespace				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="orgSperrkandidat" type="ka:Organisation_ID" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TXSNAWB_Req_Type / zyklusNummer

Namespace	No namespace
Annotations	Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.
Diagram	
Type	tns:SperrlistenZyklusNummer_Type
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4

	<ul style="list-style-type: none"> • tns:SperrlistenZyklusNummer_Type
Properties	content: simple
Facets	maxInclusive 4294967295
	minInclusive 0
Source	<pre><xs:element name="zyklusNummer" type="tns:SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element tns:TXSNAWB_Req_Type / sperrrtransaktionBerechtigung

Namespace	No namespace
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><sperrrtransaktionBerechtigung> <Transaktionsdaten>{1,1}</Transaktionsdaten> </sperrrtransaktionBerechtigung></pre>
Source	<pre><xs:element name="sperrrtransaktionBerechtigung" type="tns:Transaktionsdatensatz_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element tns:TXSNAWB_Req_Type / berNmTransaktionMAC

Namespace	No namespace
Diagram	
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schlüssel_ID , berMAC_KVP_Schlüssel_ID
Children	berMAC_KVP, berMAC_KVP_Schlüssel_ID, berMAC_PV, berMAC_PV_Schlüssel_ID
Instance	<pre><berNmTransaktionMAC> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schlüssel_ID>{1,1}</berMAC_PV_Schlüssel_ID> <berMAC_KVP_Schlüssel_ID>{1,1}</berMAC_KVP_Schlüssel_ID> </berNmTransaktionMAC></pre>
Source	<pre><xs:element name="berNmTransaktionMAC" type="tns:berNmTransaktionMAC_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:VX_Message_Type / StatusCode

Namespace	No namespace		
Diagram			
Type	tns:StatusCode		
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:StatusCode 		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Die Nachricht wurde erfolgreich entgegengenommen und alle notwendigen Informationen zur Weiterleitung liegen vor.
	enumeration	1	Ungueltige Nachricht. Die Sender ID oder die Routing Information kann nicht aus dem SOAP Header extrahiert werden.
	enumeration	2	Ungleiche Sender ID. Die Sender ID, die im SOAP Header uebertragen wurde passt nicht zu der Sender ID, die in der VM zum Zertifikat des Senders hinterlegt wurde.
	enumeration	3	Unbekannter oder gesperrter Empfaenger oder zu den Routing Informationen ist in der VM keine technische Empfaengeradresse hinterlegt.
	enumeration	4	Verbindungsproblem zum Empfaenger. Es konnte keine Verbindung zum Empfaenger aufgebaut werden.
	enumeration	5	Timeout. Der Empfaenger antwortet nicht in einer vorgegebenen Zeit.
	enumeration	6	Die asynchrone Nachricht kann nicht zwischengespeichert werden.
	enumeration	7	Die Organisations-ID des Senders ist gesperrt oder der Vermittlungsstelle nicht bekannt.
	enumeration	255	Technisches Problem. Es liegt ein technisches Problem vor. Die Nachricht konnte nicht erfolgreich entgegengenommen werden.
Source	<xs:element name="StatusCode" type="tns:StatusCode" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd		

Element tns:VX_Message_Type / StatusText

Namespace	No namespace		
Diagram			
Type	tns:StatusText		
Properties	content:	simple	
Facets	maxLength	255	
Source	<xs:element name="StatusText" type="tns:StatusText" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd		